


## OWNER'S MANUAL: Desktop Open Frame 2 Post Rack

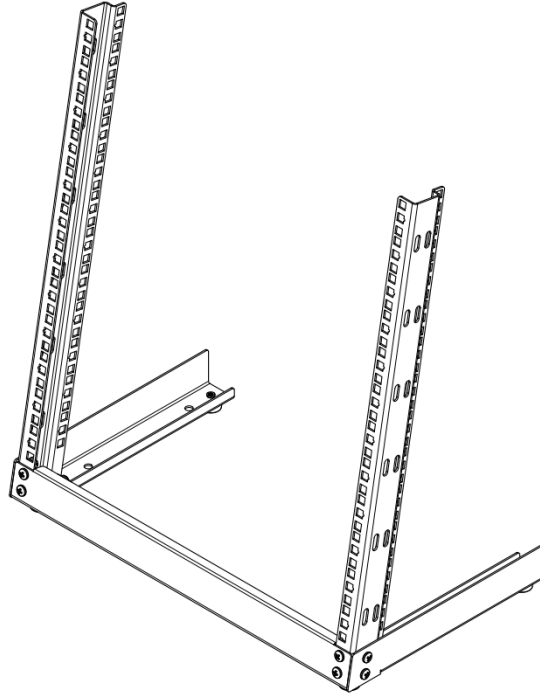

THIS MANUAL APPLIES TO THE FOLLOWING SKUs: SMC-2POST-02-12U, SM-2POST-8UDSK-M6

Keep this information for further reference.

Thank you for purchasing a ShowMeCables product. If you have any questions regarding the installation or use of your product, please call us at 888-519-9505.


Please examine the product for any damaged parts. If any part is damaged or missing, contact ShowMeCables for assistance. Do not attempt to install or use product if it has been damaged.

During installation, lay product contents on cardboard or other protective surface to avoid any damage.

Improper installation or use of this product could result in damage to the product, other equipment, or personal injury. It is recommended that installation be performed by a qualified installer. ShowMeCables cannot be held responsible for damage to equipment or personal injury resulting from improper use or installation of product. If product is intended to store/mount equipment, please ensure the equipment stored/mounted does not exceed the specified weight capacity. Install the heaviest equipment first and install it at the bottom of the rack. Install equipment starting from the bottom of the rack and move upward.

**Limitations of Liability:** In no event will ShowMeCables, LLC. be liable for any damages, whether direct or indirect, special, punitive, incidental or consequential damages (including, but not limited to, lost profits or revenue, loss of use, lost business opportunities or loss of goodwill) or for the costs of procuring substitute products, arising out of or in connection with the use of the product, whether such liability arises from any claim based upon contract, warranty, tort (including negligence), product liability or otherwise, whether or not seller has been advised of the possibility of such loss or damage. In no event will seller's total cumulative liability, from all causes of action and all theories of liability, exceed the total amounts actually paid to seller by customer under the order that gives rise to any liability hereunder.

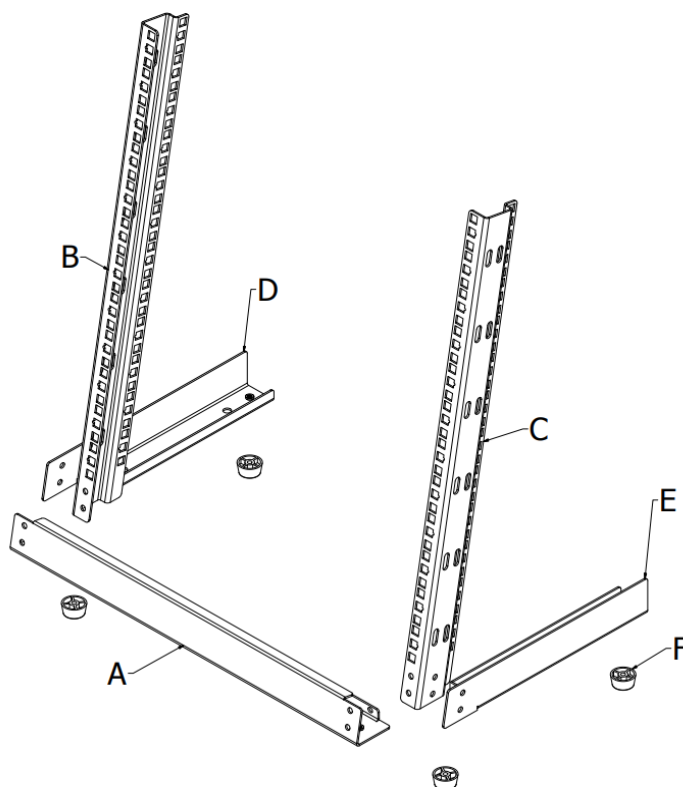


## 1. Parts Identification






### Rack Components

<b>A</b> Front Base	<b>D</b> Left Base
<b>B</b> Left Vertical Rail	<b>E</b> Right Base
<b>C</b> Right Vertical Rail	<b>F</b> Plastic Feet (x4)

### Rack Installation Hardware

<b>G</b>	<b>H</b>	<b>I</b>
		
M6*12mm Screws (x10)	M6 Flange Nuts (x10)	M5*12mm Screws (x4)


### Equipment Mounting Hardware

<b>J</b>	<b>K</b>	<b>L</b>
		
M6 Mounting Screws 9U (x12) 12U (x12)	M6 Plastic Washers 9U (x12) 12U (x12)	M6 Cage Nuts 9U (x12) 12U (x12)

**Tools Required:** Phillips Screwdriver (not included)


## 2. Rack Assembly

### Assemble Front Base to Left and Right Base

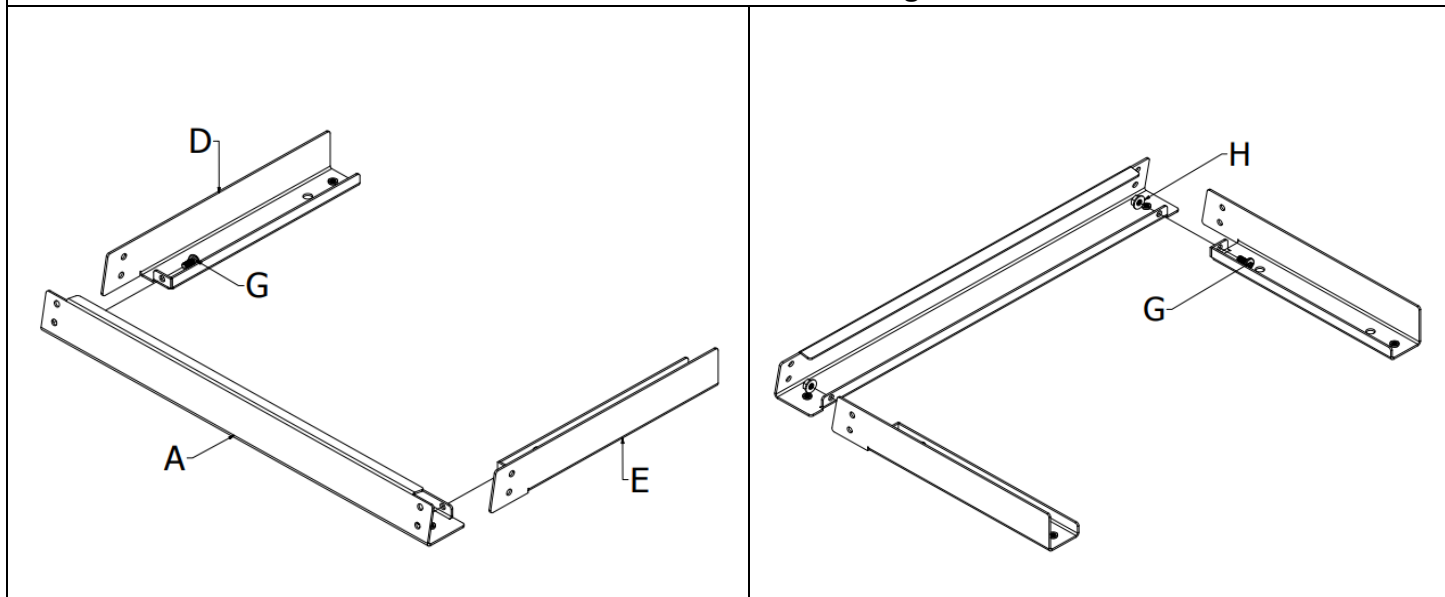


Attach Front Base (A) to the Left Base (D) and Right Base (E) and secure them with 2 of the M6\*12mm Screws (G) and 2 of the M6 Flange Nuts (H) using a Phillips Screwdriver (not included).

### Assemble Left and Right Vertical Rail

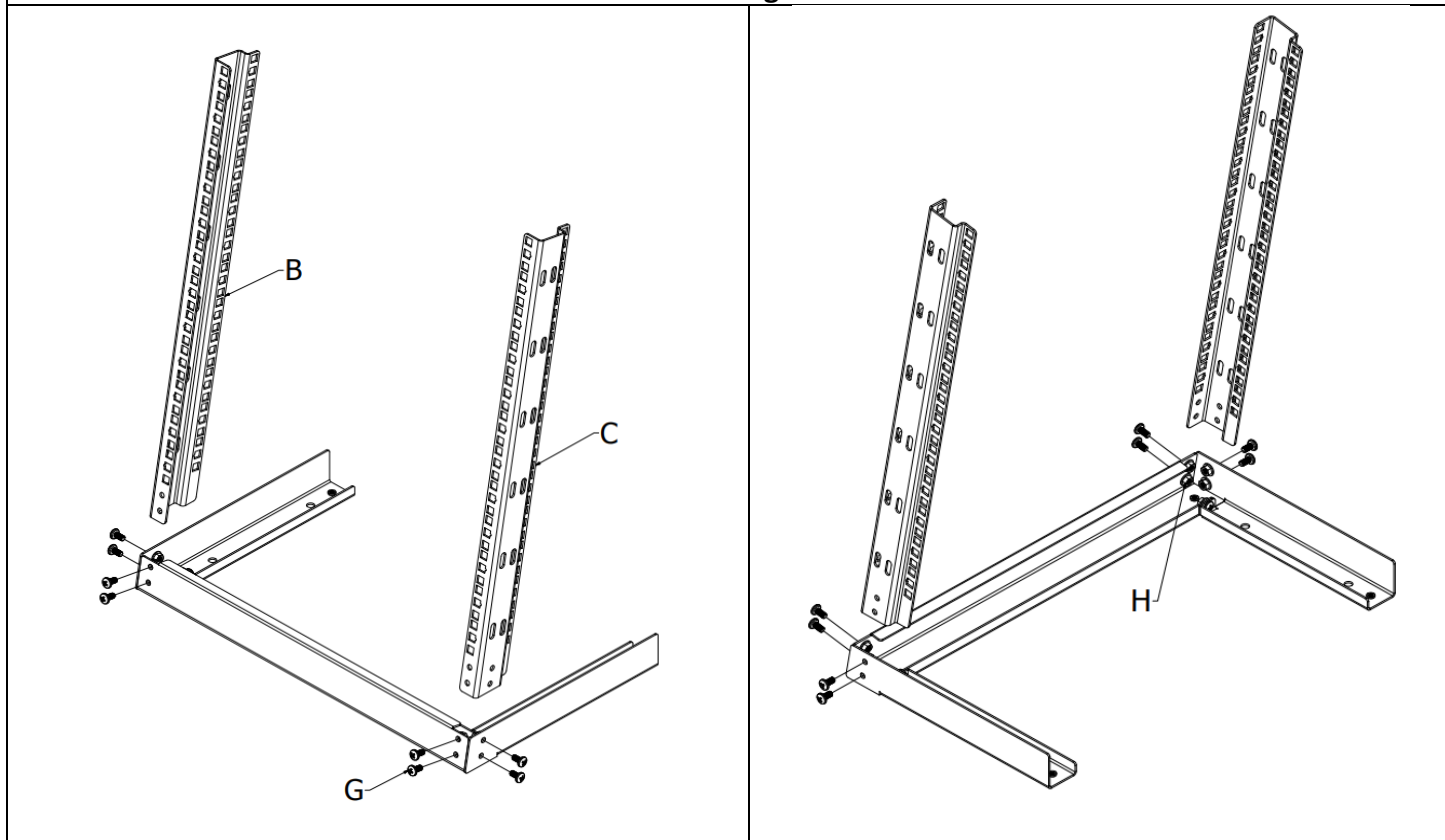



Attach Left Vertical Rail (B) and Right Vertical Rail (C) to the frame built above and secure them with 8 of the M6\*12mm Screws (G) and 8 of the M6 Flange Nuts (H) using a Phillips Screwdriver (not included).

### Assemble Plastic feet

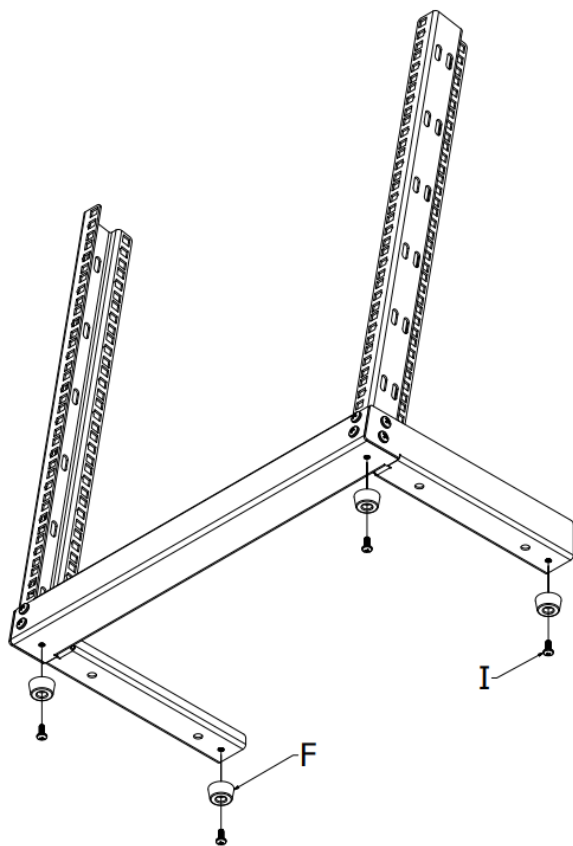


Attach 4 Plastic feet (F) to the frame built above and secure them with 4 of the M5\*12mm Screws (I) using a Phillips Screwdriver (not included).

### 3. Equipment Installation

1 Rack Unit	
 <p>1.750" (44.45mm)</p>	 <p>0.625" (15.90mm) 0.625" (15.90mm)</p>

#### -Installing Cage Nuts

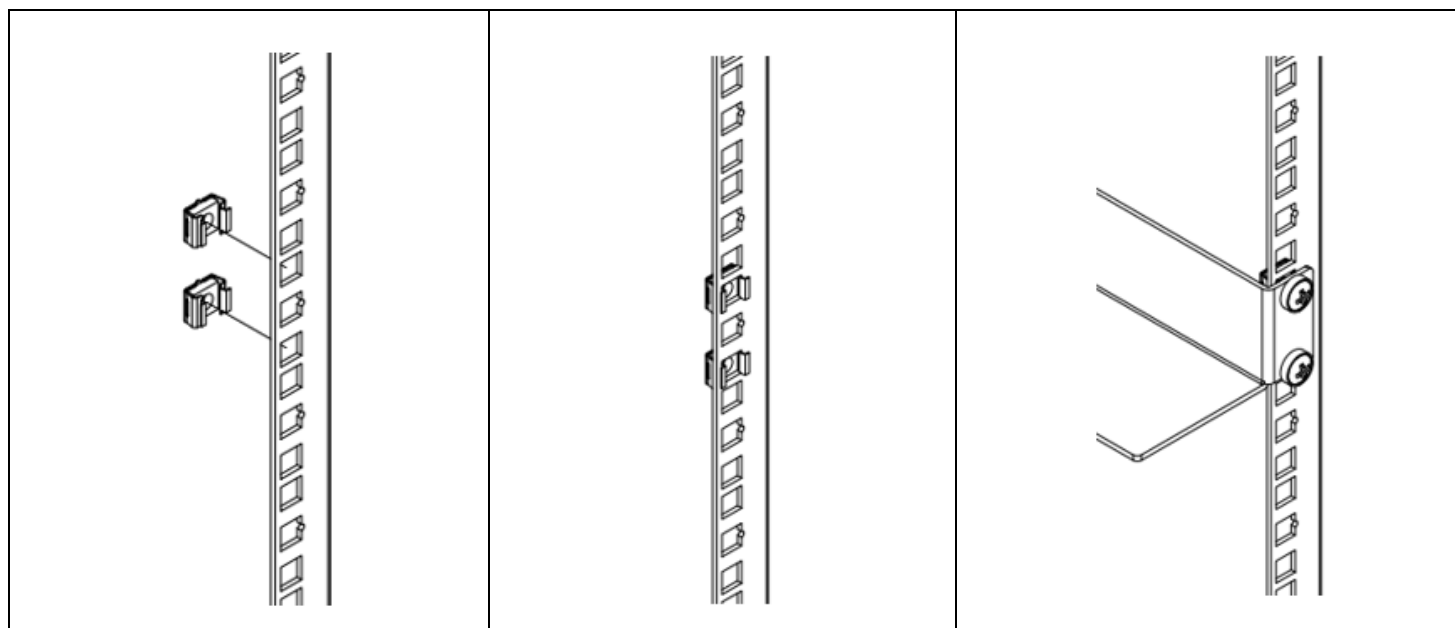

**1** Locate the numbered square openings in the mounting rails where you plan to install your equipment. You will install cage nuts (included) into the square openings to provide an attachment point for the mounting screws (included). Note: Consult your equipment documentation to determine how many cage nuts will be required and where they will need to be installed.

**a-** From the inside of the mounting rail, insert one of the flanges of the cage nut through the square opening. Press it against the side of the square opening. Each flange should engage one side of the square opening, not the top or bottom.

**b-** Compress the cage nut at the sides slightly to allow the remaining flange to fit through the square opening. When the cage nut is properly installed, both flanges will protrude through the square opening and will be visible on the outer surface of the mounting rail. Repeat steps 1a and 1b until all required cage nuts are installed.

**2** After installing the required cage nuts, use the included black mounting screws and plastic washers to secure your equipment to the rack rail. Place the plastic washers between the screws and the equipment mounting brackets.