


## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-15296	01/08/2026	HBAKKE	DGUST

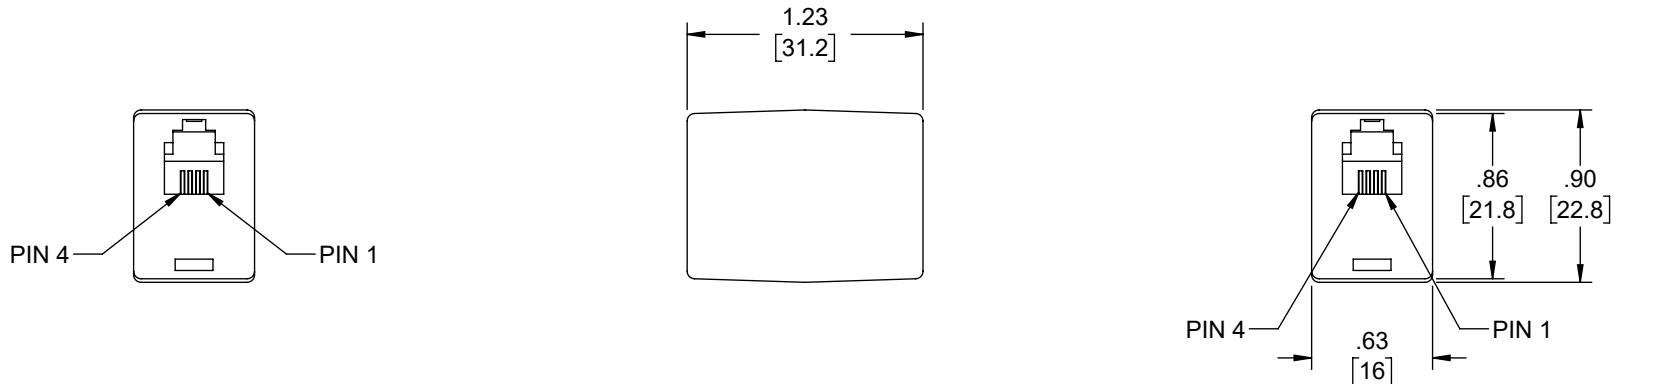

## NOTES:

1. ELECTRICAL:  
VOLTAGE RATING: 125 VAC RMS  
CURRENT RATING: 1.5 AMP  
CONTACT RESISTANCE: 100 MILLIOHMS MAX  
INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC  
DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1 MIN
2. ENVIRONMENTAL:  
STORAGE: -40°C TO +85°C  
OPERATION: 0°C TO 70°C  
CONFORMS TO TIA/EIA 568B CATEGORY 3.
3. MECHANICAL:  
HOUSING MATERIAL: ABS  
PCB MATERIAL: FR-4, THICKNESS: 1.6mm  
CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.35mm  
IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0.50mm NICKEL PLATING  
WIRE: AWG 22-26

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X =  $\pm .2$  [5] FRACTIONS  
XX =  $\pm .02$  [0.5]  $\pm 1/32$   
XXX =  $\pm .005$  [0.13] ANGLES  $\pm 1^\circ$

CABLE LENGTH TOLERANCES:  
≤12 [305] =  $\pm 1$  [25] / -0  
>12 [305] ≤ 60 [1524] =  $\pm 2$  [51] / -0  
>60 [1524] ≤ 120 [3048] =  $\pm 4$  [102] / -0  
>120 [3048] ≤ 300 [7620] =  $\pm 6$  [152] / -0  
>300 [7620] =  $\pm 5\%$  / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE  
UN-DIMENIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**Show Me™**  
CABLES  
an INFINITB brand

Website: [www.ShowMeCables.com](http://www.ShowMeCables.com)  
Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE SHEET  
NONE 1 OF 1

DESCRIPTION  
RJ22 FEMALE TO RJ22 FEMALE HANDSET CORD INLINE  
COUPLER ADAPTER - STRAIGHT PINOUT

SIZE A	CAGE CODE 3SVT8	DRAWN BY HBAKKE	ITEM NO. 1067	REV B
-----------	--------------------	--------------------	------------------	----------