




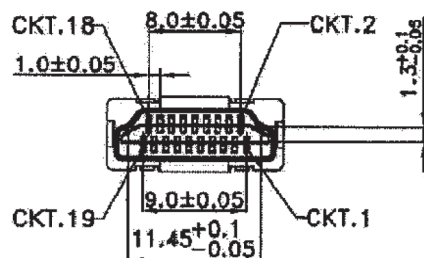





RoHS Compliant


REVISIONS			
ZONE	REV	DESCRIPTION	DATE
	2	Add Electrical Characteristics	3/18/2019

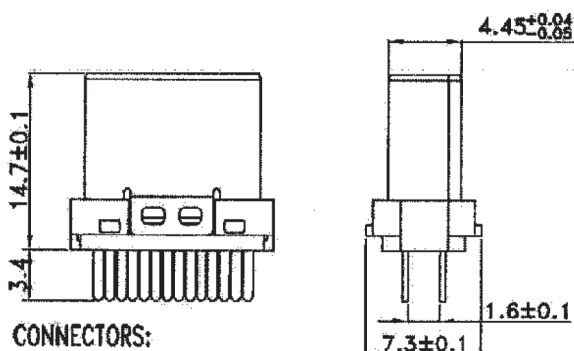

Shell

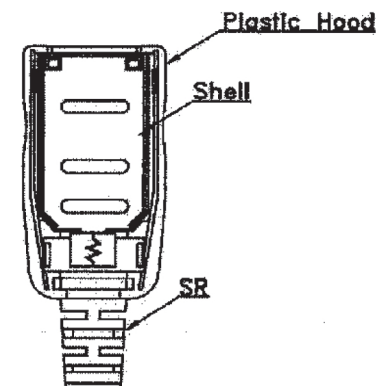

Plastic Hood

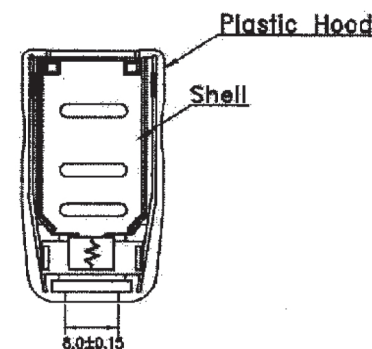

CONNECTORS:

HDMI 19PIN MALE CLIP TYPE.

PIN CONTACT: PHOSPHOR BRONZE WITH GOLD PLATED.

INSULATOR: BLACK COLOR P.B.T UL94V-0 RATED.

PCB: FR/4

SHELL: STEEL WITH GOLD PLATED.

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 0.5 Amp

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

INSULATOR RESISTANCE: >600M Ω /MinCONTACT RESISTANCE: >30M Ω /Max

OPERATION TEMPERATURE: -50°C~+105°C

FEATURES:

HDMI Round cable straight exit.

Steel inner shell With OD: ϕ 5.5 , ϕ 6.5


Full EMI/RFI shielded


MATERIALS:

Hood: Plastic ABS PA-765A

Inner Shell: Steel , Nickel plated

SR: PVC Molded



BY	DATE		
DRAWN			
CHK'D		Title: HDMI Male Solder Connector Kit	
APPRV			
MATERIAL		Part No: 1115	
FINISH			
SCALE		NONE	SHEET 1 of 1

030-48

030-48