

6

5


4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	ECO-15391	03/13/2026	AKRESOWSKI	DGUST

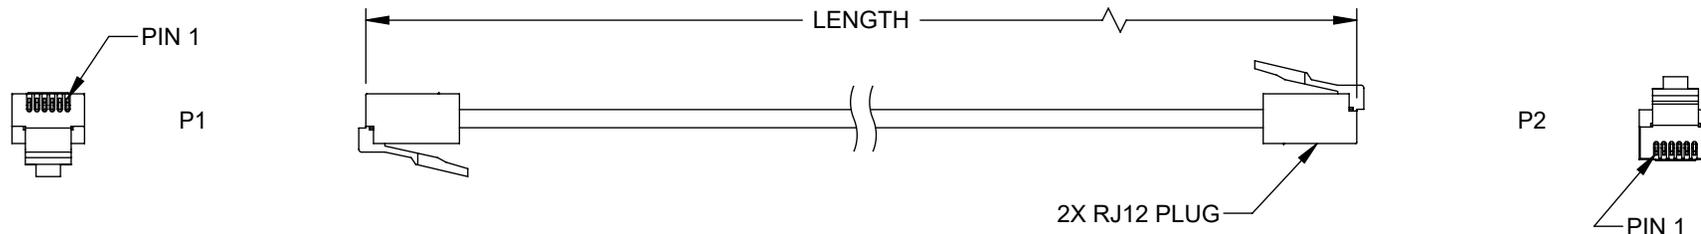

ITEM NO.	LENGTH	
	FEET	METERS
15-302-003S	3.00	0.91
15-302-007S	7.00	2.13
15-302-014S	14.00	4.27
15-302-025S	25.00	7.62
15-302-050S	50.00	15.24
15-302-100S	100.00	30.48
15-302-150S	150.00	45.72

WIRING MAP		
P1	COLOR	P2
1	WHITE	1
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5
6	BLUE	6


NOTES:

- MATERIAL:**
PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
- FINISH:**
CONTACTS: 50 μ IN GOLD IN CONTACT AREA OVER 100 μ IN NICKEL PLATE OVERALL.
- CABLE CHARACTERISTICS:**
SIX-CONDUCTOR, 26 AWG STRANDED FLAT MODULAR CABLE, SILVER SATIN PVC OUTER JACKET U.L. STYLE 20251.
- PLUG CONFORMS TO TIA-1096.
- OPERATING TEMPERATURE RANGE: -20°C TO +60°C.
- CABLES SHALL BE TESTED FOR CONTINUITY.
- CABLES SHALL BE INDIVIDUALLY PACKAGED IN A POLYBAG.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS
TOLERANCES:
.X = ± 2 [5]
.XX = ± 0.2 [0.5]
.XXX = ± 0.005 [0.13]
FRACTIONS $\pm 1/32$
ANGLES $\pm 1^\circ$
CABLE LENGTH TOLERANCES:
≤ 12 [305] = ± 1 [25] / -0
>12 [305] ≤ 60 [1524] = ± 2 [51] / -0
>60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
>120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
>300 [7620] = $\pm 5\%$ / -0
CABLE LENGTH TOL IAW IPC A-620
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY

 Show Me CABLES an INFINITE company Website: www.ShowMeCables.com Phone: 1.888.519.9505		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE NONE	SHEET 1 OF 1
DESCRIPTION RJ12 TO RJ12 FLAT CABLE ASSY, 6 COND, 26 AWG, STRAIGHT			
SIZE A	CAGE CODE 3SVT8	DRAWN BY AKRESOWSKI	ITEM NO. 15-302-XXXX
			REV A

6

5

4

3

2

1