

6

5

4

3





2

1


REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	ECO-15476	02/02/2026	DMAY	DGUST

PART NUMBER	RATING
15-710-001	CAT5e/CAT6
15-710-002	CAT6A

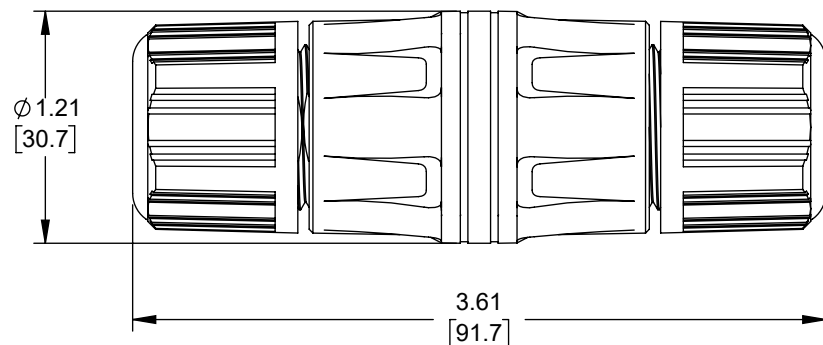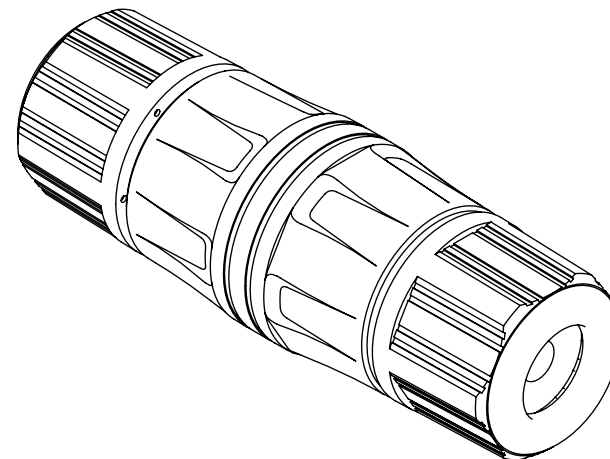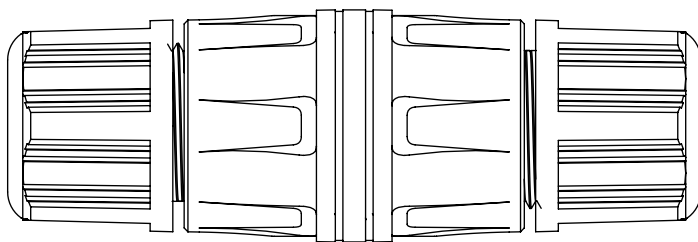


SMALL ID



LARGE ID

(2X) SMALL ID GROMMET (COMES INSTALLED IN ASSEMBLY)
(2X) LARGE ID GROMMET (INCLUDED LOOSE IN PACKAGING)



RECOMMENDED
PANEL CUTOUT
MAX RECOMMENDED
PANEL THICKNESS: .175 [4.5]

NOTES:

1. INGRESS PROTECTION RATING IS IP68 WHEN FULLY ASSEMBLED TO CABLE.
2. TEST SPECIMEN TESTED BY IMMERSING IN 1 METER OF WATER FOR 24 HOURS.
3. COUPLER SHALL BE TESTED FOR WIRE MAP, NEXT, PS NEXT, ACR, PS ACR & RL
4. OPERATING TEMPERATURE: -40°C TO +80°C
5. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED FULLY ASSEMBLED WITH SMALL ID GROMMETS INSTALLED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 2

DESCRIPTION

CPLR SHLD RJ45 IP68

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	15-710-00X	A