LC/ST 9/125 Singlemode Duplex Plenum Fiber Patch Cables

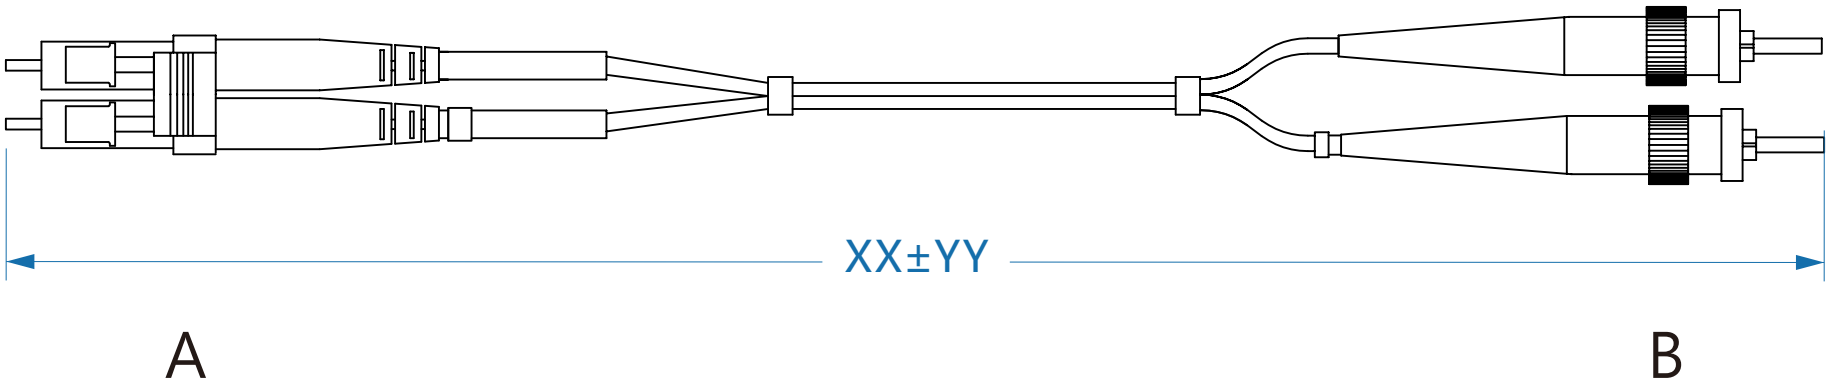

XX	YY
XX≤1M	YY±50MM
XX>1M	YY±100MM

RoHS

1. Connector A: LC/UPC SM BOOT: White
   Connector B: ST/UPC SM BOOT: Black
2. Cable Type: Duplex φ2.0mm Singlemode 9/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Yellow
5. Insertion Loss(IL): ≤0.20dB(PC/UPC) ≤0.30dB(PC/APC)
6. Return Loss(RL): PC≥50dB UPC≥55dB APC≥65dB
7. Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
8. Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
9. Operating Temperature: -20 Centigrate to +70 Centigrate
10. Storage Temperature: -40 Centigrate to +85 Centigrate
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3
    GR-326-CORE

PART NO.	31-112-XX				
TITLE	LC/ST 9/125 Singlemode Duplex Plenum Fiber Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND	CORE CABLES			
APPROVED	TOM				