


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

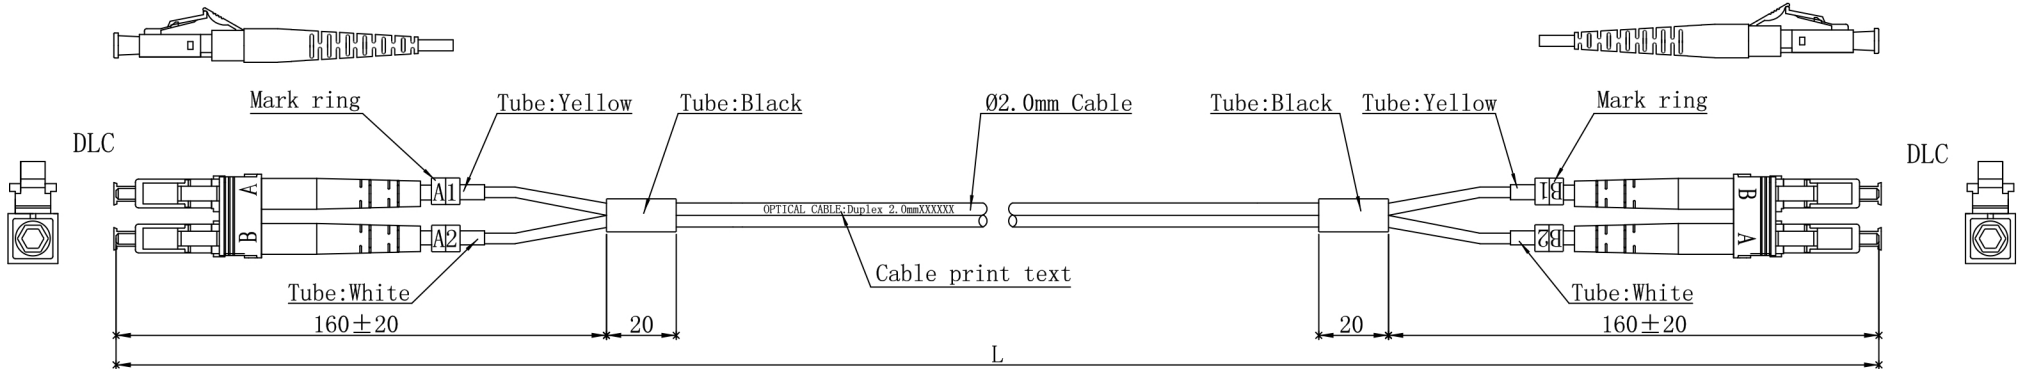


Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM2
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Orange
Cable Diameter(mm)	Ø2.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
$L > 5m$, TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

Remarks:

Length	ITEM NO.
L=1M	102764
L=2M	102765
L=3M	102766
L=5M	102767
L=7M	102823
L=10M	102824
L=15M	102947

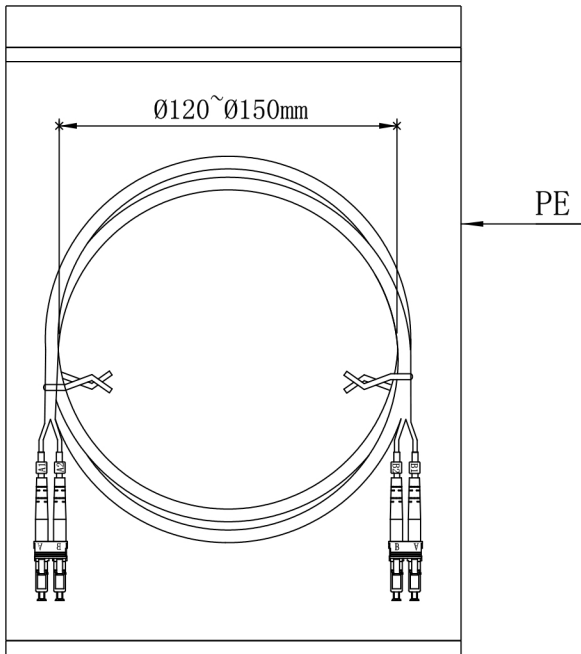

Show Me

CABLES

cables & connectors since 1995

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing,
tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

DRAWN BY	DATE: 2015/05/14	2 Meter - Multimode Fiber Patch Cable 50/125 - LC/LC
CHECKED BY	SHEET 1of1	P/N: 32-307-02M
APPROVED BY	SCALE 1:1	REV. 00
	UNIT:mm	