


LC/SC 50/125 Multimode Duplex Fiber Patch Cables - OM2



1. Connector A: SC/UPC MM
- Connector B: LC/UPC MM
2. Cable Type: Duplex ϕ 2.0mm Multimode 50/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Orange
5. Insertion Loss(IL): $\leq 0.20\text{dB(PC/UPC)}$
- Return Loss(RL): $\geq 35\text{dB(PC/UPC)}$
6. Maximum Attenuation: 3.5/1.5 dB/km (850/1300)
7. Min Bendwidth: 200/500 MHz.km
8. Min Bending Radius: 4cm (Loaded), 2cm (Unloaded)
9. Operating Temperature: -20 Centigrate to +70 Centigrate
10. Storage Temperature: -40 Centigrate to +85 Centigrate
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3
- BELLCORE GR-409
- UL OFNR/FT4

XX	YY
XX $\leq$ 1M	YY $\pm$ 50MM
XX $>$ 1M	YY $\pm$ 100MM

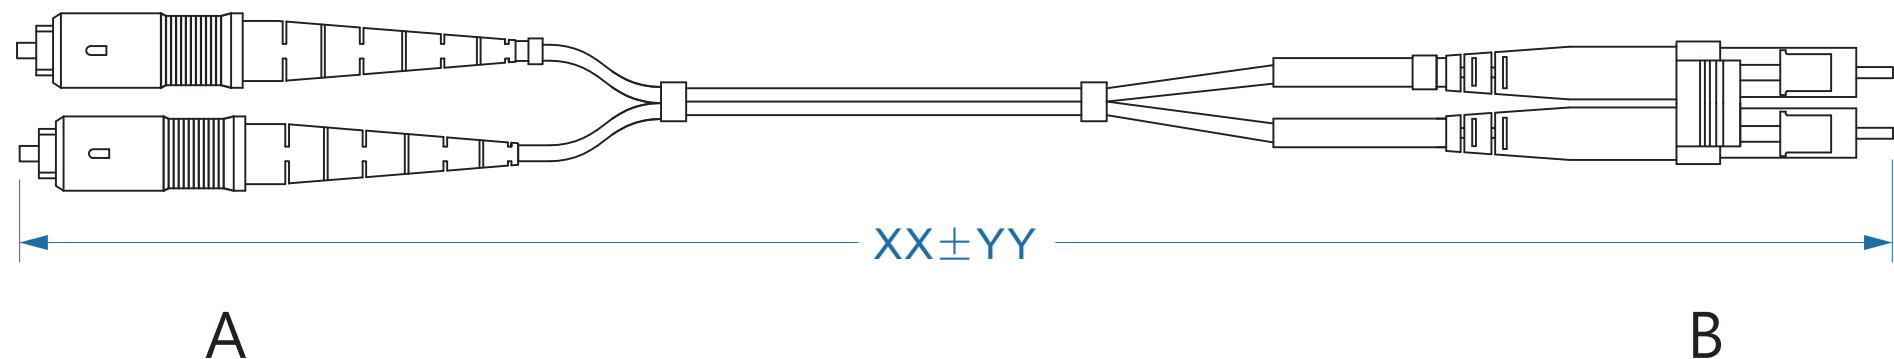

PART NO.	32-311-XX				
TITLE	LC/SC 50/125 Multimode Duplex Fiber Cables - OM2				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				