

6

5

4

3

2

1

F

E

D

C

B

A

F

E


D

C

B

A

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-13470	05/16/2024	AKRESOWSKI	REVANGELIS

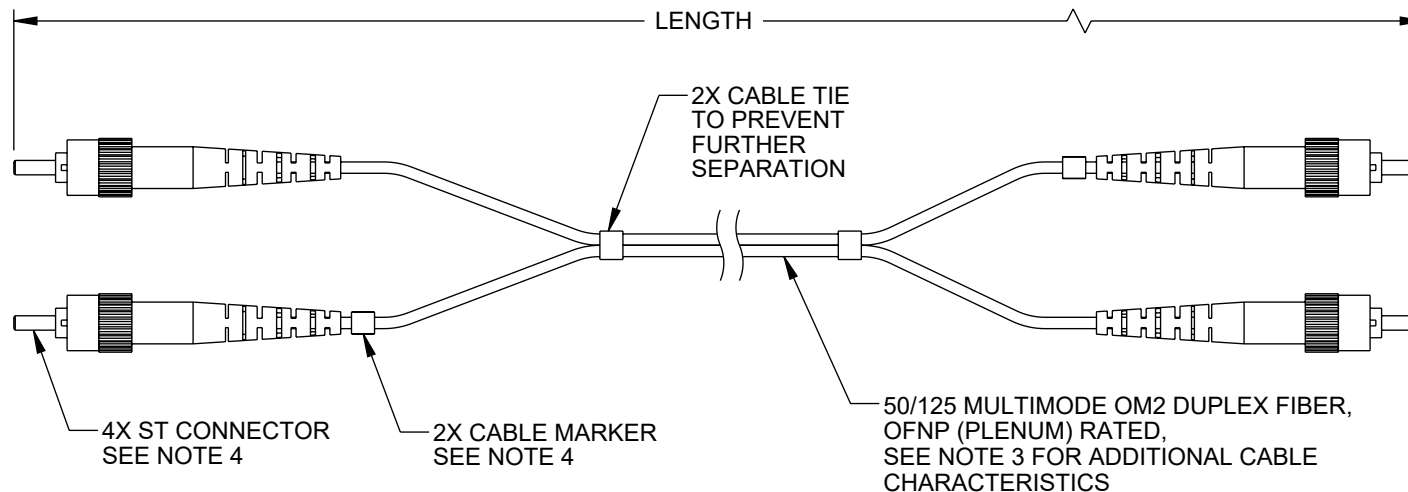

NOTES:


1. ST CONNECTOR POLISH TYPE: UPC
2. ALL CONNECTORS ACCOMPANIED WITH DUST CAPS INSTALLED (NOT SHOWN).
3. CABLE CHARACTERISTICS:
JACKET COLOR: ORANGE
INSERTION LOSS: ≤ 0.20 dB (PC/UPC)
RETURN LOSS: ≥ 35 dB
MAX ATTENUATION: 3.5/1.5 dB/KM
MIN BANDWIDTH: 200/500 MHz/KM
MIN BEND RADIUS: 4 CM (LOADED), 2 CM (UNLOADED)
OPERATING TEMPERATURE: -20 °C TO +70 °C
STORAGE TEMPERATURE: -40 °C TO +85 °C
STANDARDS: TIA/EIA-568B.3
BELLCORE GR-409
4. CONNECTOR BOOT COLOR AND CABLE MARKERS MAY VARY.
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ITEM NO.	LENGTH	
	METERS	FEET
33-329-01M	1	3.28
33-329-02M	2	6.56
33-329-03M	3	9.84
33-329-05M	5	16.40
33-329-10M	10	32.81
33-329-15M	15	49.21

LENGTH	TOLERANCE
≤ 1.0 METER	± 50 mm
> 1.0 METER	± 100 mm

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table><tr><td>X = ± 2 [5]</td><td>FRACTIONS ± 1/32</td></tr><tr><td>.XX = ± 0.02 [0.5]</td><td>ANGLES ± 1°</td></tr><tr><td>.XXX = ± 0.005 [0.13]</td><td></td></tr></table>		X = ± 2 [5]	FRACTIONS ± 1/32	.XX = ± 0.02 [0.5]	ANGLES ± 1°	.XXX = ± 0.005 [0.13]		Show Me™ CABLES an INFINIT® brand Website: www.ShowMeCables.com Phone: 1.888.519.9505		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
X = ± 2 [5]	FRACTIONS ± 1/32										
.XX = ± 0.02 [0.5]	ANGLES ± 1°										
.XXX = ± 0.005 [0.13]											
CABLE LENGTH TOLERANCES: <table><tr><td>≤12 [305] = +1 [25] / -0</td></tr><tr><td>>12 [305] ≤ 60 [1524] = +2 [51] / -0</td></tr><tr><td>>60 [1524] ≤ 120 [3048] = +4 [102] / -0</td></tr><tr><td>>120 [3048] ≤ 300 [7620] = +6 [152] / -0</td></tr><tr><td>>300 [7620] = +5% / -0</td></tr></table>		≤12 [305] = +1 [25] / -0	>12 [305] ≤ 60 [1524] = +2 [51] / -0	>60 [1524] ≤ 120 [3048] = +4 [102] / -0	>120 [3048] ≤ 300 [7620] = +6 [152] / -0	>300 [7620] = +5% / -0	<table><tr><td>SCALE</td><td>SHEET</td></tr><tr><td>NONE</td><td>1 OF 1</td></tr></table>	SCALE	SHEET	NONE	1 OF 1
≤12 [305] = +1 [25] / -0											
>12 [305] ≤ 60 [1524] = +2 [51] / -0											
>60 [1524] ≤ 120 [3048] = +4 [102] / -0											
>120 [3048] ≤ 300 [7620] = +6 [152] / -0											
>300 [7620] = +5% / -0											
SCALE	SHEET										
NONE	1 OF 1										
DESCRIPTION ST TO ST 50/125 MULTIMODE DUPLEX OM2 PLENUM RATED FIBER PATCH CABLE											
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV							
A	3SVT8	AKRESOWSKI	33-329	B							

6

5

4

3

2

1