


LC/LC 62.5/125 Multimode Duplex Fiber Patch Cables - OM1

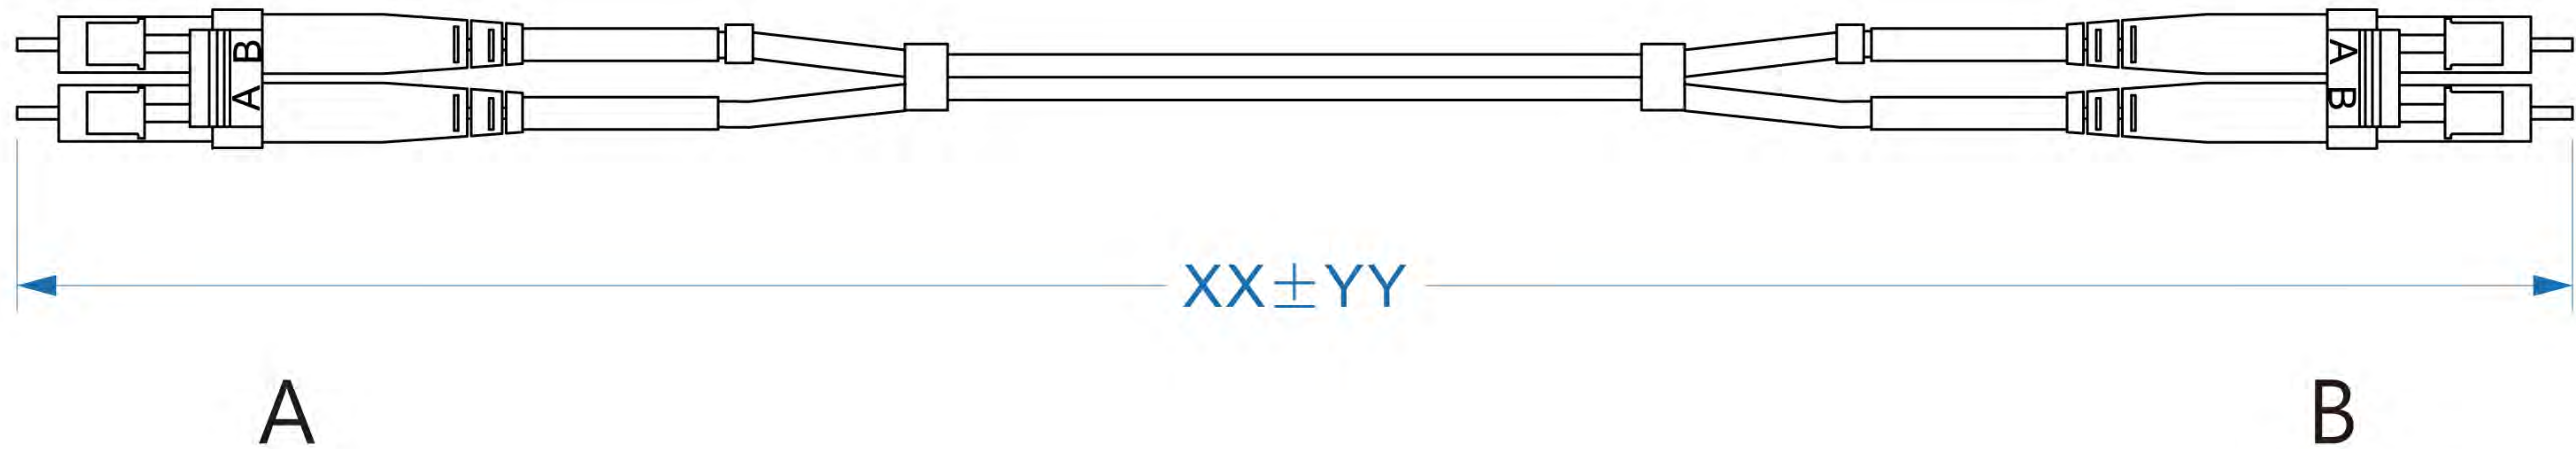

1. Connector A: LC/UPC MM
Connector B: LC/UPC MM
2. Cable Type: Duplex ϕ 2.0mm Multimode 62.5/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Orange
5. Insertion Loss(IL): $\leq 0.20\text{dB(PC/UPC)}$
Return Loss(RL): $\geq 35\text{dB(PC/UPC)}$
6. Maximum Attenuation: 3.5/1.5 dB/km (850/1300)
7. Min Bending Radius: 4cm (Loaded), 2cm (Unloaded)
8. Operating Temperature: -20 Centigrade to +70 Centigrade
9. Storage Temperature: -40 Centigrade to +85 Centigrade
10. Packing: Each cable packed in a zip-lock polybag
11. Standards: TIA/EIA-568B.3
BELLCORE GR-409
UL OFNR/FT4

XX	YY
XX \leq 1M	YY \pm 50MM
XX $>$ 1M	YY \pm 100MM

RoHS

PART NO.	34-507-XX				
TITLE	LC/LC 62.5/125 Multimode Duplex Fiber Cables - OM1				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				