


# MPO to LC 50/125 Multimode Breakout Fiber Patch Cables - 12Fiber - OM2



1. Connector A: MPO Female
- Connector B: LC/UPC
2. Cable Type: 12 Fiber OM2 Multimode 50/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Orange
5. Wavelength: 850/1300nm
6. MPO Connector: (IL)≤0.35dB ; (RL)≥20dB
7. LC Connector: (IL)≤0.20dB ; (RL)≥20dB
8. Attenuation at 850nm: ≤2.30 dB/km  
Attenuation at 1300nm: ≤0.60 dB/km
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag

| XX    | YY       |
|-------|----------|
| XX≤1M | YY±50MM  |
| XX>1M | YY±100MM |

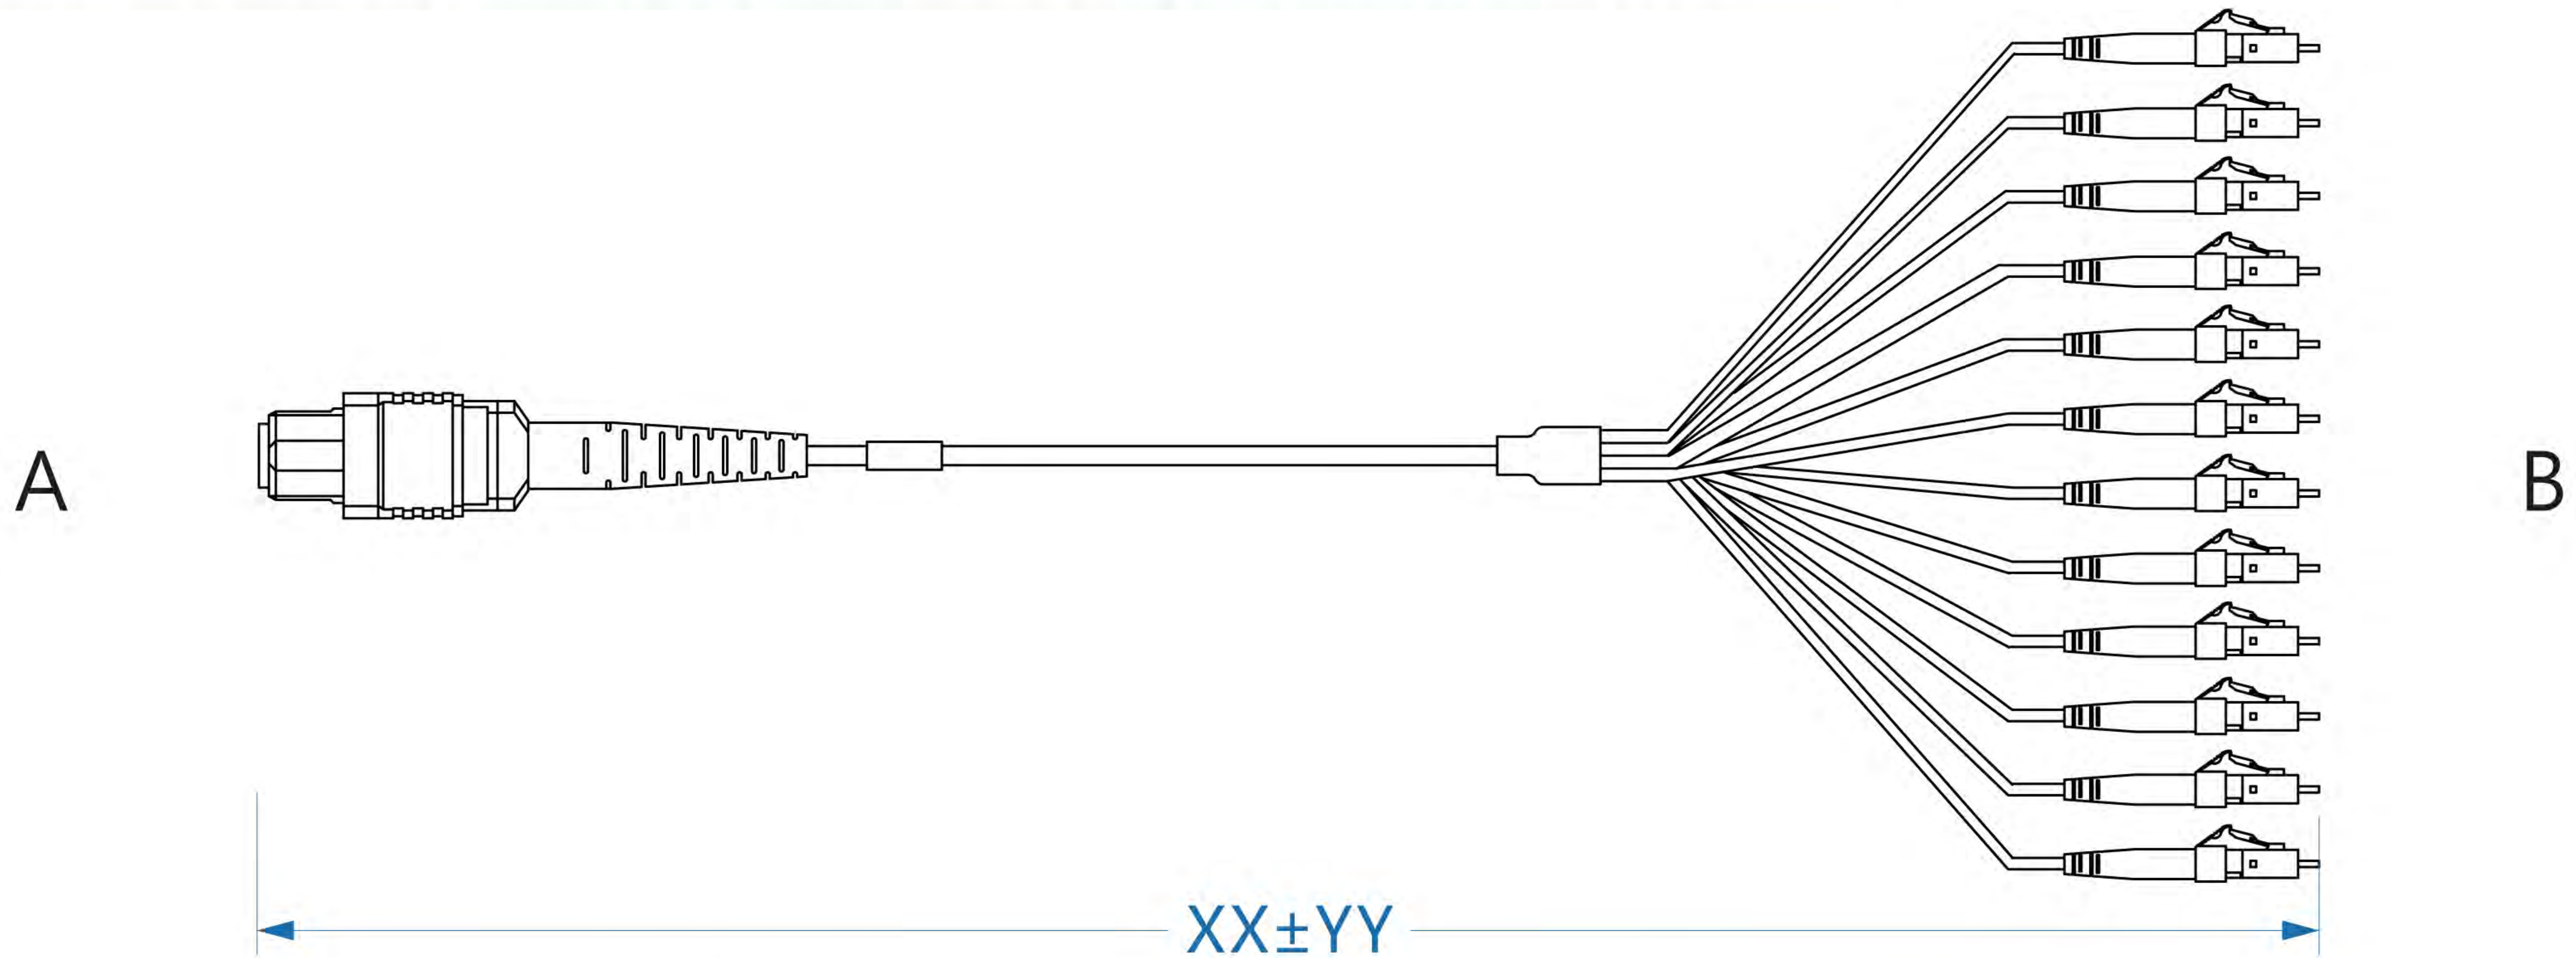

|          |  |      |       |  |  |
|----------|--|------|-------|--|--|
| PART NO. | 35-710-XX  |      |       |  |  |
| TITLE    | MPO to LC 50/125 Multimode Breakout Fiber Cables-12Fiber-OM2 |      |       |  |  |
| SCALE    | NOT SCALE  | REV. | A     |  |  |
| DRAWER   | LEO  | UNIT | Meter |  |  |
| CHECKED  | RAYMOND  |      |       |  |  |
| APPROVED | TOM  |      |       |  |  |