


MPO to LC 50/125 Multimode Breakout Fiber Patch Cables - 12Fiber - OM4

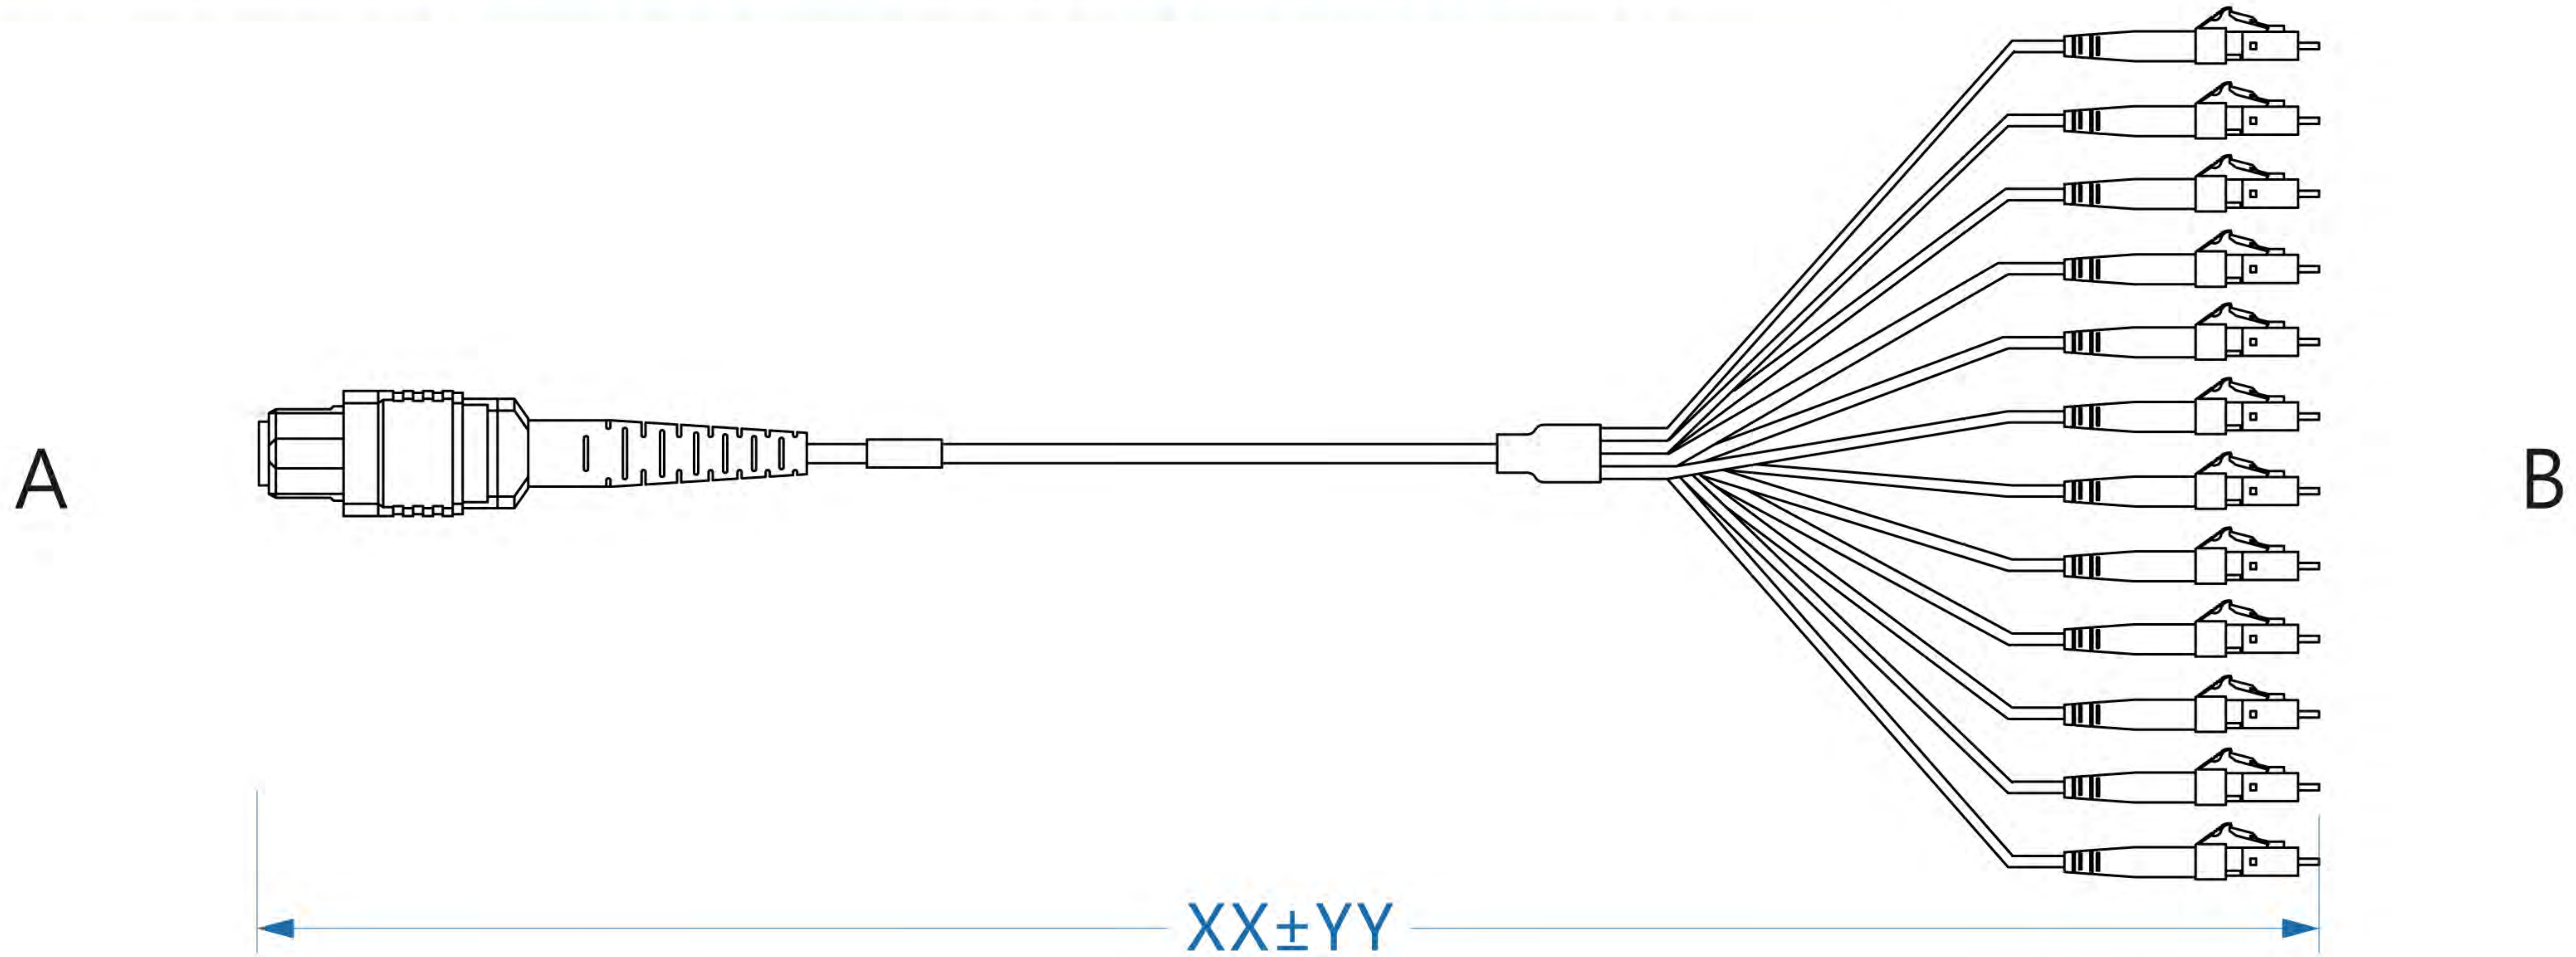

1. Connector A: MPO Female
- Connector B: LC/UPC
2. Cable Type: 12 Fiber OM4 Multimode 50/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Violet
5. Wavelength: 850/1300nm
6. MPO Connector: (IL)≤0.35dB ; (RL)≥20dB
7. LC Connector: (IL)≤0.20dB ; (RL)≥20dB
8. Attenuation at 850nm: ≤2.30 dB/km
Attenuation at 1300nm: ≤0.60 dB/km
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag

XX	YY
XX≤1M	YY±50MM
XX>1M	YY±100MM

RoHS

PART NO.	35-718-XX				
TITLE	MPO to LC 50/125 Multimode Breakout Fiber Cables-12Fiber-OM4				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				