

USB TYPE "B"
JACK
"J2"

NOTES:

MATERIAL:

COUPLER HOUSING: ABS, UL94V-0.
CONNECTOR INSULATORS: WHITE, PBT WITH GLASS FIBER.
TYPE "A" CONNECTOR CONTACTS: PHOSPHOR BRONZE.
TYPE "A" CONNECTOR SHELL: BRASS.
TYPE "B" CONNECTOR CONTACTS: PHOSPHOR BRONZE.
TYPE "B" CONNECTOR SHELL FRONT: BRASS.
TYPE "B" CONNECTOR SHELL BACK: STEEL.
PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING.

FINISH:

COUPLER HOUSING: CHROME.
CONNECTOR CONTACTS: GOLD, 30μ INCHES.
CONNECTOR SHELLS: NICKEL.

ELECTRICAL:

CURRENT RATING: 2 AMP MAX.
VOLTAGE RATING: 140 VDC.



ENVIRONMENTAL:

OPERATING TEMPERATURE: -20° C TO +80° C.

MISCELLANEOUS:

COUPLER SHALL BE TESTED FOR CONTINUITY.
COUPLER SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.

WIRING MAP

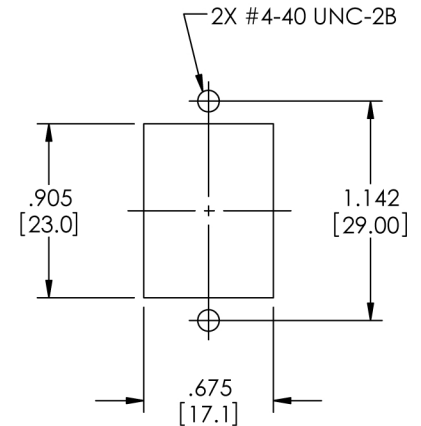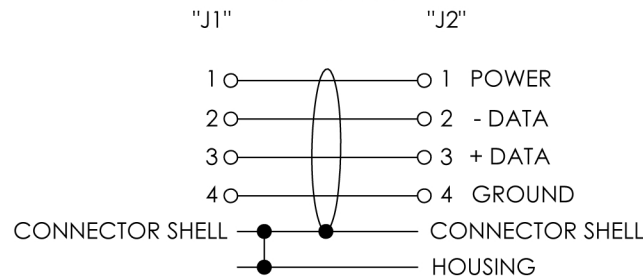

RECOMMENDED
PANEL CUTOUT

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	Show Me CABLES <small>cables & connectors since 1995</small>	
	DRAWN BY C. MCCORMICK	06/29/2001		
	CHECKED BY R. CARRICK	06/29/2001	CATEGORY	
	APPROVED BY Z. WORONKO	06/29/2001	USB	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
			USB A-B PANEL ADPT SHIELDED	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ECF504-UABS	REV. H
	SCALE: NONE	CAD FILE: ECF504-UABS.SLDDRW	SHEET 1 OF 1	