


# LC/LC 50/125 Multimode Duplex Fiber Patch Cables - OM3

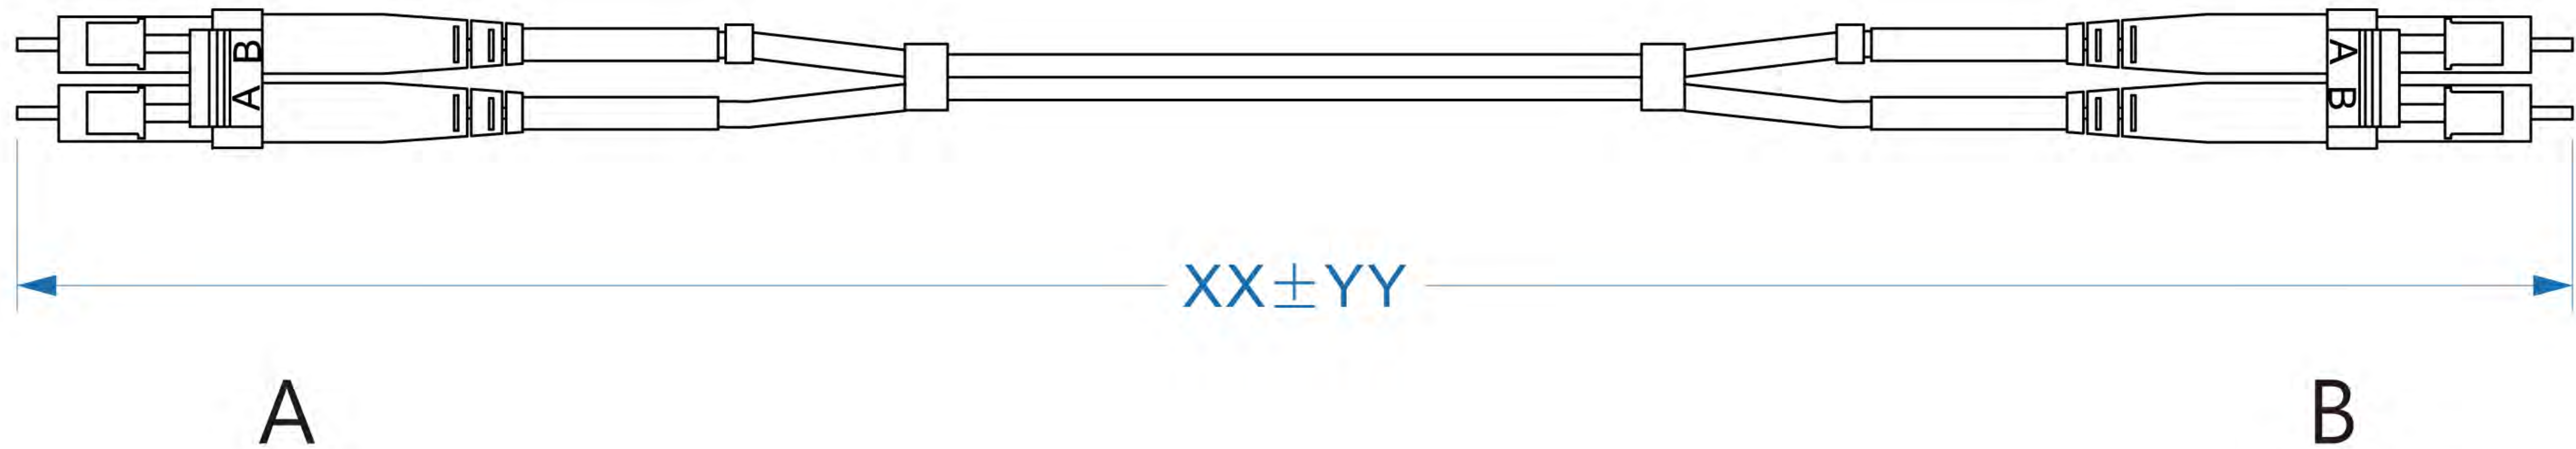

XX	YY
XX ≤ 1M	YY ± 50MM
XX > 1M	YY ± 100MM

1. Connector A: LC/UPC MM
- Connector B: LC/UPC MM
2. Cable Type: Duplex  $\phi$ 2.0mm OM3 Multimode 50/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Aqua
5. Insertion Loss(IL):  $\leq 0.20\text{dB(PC/UPC)}$
- Return Loss(RL):  $\geq 35\text{dB(PC/UPC)}$
6. Maximum Attenuation: 3.0/1.0 dB/km (850/1300)
7. Min Bending Radius: 4cm (Loaded), 2cm (Unloaded)
8. Operating Temperature: -20 Centigrade to +70 Centigrade
9. Storage Temperature: -40 Centigrade to +85 Centigrade
10. Packing: Each cable packed in a zip-lock polybag
11. Standards: TIA/EIA-568B.3  
BELLCORE GR-409  
UL OFNR/FT4

RoHS

PART NO.	36-100-XX				
TITLE	LC/LC 50/125 Multimode Duplex Fiber Cables - OM3				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				