



Conn.1 DVI(24+1) Male Molding

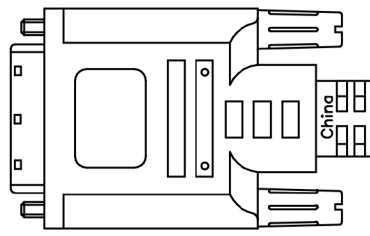

Conn.2 DVI(24+1) Male Molding

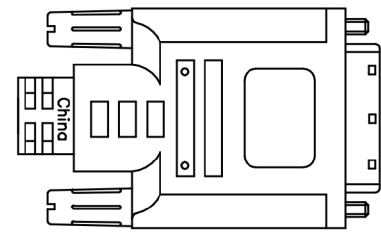

Electronic Test :

1. 100%Test (Open, Short, Miss Wire)
2. Contact Resistance : 2.0 ohm max
3. Insulation Resistance : 10M ohm min
4. Hi-Pot : 300V DC/10ms
5. Bending Test: Angle 90°, Bending 2~3 Times Up And Down.

⑨	R90-45006	Outer Mold:45P PVC Color:3U2X(Black)(RoHS Compliant)	28/1000	Kg
⑧	R87-01001	Ferrite Core RH17.5*9.5*28.5mm(RoHS Compliant)	2	Pcs
⑦	R87-06011	Copper TUBE OD:11.4*10.5 L=10mm(RoHS Compliant)	2	Pcs
⑥	R87-04002	Copper Foil W=0.7cm(RoHS Compliant)	8/100	m
⑤	R90-45044	Outer Mold:45P PVC Color:EC-005(White)(RoHS Compliant)	40/1000	Kg
④	R86-20119	Screw Can For DVI(4-40# EC-005)(RoHS Compliant)	2	Pcs
③	R85-02032	Metal Can∅10.5 For DVI Male Connector(RoHS Compliant)	2	Pcs
②	R79-25004	DVI(24+1)M Insulation:Black,Local(RoHS Compliant)	2	Pcs
①	61-19013	UL20276 [(28AWG*1P)*7C+28AWG*5C]+AL/MY+BD+Jacket OD:8.6±0.15mm Color:PMS 3U2X "eltop"(RoHS Compliant)	2	m
NO	P/N	DESCRIPTION	Q'TY	UNIT

		DESCRIPTION	RoHS Compliant		
		PART No.	40-100-02M		
DRAW		DWG. No.		REV.	A
CHECK		DATE		SCALE	NONE
APP.		SIZE	A4	UNIT	mm
				SHEET	1/2