

6

5



4

3


REVISION

1

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	ECO-15779	5/5/2026	DMAY	DGUST

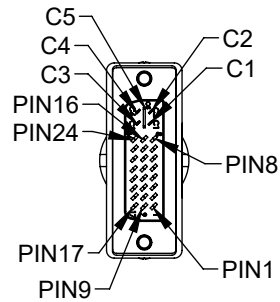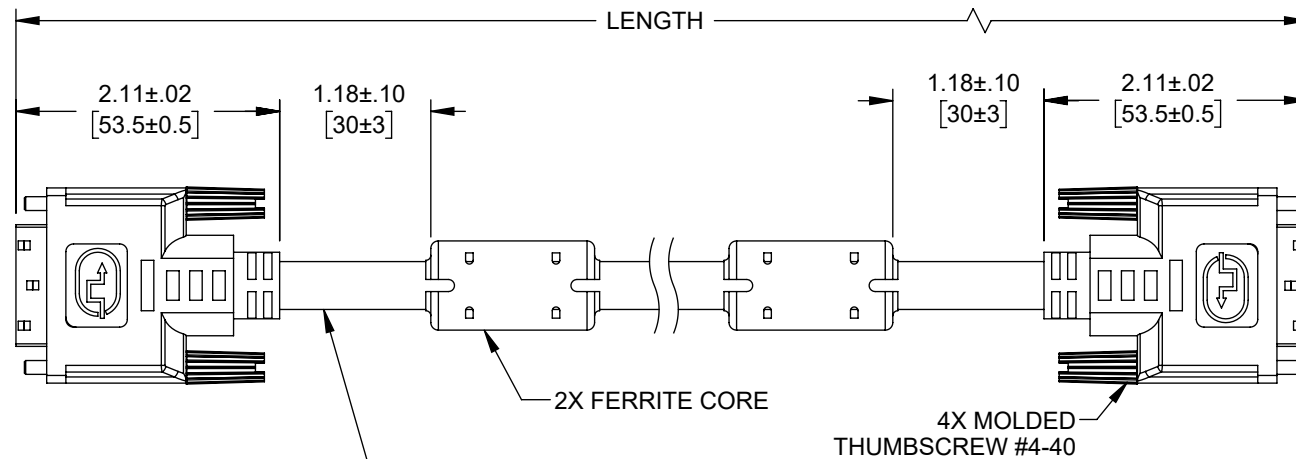


P1
DVI29 MALE,
GOLD PLATING CONTACTS
CONNECTOR

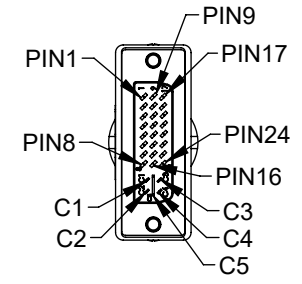

P2
DVI29 MALE,
GOLD PLATING CONTACTS
CONNECTOR

2X FERRITE CORE
4X MOLDED THUMBSCREW #4-40
CABLE DUAL LINK: UL20276 [3 MINI COAXIAL 30AWG
+(28AWG*1 PAIR+AL+D+MY)*7PCS+28AWG*1PAIR+28AWG*5C)
+AL+D AMA BRAID,
JACKET: BLACK, OD 9.5mm
MARKING: EXXXXXX AWM 20276 80°C 30V VW-1
CSA 204790 I/II A 80°C 30V FT1 MSL
DVI DIGITAL (DUAL LINK)/ ANALOG

WIRE MAP

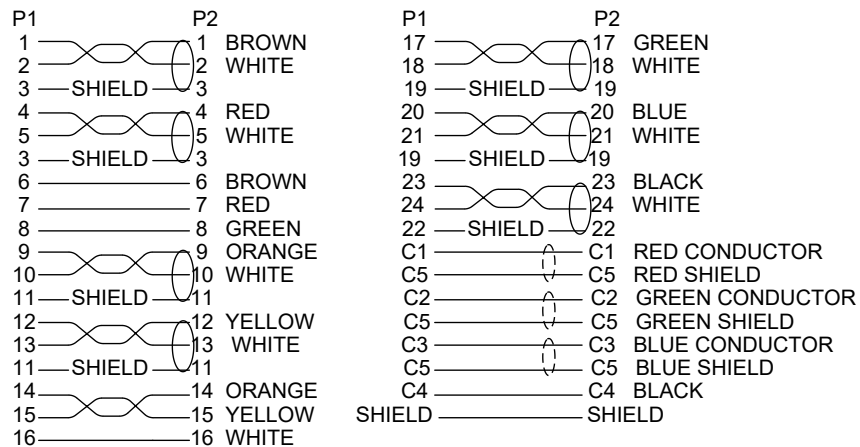

PART #	LENGTH
40-421-02M	2M
40-421-03M	3M
40-421-05M	5M

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
.X = ±.2 [5] FRACTIONS ± 1/32
.XX = ±.02 [0.5] ANGLES ± 1°
.XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® company

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
DVI-I MALE TO DVI-I MALE DUAL LINK CABLE				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	DMAY	40-421-XXX	A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1