



**NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD**



REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description

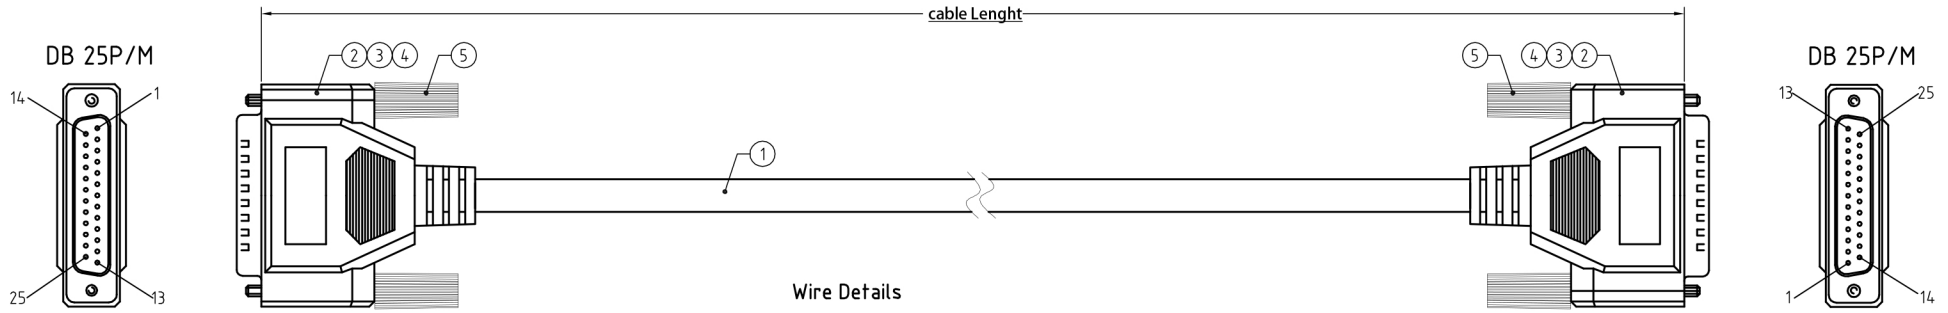

**Wire Details**

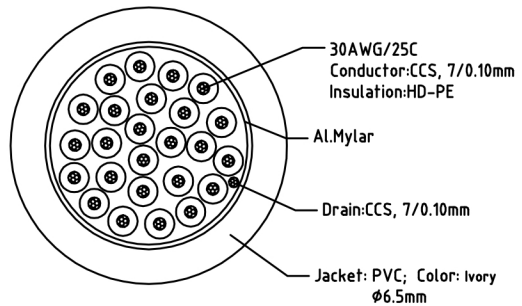

Label:  
Size: 1.97" x 0.79"



**Electrical character:**

- 1) 100% Open/short/Intermittent testing
- 2) Withstanding voltage: DC 300V AT 10ms.
- 3) Insulation resistance: 10M Ohm(min)
- 4) Conductive resistance: 5 Ohm(max)

**Length Tolerance**

6ft	(1830 +- 25)
10ft	(3550 +- 30)
15ft	(4575 +- 50)
25ft	(7625 +- 70)

**PIN ASSIGNMENT:**

DB 25P/M	DB 25P/M	DB 25P/M	DB 25P/M
1	1	16	16
2	2	17	17
3	3	18	18
4	4	19	19
5	5	20	20
6	6	21	21
7	7	22	22
8	8	23	23
9	9	24	24
10	10	25	25
11	11	Shell	Shell
12	12		
13	13		
14	14		
15	15		

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	Thumbscrew	#4-40UNC, $\phi 2.8 \times L 44.5\text{mm}$ , Nickel Plated, Molding PVC(Ivory)	4	PCS
④	Overmold	PVC, 45Pa, Ivory	N/A	G
③	Innermold	PE, Low density	N/A	G
②	DB_Conn	DB 25P/M, PIN G/F, Blue Insulation, Steel-Shell(Nickel Plated), Solder type	2	PCS
①	Cable	30#(7/0.10CCS) $\times$ 25C+D+A+PVC, Ivory, $\phi 6.5\text{mm}$	N/A	MM

## Show Me

### CABLES

an INFINIT® brand

DRAWN BY	DATE: 2014/11/20	DESCRIPTION: DB 25P M TO M Cable, 30#, 6FT
CHECKED BY	SHEET 1 of 1	Part No: 43-123-010
APPROVED BY	SCALE None	REV. 00
		UNIT: mm