




Wire Details

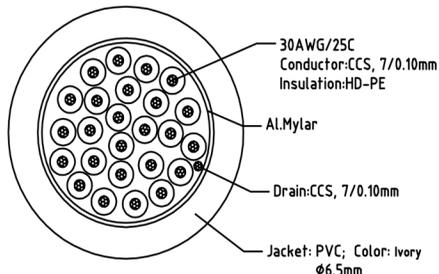

Label:
Size: 1.97" x 0.79"



Product Photo

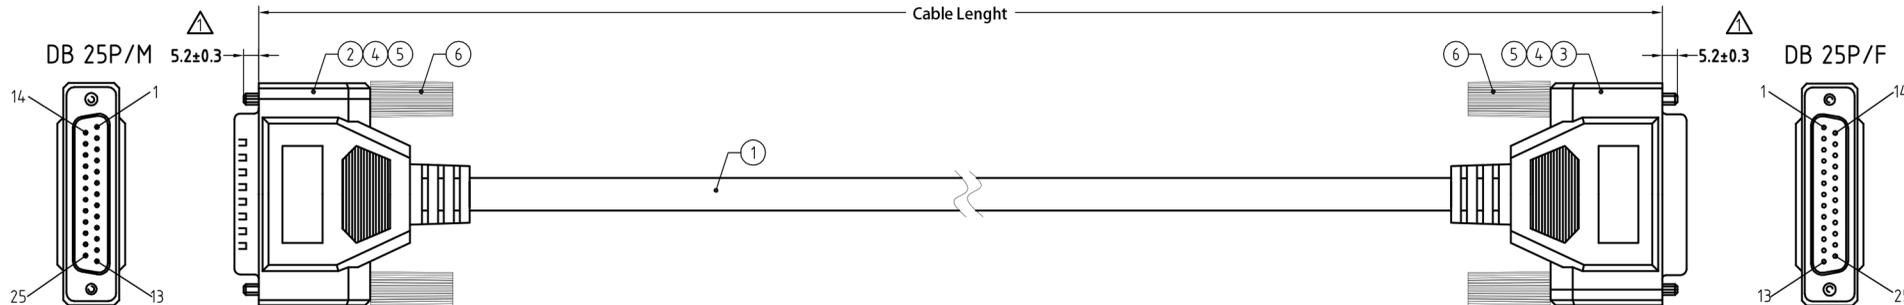

Electrical character:


- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Conductive resistance:20 Ohm(max)

Length Tolerance

6ft	(1830 +- 25)
10ft	(3550 +- 30)
15ft	(4575 +- 50)
25ft	(7625 +- 70)

PIN ASSIGNMENT:

DB 25P/M	DB 25P/F	DB 25P/M	DB 25P/F
1	1	16	16
2	2	17	17
3	3	18	18
4	4	19	19
5	5	20	20
6	6	21	21
7	7	22	22
8	8	23	23
9	9	24	24
10	10	25	25
11	11	Shell	Shell
12	12		
13	13		
14	14		
15	15		



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
④	Thumbscrew	#4-40UNC,Ø2.8xL44.5mm,Nickel Plated,Molding PVC(Ivory)	4	PCS
⑤	Overmold	PVC,45Pa,Ivory	N/A	G
⑥	Innermold	PE,Low density	N/A	G
③	DB_Conn	DB 25P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	1	PCS
②	DB_Conn	DB 25P/M,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	1	PCS
①	Cable	30#(7/0.10CCS)x25C+D+A+PVC,Ivory,Ø6.5mm	N/A	MM



www.showmecables.com
888-519-9505 | sales@showmecables.com

Title

DB25 Male to DB25 Female Extension
Serial Cable

Part Number

43-124-025

Notes

1. Unless otherwise specified all dimensions are nominal
2. All specifications are subject to change without notice at any time
3. Dimensions are in millimeters