

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-13364	04/04/2024	HBAKKE	DGUST

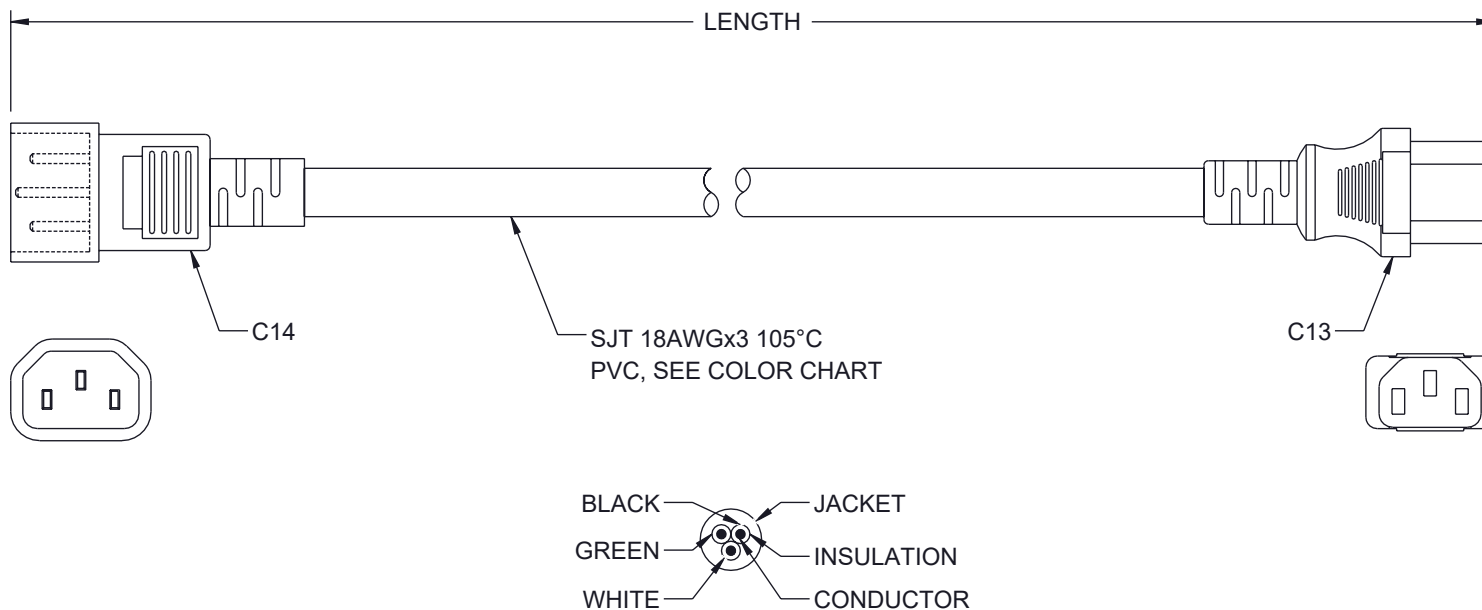

LENGTH FEET [METER]	BLACK	BLUE	WHITE	GREEN	RED
1.0 [.30]	44-100-001	44-100-001 BL	44-100-001 WH	44-100-001 GN	44-100-001 RD
2.0 [.61]	44-100-002	44-100-002 BL	44-100-002 WH	44-100-002 GN	44-100-002 RD
3.0 [.91]	44-100-003	44-100-003 BL	44-100-003 WH	44-100-003 GN	44-100-003 RD
6.0 [1.83]	44-100-006	44-100-006 BL	44-100-006 WH	44-100-006 GN	44-100-006 RD
8.0 [2.44]	44-100-008	44-100-008 BL	44-100-008 WH	44-100-008 GN	44-100-008 RD
12.0 [3.66]	44-100-012	-	-	-	-
15.0 [4.57]	-	44-100-015 BL	44-100-015 WH	44-100-015 GN	44-100-015 RD
25.0 [7.62]	44-100-025	-	-	-	-

NOTES:

- VOLTAGE RATING: AC $\geq$ 1500V/S
- CONNECTOR C13 POWER RATING: 10A UL-E257089
- CONNECTOR C14 POWER RATING: 10A UL-E257089
- CABLE: SJT 18AWGx3, 300V, 105°C VW-1 E313867 FT1
- CABLE ASSEMBLY RATED FOR 10A/250V.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ± 2 [5]
XX = ± 0.02 [0.5]
XXX = ± 0.005 [0.13]
FRACTIONS
 $\pm 1/32$
ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 ≤ 12 [305] = ± 1 [25] / -0
 >12 [305] ≤ 60 [1524] = ± 2 [51] / -0
 >60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
 >120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
 >300 [7620] = $\pm 5\%$ / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
CPU/PDU POWER CORD - C14 TO C13 - 10 AMP

SIZE A	CAGE CODE 3SVT8	DRAWN BY HBAKKE	ITEM NO. 44-100-XXX	REV B
-----------	--------------------	--------------------	------------------------	----------

6

5

4

3

2

1