

6

5

4

3

2

1

F

E

D

C

B

A

F

E


D

C

B

A

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-12904	10/19/2021	DMAY	GUTTADAURO

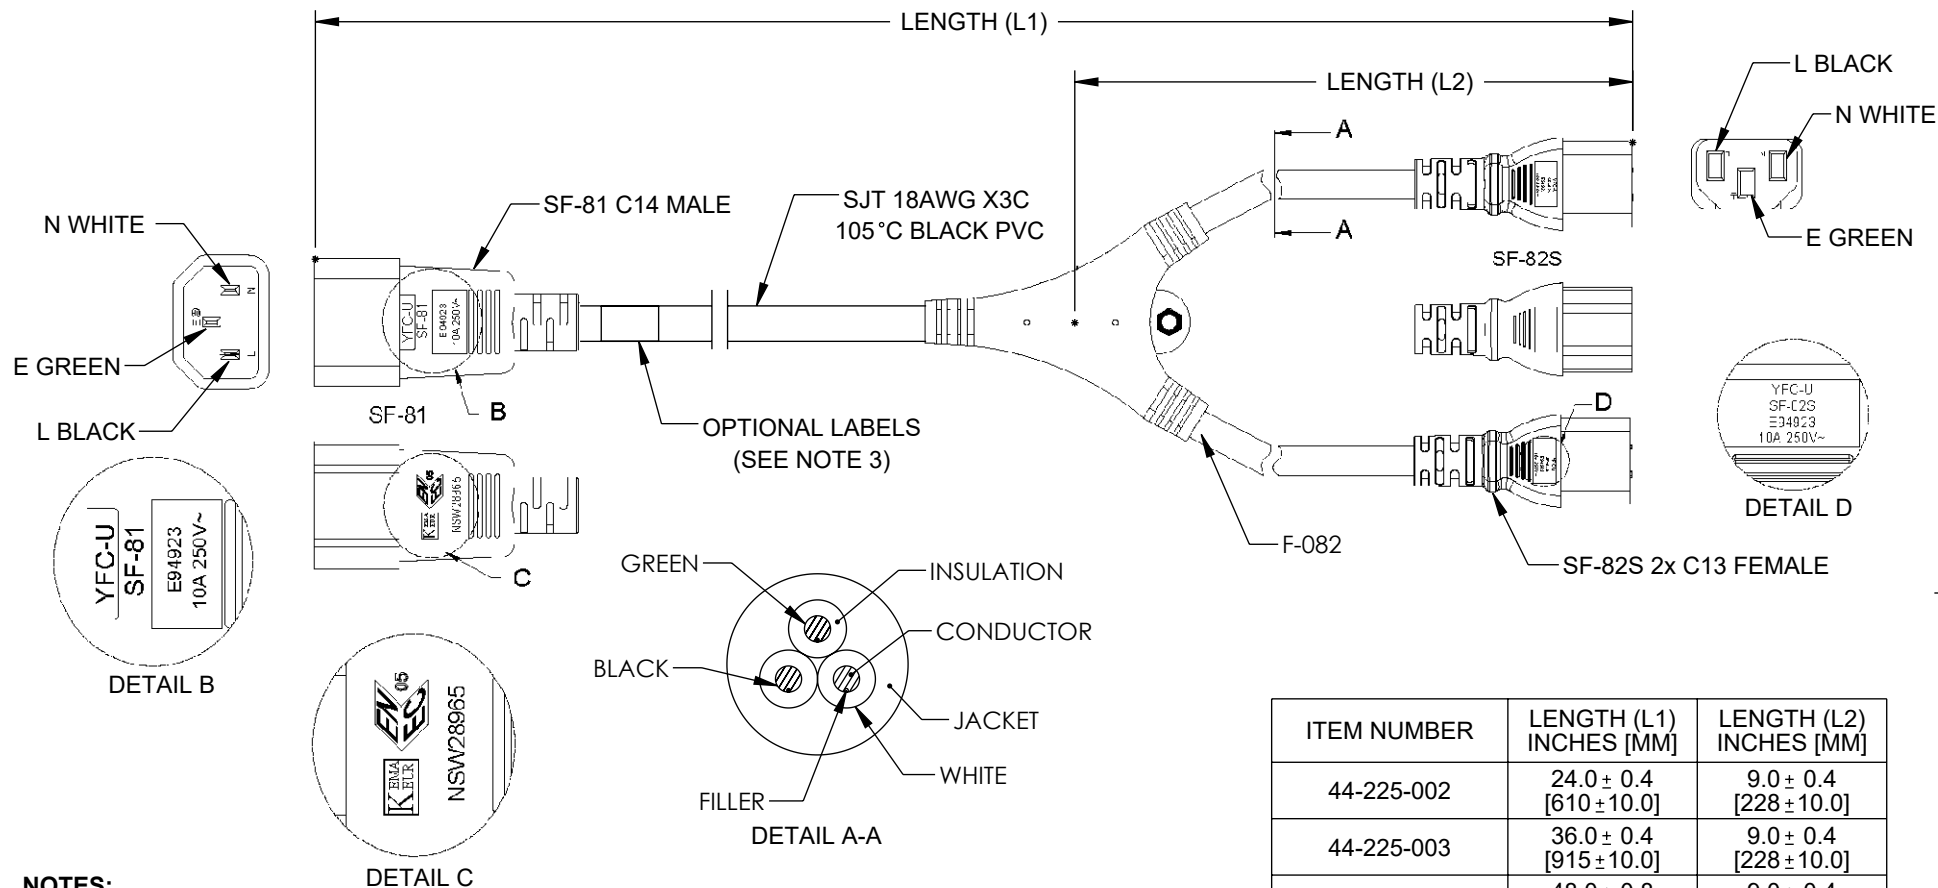

NOTES:

- VOLTAGE RATING:
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec
CONDUCTOR RESISTANCE $\leq 22.4\Omega/1000M$
VOLTAGE RATING AC 300V
- CABLE MARKING :
(UL) E135710-F5 SGT 3X18AWG 105°C 300V VW-1
c(UL) SGT 3X0.824mm2(18AWG) 105°C 300V FT2
- OPTIONAL LABELS:
OPTIONAL LABEL(S) MAY INCLUDE
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH SPEC. PS-0031.
- ALL DIMENSIONS FOR REFERENCE ONLY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ± 2 [5]	FRACTIONS $\pm 1/32$
.XX = ± 0.02 [0.5]	ANGLES $\pm 1^\circ$
.XXX = ± 0.005 [0.13]	
CABLE LENGTH TOLERANCES:	
≤ 12 [305] = ± 1 [25] / -0	
>12 [305] ≤ 60 [1524] = ± 2 [51] / -0	
>60 [1524] ≤ 120 [3048] = ± 4 [102] / -0	
>120 [3048] ≤ 300 [7620] = ± 6 [152] / -0	
>300 [7620] = $\pm 5\%$ / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY	

Show Me CABLES an INFINITO brand Website: www.ShowMeCables.com Phone: 1.888.519.9505		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE NONE	SHEET 1 OF 1
DESCRIPTION C14 - 2C13 SPLIT POWER CORD, 10A, 250V			
SIZE A	CAGE CODE 3SVT8	DRAWN BY MVEERAPPAN	ITEM NO. 44-225-XXX
			REV B