
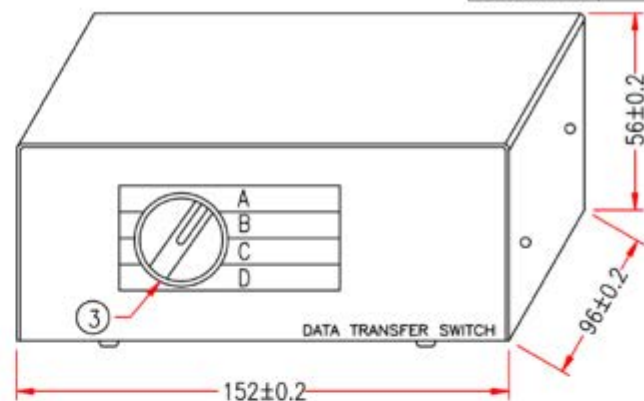


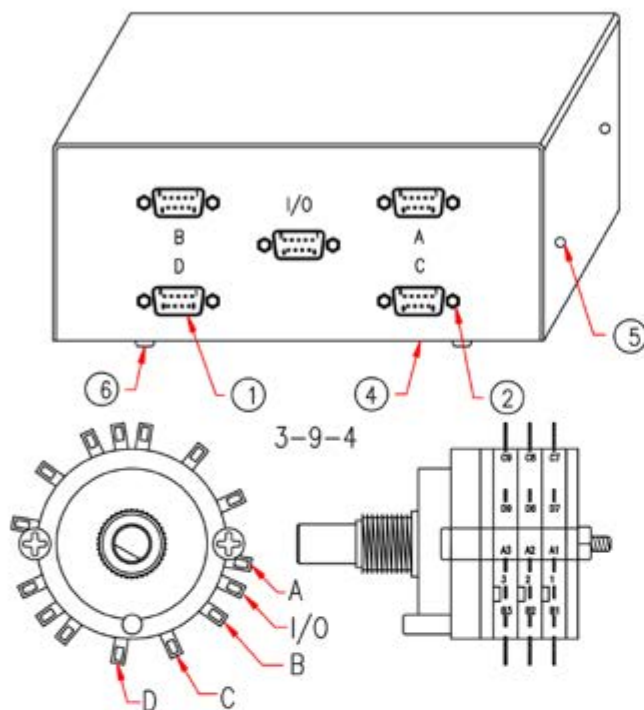

★ NOTE: All relevant materials are complied with RoHS directive .

6	PLASTO-VISCO-ELASTIC BODY	A4JA01-0562	4	M562
5	SCREW 3*6PWB	A6AE05-0805	4	M805
4	METAL CASE 152*92*58mm, THICKNESS 0.8mm	A6GA29-0315	1set	M315
3	JUMPER WIRE UL1061/26/19C x 26mm Ø1.0 WHITE LENGTH 150mm, DRAWING No.EH002601C-013	H5SE06-0304W01	49	M304
	MAIN HEART 3-9-4	A7BA05-0094	1	M94
	SCREW 4.75*12.3mm #4-40	A6AB12-0095	1set	M95
	KNOB FOR A, B, C, D, SWITCH	A4KA01-0267	1	M267
2	HEX-NUT 6.35*2.3mm #4-40	A6BD02-0095	10set	M95
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA03-0108	5	M108
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm	
CHECKED	HU			
DRAWING	ZHU			
DATE	30/AUG/18	ITEM NO.	47-200-021	UNIT:mm

6009		6009	
DB9 F (I/O)	SWITCH	DB9 F A&B&C&D	SHIELD
1	1	1	
2	2	2	
3	3	3	
4	4	4	
5	5	5	
6	6	6	
7	7	7	
8	8	8	
9	9	9	
SHIELD		SHIELD	