

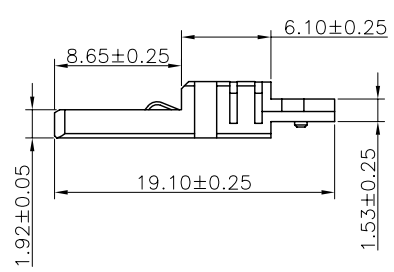

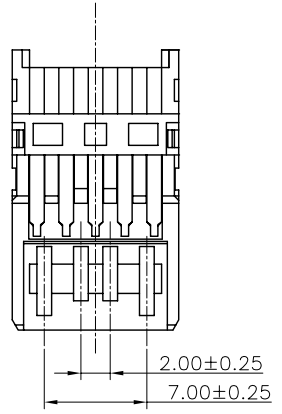

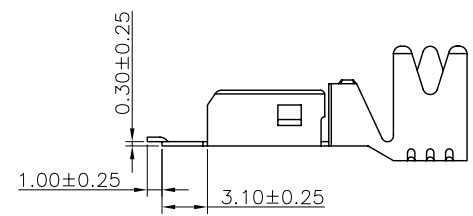
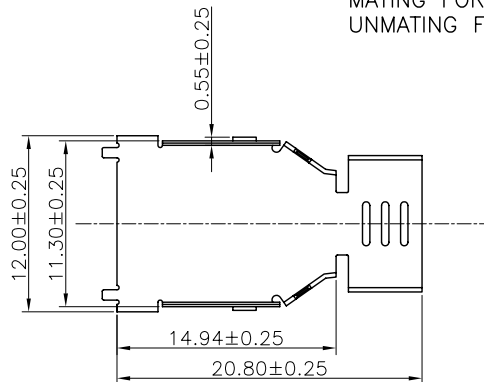




NOTE:
 MATERIAL:
 HOUSING:PBT+30% G.F. UL 94V-0
 CONTACT 5P:PHOSPHOR BRONZE
 CONTACT 4P:BRASS
 SHELL:SPCC
 PLATING:
 CONTACT: GOLD FLASH AND TIN OVER NICKEL PLATED
 SHELL: NICKEL PLATED OVER ALL
 SPECIFICATION:
 CURRENT RATING:1.0A AT 30V AC MIN
 WITHSTANDING VOLTAGE:500V AC FOR ONE MIN
 INSULATION RESISTANCT:1000MΩ MIN
 CONTACT RESISTANCE:30mΩ MAX
 MATING FORCE:3.57KgF MAX
 UNMATING FORCE:1.02KgF MIN

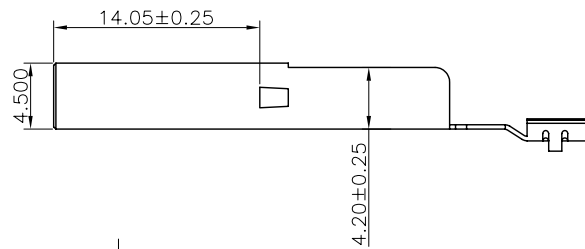

09/08/11	SYSTEM		NEW DWG		AO				
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech . LLC  						
						TITLE: USB 3.0 A/M SOLDER 15U"BLUE			
X.X	±0.38	X.X°	±3.00°	APPD:	PRODUCT NO: 1003-023-01300				
X.XX	±0.25	X.XX°	±1.00°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.13	X.XXX°	±0.500°	DRAW:	2009.08.11	1:1	mm	CD	1/1