

6

5

4

3


2

1

WIRING MAP

P1

P2




1 WHITE/ORANGE
2 ORANGE
3 WHITE/GREEN
6 GREEN
5 WHITE/BLUE
4 BLUE
7 WHITE/BROWN
8 BROWN

SHIELD


SHIELD

LENGTH±TOL.




8

1

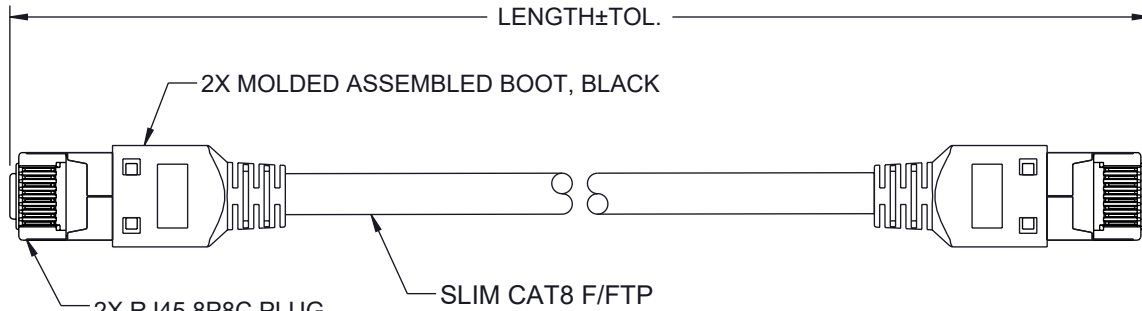

2X RJ45 8P8C PLUG
SHIELDED CONNECTOR

SLIM CAT8 F/FTP
4TP INDIVIDUALLY SHIELDED 28AWG SOLID BARE COPPER
JACKET: PVC, NOM DIA: .19" [4.9], COLOR: BLUE



8

P2

NOTES:

PHYSICAL:

- CONDUCTOR TYPE: 28AWG, SOLID BC
- INSULATION: HDPE
- CONDUCTOR DIA: 0.85±0.05mm
- CONNECTOR CONTACT MATERIAL: COPPER ALLOY, 50µ" GOLD PLATED
- MINIMUM AVERAGE CABLE THICKNESS: .024 [0.60].

ELECTRICAL:

- BANDWIDTH: 2000 MHz
- VOLTAGE RATING: 30 V
- CONDUCTOR DC RESISTANCE: 24.2Ω/100m (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100m
- PROPAGATION DELAY: 545ns/100m (MAXIMUM)
- DELAY SKEW: 45ns/100m (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST

ENVIRONMENTAL:

- INSTALLATION TEMPERATURE RATING: 0°C TO +50°C
- OPERATING TEMPERATURE RATING: -20°C TO +60°C

MISCELLANEOUS:

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/03/2024	DZINN	GUTTADAURO

ITEM NUMBER	LENGTH [TOL.]	
	FEET [IN]	METERS [mm]
828TR-BLU-1F	1.00 [+1.38/- .59]	0.30 [+35/-15]
828TR-BLU-2F	2.00 [+1.38/- .59]	0.61 [+35/-15]
828TR-BLU-3F	3.00 [+1.38/- .59]	0.91 [+35/-15]
828TR-BLU-5F	5.00 [+1.38/- .79]	1.52 [+35/-20]
828TR-BLU-7F	7.00 [+1.38/-1.18]	2.13 [+35/-30]
828TR-BLU-10F	10.00 [+1.38/-1.18]	3.05 [+35/-30]
828TR-BLU-15F	15.00 [+1.38/-1.18]	4.57 [+35/-30]
828TR-BLU-25F	25.00 [±2.36]	7.62 [±60]

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	
CABLE LENGTH TOLERANCES:	
≤12 [305] = +1 [25] / -0	
>12 [305] ≤ 60 [1524] = +2 [51] / -0	
>60 [1524] ≤ 120 [3048] = +4 [102] / -0	
>120 [3048] ≤ 300 [7620] = +6 [152] / -0	
>300 [7620] = +5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED (NON-CRITICAL) FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY	

Show Me CABLES an INFINIT® brand		Website: www.ShowMeCables.com Phone: 1.888.519.9505		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
DESCRIPTION		Cat8 CA, F/FTP 28AWG, SB CONN, PVC , BLU		SCALE NONE	SHEET 1 OF 1
SIZE A	CAGE CODE 3SVT8	DRAWN BY DZINN	ITEM NO. 828TR-BLU	REV A	