


Show Me CABLES

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

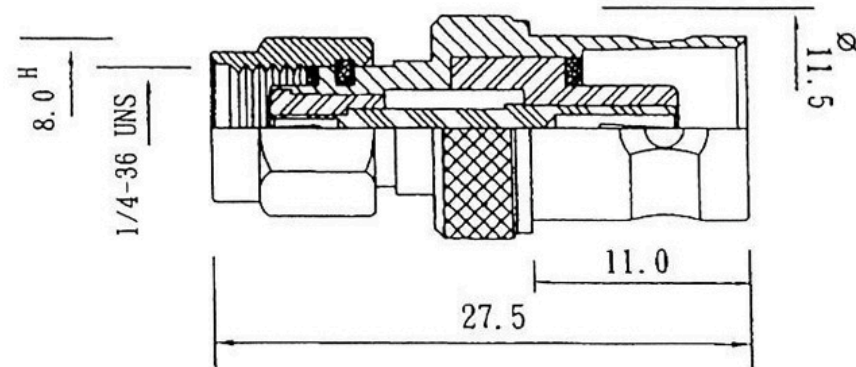

Impedance	50Ω
Frequency range	0 to 18 GHz
Voltage rating	RG-55, 58, 141, 142, 223, 303: 500 volts peak RG-122, 174, 188, 316, 375: 375 volts peak
VSWR (straight connectors)	RG-55 group: 1.15+0.011(GHz) RG-178 group: 1.20+0.251(GHz)
Contact resistance	Center: 2.0 milliohms Body: 2.0 milliohms Braid to body: 0.5 milliohms
Insulation resistance	5000 megohms
Insertion loss	0.03√f(GHz) dB max *

SMA PLUG(R/P)-BNC JACK

BY	DATE	PART NO	
DRAWN			
CHK'D			
APPRV			
MATERIAL	SEE NOTES	SHEET 1 OF 1	
FINISH	SEE NOTES		
UNITS		mm	
SCALE		NONE	

4	Shell	Brass	Nickel
3	Insulator	Teflon	White
2	Contact	PH/Bronze	Gold
1	Body	Brass	Nickel
NO	Description	Material	Finish