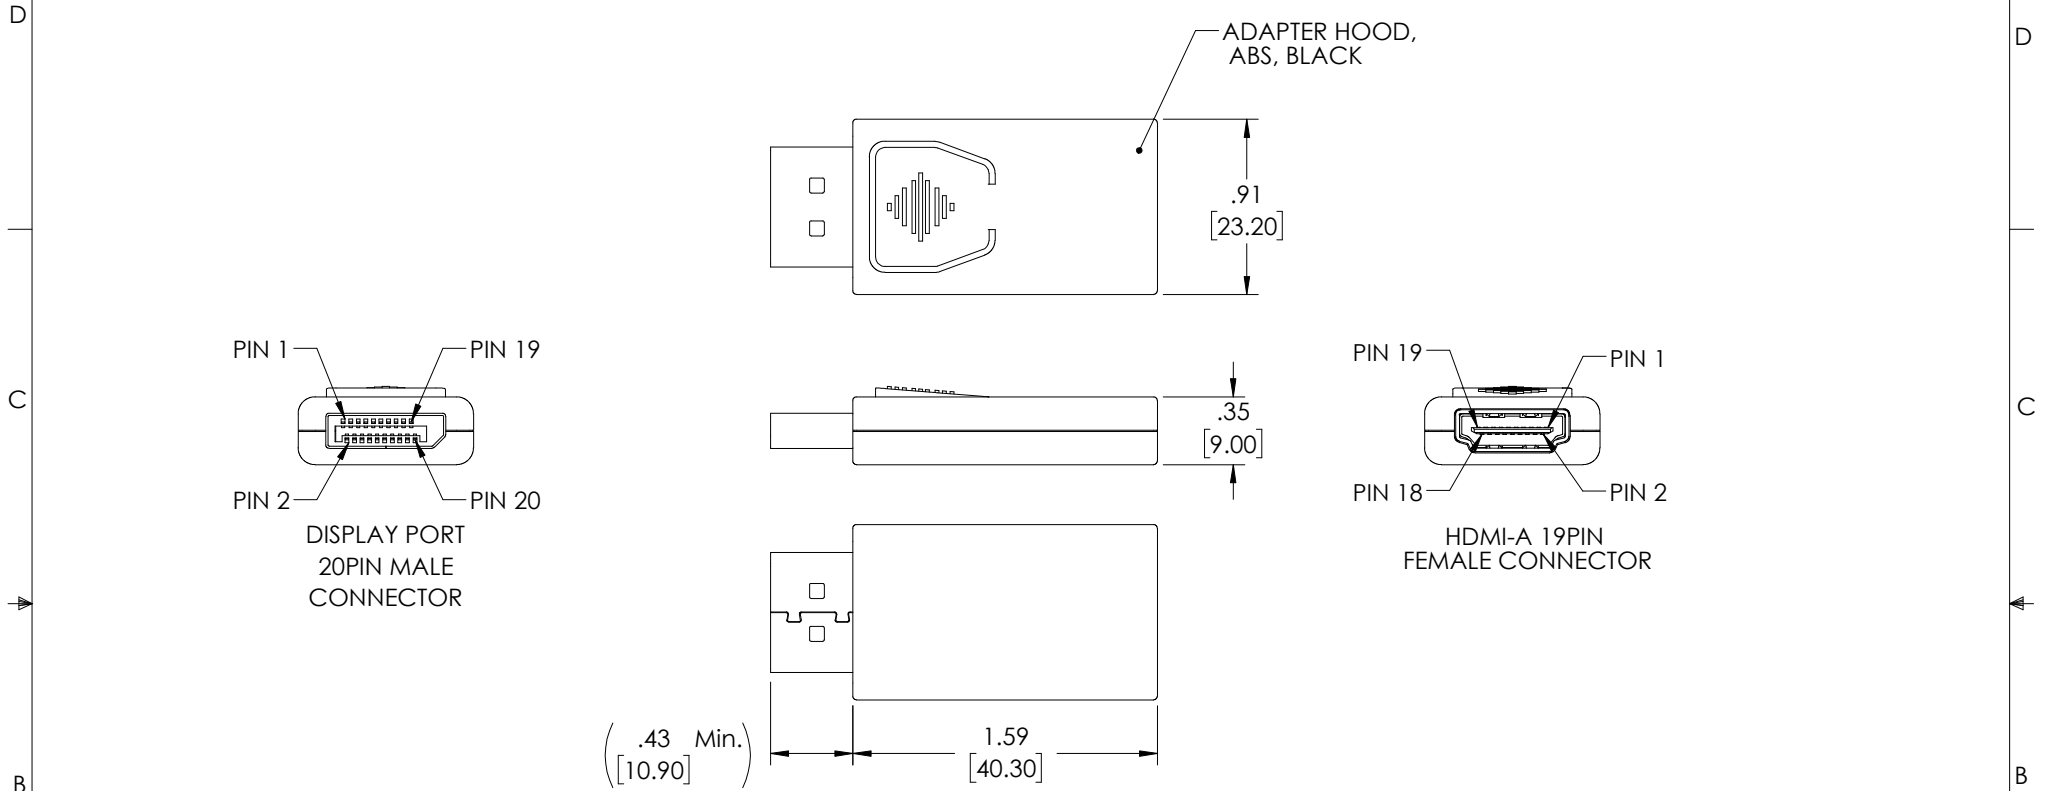


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/26/2022	DGUTTADAURO





**NOTE**

- VOLTAGE RATING:40VAC; CURRENT RATING: 0.5A  
OPERATING TEMPERATURE RANGE: -20°C ~+70°C
- ALL CONNECTORS HAVE NICKEL PLATED SHELLS AND GOLD PLATED CONTACTS.
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- ADAPTOR SHALL BE 1080P@60Hz FUNCTIONAL TESTED PRIOR TO SHIPPING.
- ADAPTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
- DUST COVERS OF DP MALE END INSTALLED FOR SHIPPING (NOT SHOWN).

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS DRAWN BY BZHANG CHECKED BY KGU APPROVED BY DGUTTADAURO	DATE 05/24/2022 05/24/2022 05/24/2022	 an INFINIT® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	THIRD-ANGLE PROJECTION 		CATEGORY AUDIO/VIDEO
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION DP M TO HDMI-A F ADAPTER	SCALE: NONE CAD FILE: DPHDAD.SLDDRW SHEET 1 OF 1
SIZE <b>A</b> CAGE CODE <b>43321</b> DWG. NO. <b>DPHAD</b>		REV. <b>A</b>	