

6

5

4

3

2

1

F

E


D

C

B

A


| REVISION | | | | | |
|----------|-----|-----------------|------------|------------|------------|
| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
| | A | INITIAL RELEASE | 07/22/2024 | KGLEBOVA | NOTTINGHAM |

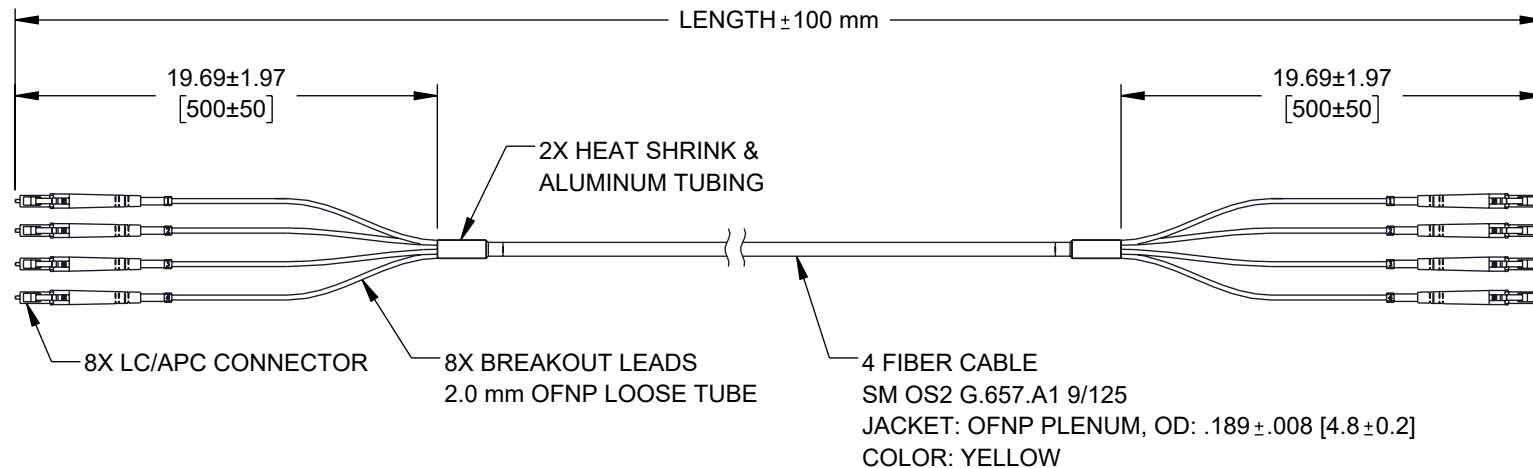

| CABLE SPECIFICATIONS | |
|---|-----------------------------------|
| ITEM | SPECIFICATION |
| CLADDING DIAMETER | 125 μ m |
| TIGHT BUFFER DIAMETER | .033 \pm .002 [0.85 \pm 0.05] |
| TIGHT BUFFER MATERIAL | PVC |
| MIN. BEND RADIUS (D: CABLE DIAMETER) | 7.5D mm STATIC 15D mm DYNAMIC |
| SHORT-TERM TENSILE | 320 N |
| LONG-TERM TENSILE | 160 N |
| SHORT-TERM CRUSH RESISTANCE | 1000 N/100 mm |
| LONG-TERM CRUSH RESISTANCE | 300 N/100 mm |
| STRENGTH MEMBER | ARAMID YARN |

| OPTICAL SPECIFICATIONS | |
|------------------------|---------------|
| FIBER TYPE | SINGLE MODE |
| INSERTION LOSS | ≤ 0.3 dB |
| RETURN LOSS | ≥ 60 dB |

| ITEM NUMBER | LENGTH | |
|------------------|--------|-------|
| | METERS | FEET |
| FCA-4S2LALAP2-05 | 5.0 | 16.40 |
| FCA-4S2LALAP2-10 | 10.0 | 32.81 |
| FCA-4S2LALAP2-15 | 15.0 | 49.21 |

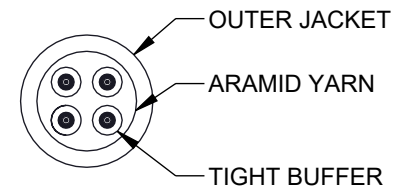

NOTES:

- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED AND LABELED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ± 2 [5]
XX = ± 0.02 [0.5]
XXX = ± 0.005 [0.13]
FRACTIONS
 $\pm 1/32$
ANGLES $\pm 1^\circ$

CABLE LENGTH TOLERANCES:
 ≤ 12 [305] = ± 1 [25] / -0
 >12 [305] ≤ 60 [1524] = ± 2 [51] / -0
 >60 [1524] ≤ 120 [3048] = ± 4 [102] / -0
 >120 [3048] ≤ 300 [7620] = ± 6 [152] / -0
 >300 [7620] = $\pm 5\%$ / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINITE brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE
NONE

SHEET
1 OF 1

DESCRIPTION
FIBER DIST CABLE, 4 STRAND LC/APC-LC/APC OS2, 4.8MM
PLENUM JKT, 2.0MM BREAKOUT AT .5M

| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
|------|-----------|----------|---------------|-----|
| A | 3SVT8 | KGLEBOVA | FCA-4S2LALAP2 | A |

6

5

4

3

2

1