


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-13347	01/03/2024	DZINN	REVANGELIS

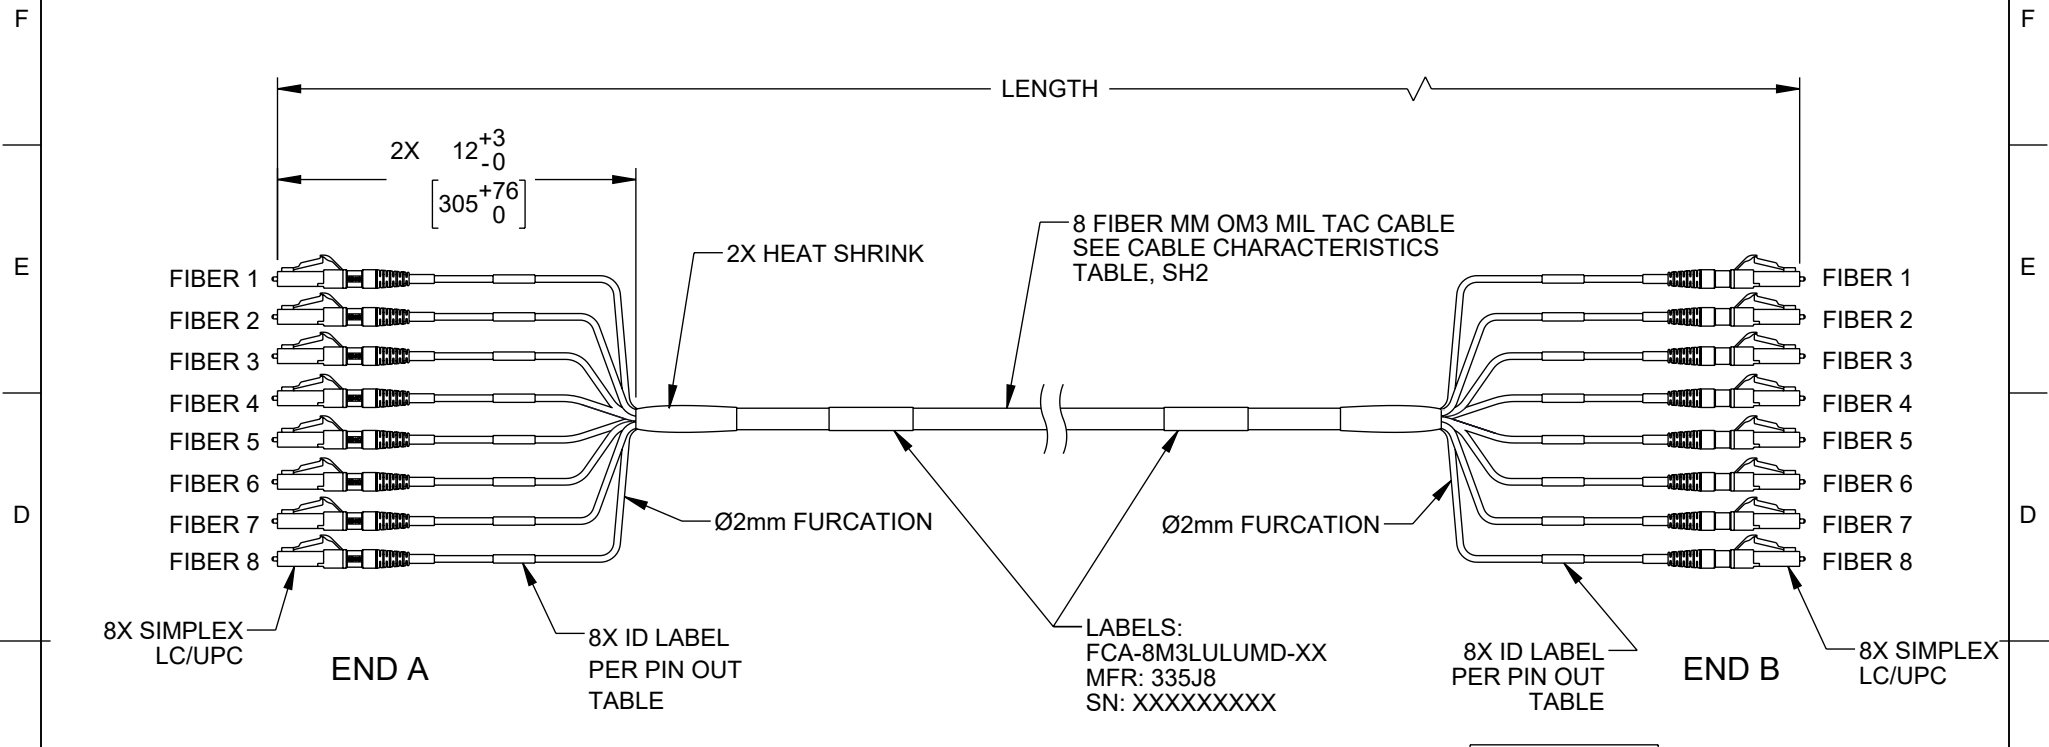

ITEM NUMBER	LENGTH	
	METERS	FEET
FCA-8M3LULUMD-10	10	32.81
FCA-8M3LULUMD-15	15	49.21
FCA-8M3LULUMD-20	20	65.62

LENGTH (L)	LENGTH TOLERANCE
L ≤ 6M [19.69 FT]	+0.15 M [.49 FT] / -0
L > 6M [19.69 FT] & ≤ 30M [98.43 FT]	+0.3 M [.98 FT] / -0
L > 30M [98.43 FT]	+1 M [3.28 FT] / -0

PIN OUT	
END A	END B
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

- NOTES:**
- LC CONNECTOR ASSEMBLY POLISH TYPE: UPC
 - CONNECTORS ARE SUPPLIED WITH DUST CAPS INSTALLED, NOT SHOWN.
 - FABRICATED, INSPECTED, AND TESTED IAW IPC-A-640, CLASS 3.
 - CABLE ASSEMBLY SHALL BE HAND COILED AND INDIVIDUALLY PACKAGED AND LABELED.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

Show Me
CABLES

an INFINIT® brand

Website: www.ShowMeCables.com
 Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 2	
DESCRIPTION DEPLOYABLE MIL TACTICAL CABLE ASSY, MM, OM3, LC UPC 8X TO LC UPC 8X	
SIZE	REV
A	B
CAGE CODE	ITEM NO.
3SVT8	FCA-8M3LULUMD
DRAWN BY	
DZINN	