



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	INITIAL RELEASE	03/06/2023	HBAKKE PHOSODAR



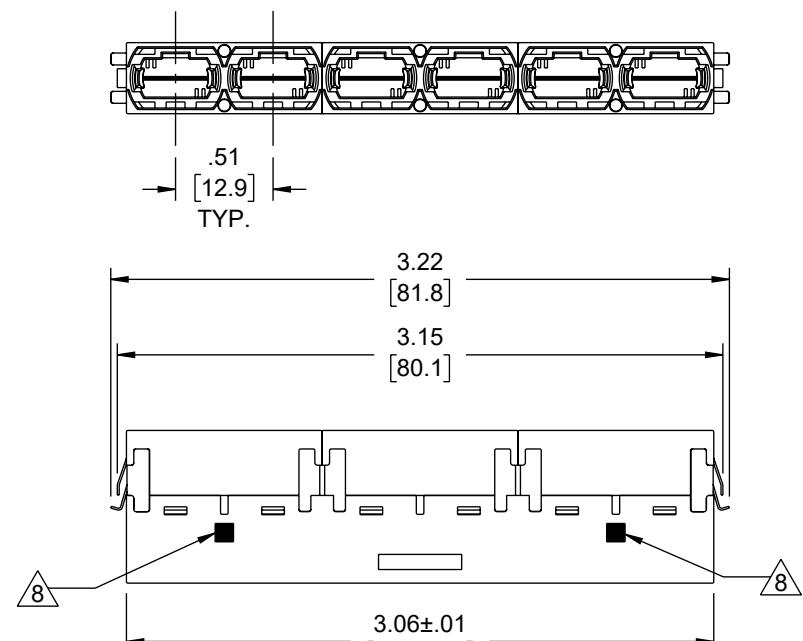


NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DUST CAPS NOT SHOWN.
3. RECOMMENDED PANEL THICKNESS: .05-.07" [1.2-1.7mm]
4. STANDARDS: IEC 61754-7-MPO, TIA/EIA 604-5 TYPE MPO, TELCORDIA GR-1435-CORE
5. INSERTION LOSS: <0.5dB
6. OPERATING/STORAGE TEMPERATURE: -40 TO +85°C
7. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
8. WHITE MARK FOR KEY UP-KEY DOWN.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

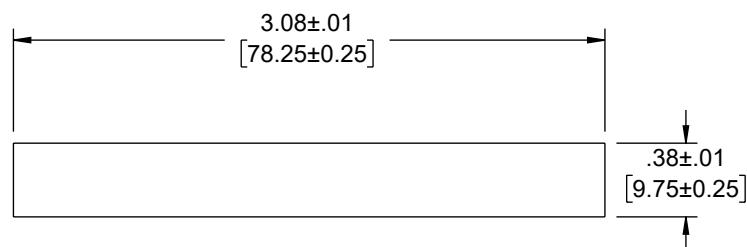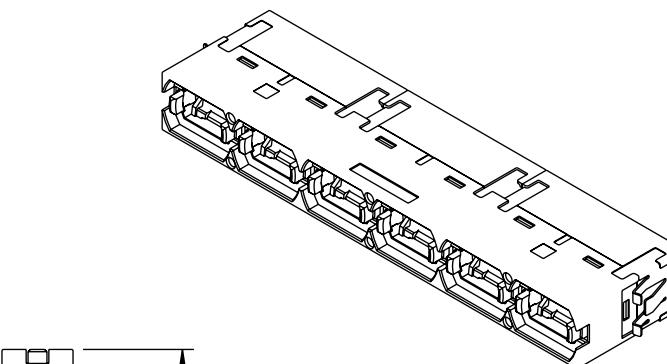


RECOMMENDED
PANEL CUTOUT

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
 ≤ 12 [305] = +1 [25] / -0
 > 12 [305] ≤ 60 [1524] = +2 [51] / -0
 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0
 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0
 > 300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
 $.X = \pm .2$ [5] FRACTIONS
 $.XX = \pm .02$ [5] $\pm 1/32$
 $.XXX = \pm .005$ [1.3] ANGLES $\pm 1^\circ$



APPROVALS	DATE
DRAWN BY HBAKKE	03/06/2023
CHECKED BY DMAY	03/06/2023
APPROVED BY REVANGELIS	03/06/2023

CATEGORY



50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

FIBER OPTICS

PRODUCT DESCRIPTION			
SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	FOA-860-GRN	A
SCALE: NONE	CAD FILE: FOA-860-GRN.SLDDRW		SHEET 1 OF 1