


# Preterminated 66 Wiring Block w/12 RJ-45 Jacks 8P8C

## PRODUCT SPECIFICATION

### Package includes:

- A. 8P8C Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc

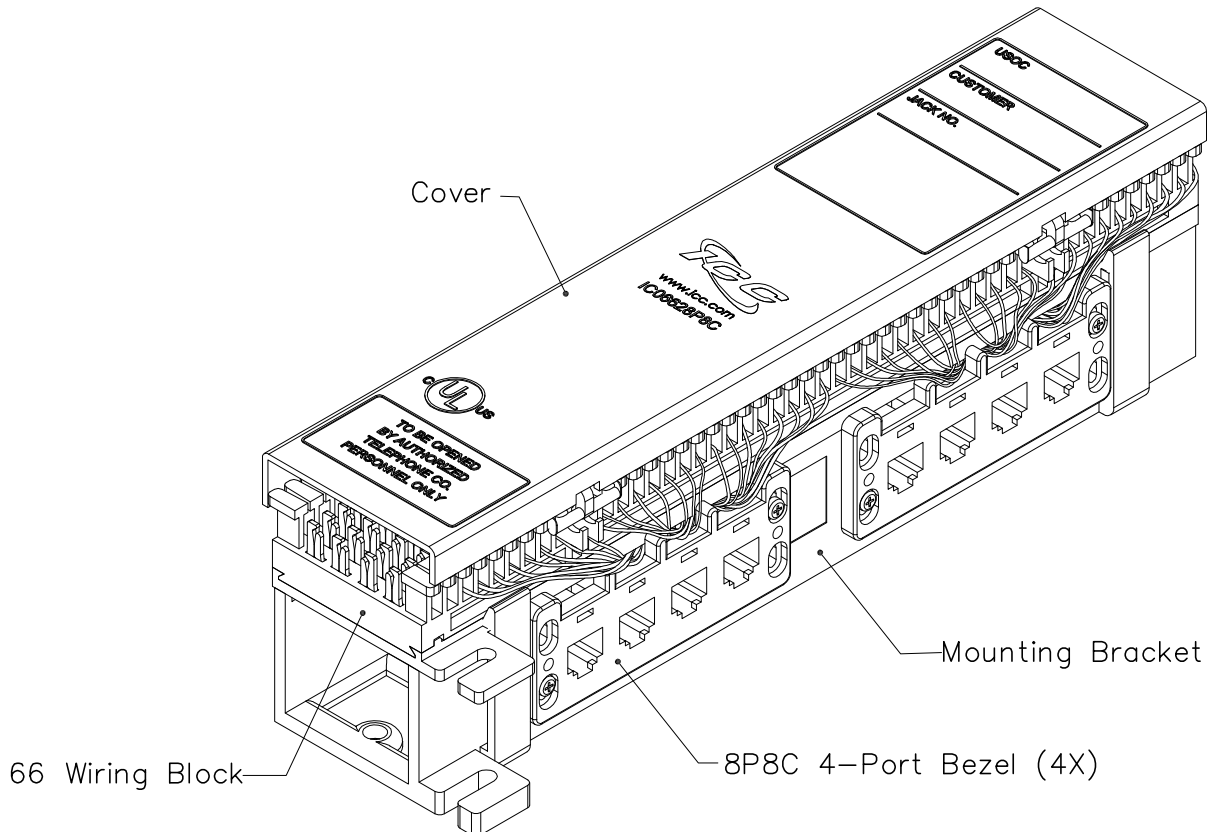

### Features and Benefits:

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BC025 66 wiring block bridging clips.
- Removable hinged cover provided.
- Accepts 22~24 AWG.




### 66 WIRING BLOCK, 12-JACKS, 8P8C

ITEM NO. IC06628P8C  
DWG NO. PS06628P8C

REV. B  
PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

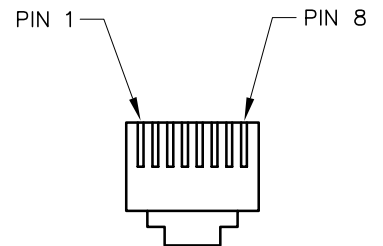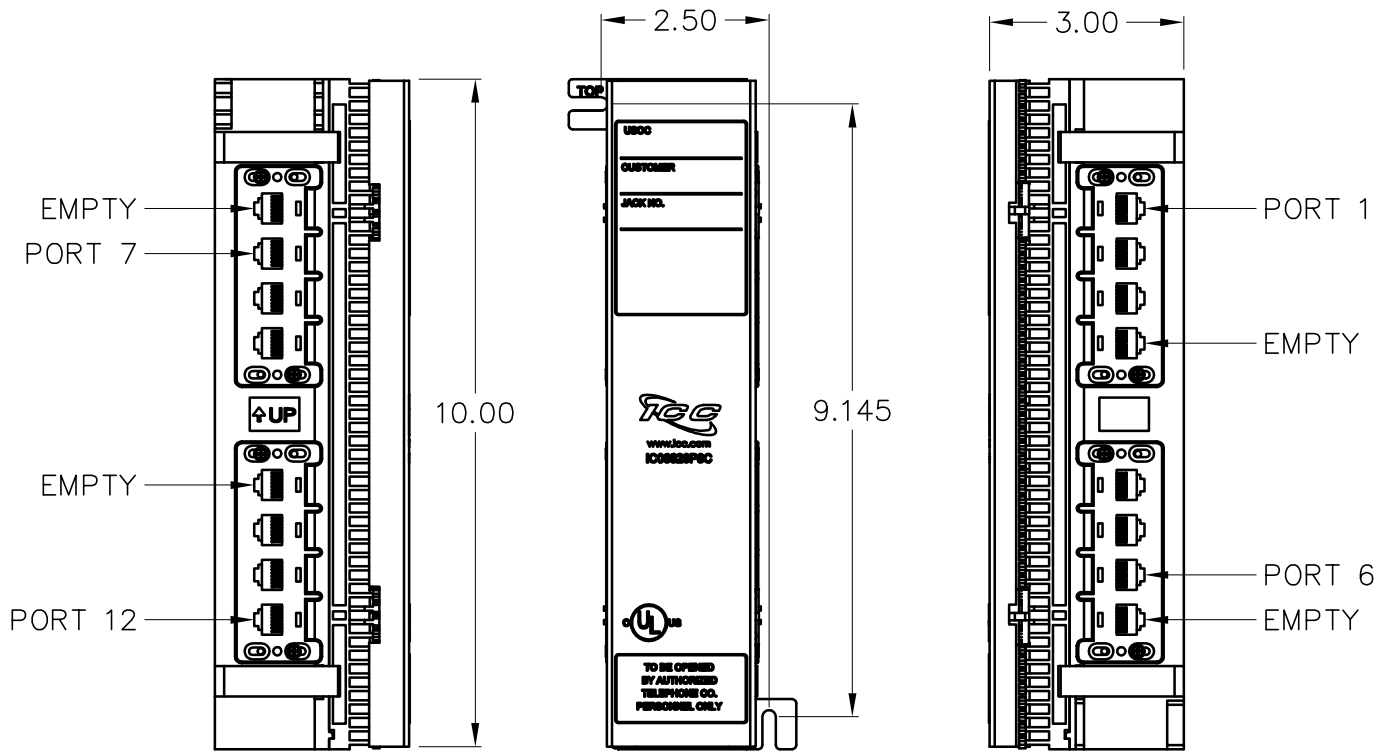

**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. MATERIAL:**

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOW PLATED WITH 50 MICRO-INCH OF GOLD OVER 70~100 MICRO INCH OR NICKEL

**2. TEMPERATURE RANGE:**

- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. NONCONDENSING: 93%

**3. ELECTRICAL:**

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

**4. MECHANICAL:**

- A. RETENTION: 50N (11 LBF) FOR 60S ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22~24 AWG

PIN	WIRE COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

**66 WIRING BLOCK, 12-JACKS, 8P8C**

ITEM NO. IC06628P8C  
 DWG NO. PS06628P8C

REV. B  
 PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com