


Prewired 25-Pair 66 Wiring Block w/Single Female Telco Connector

PRODUCT SPECIFICATION

Package includes:

- A. Prewired 25-Pair 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc
- D. Female Amphenol Connector, 1 pc

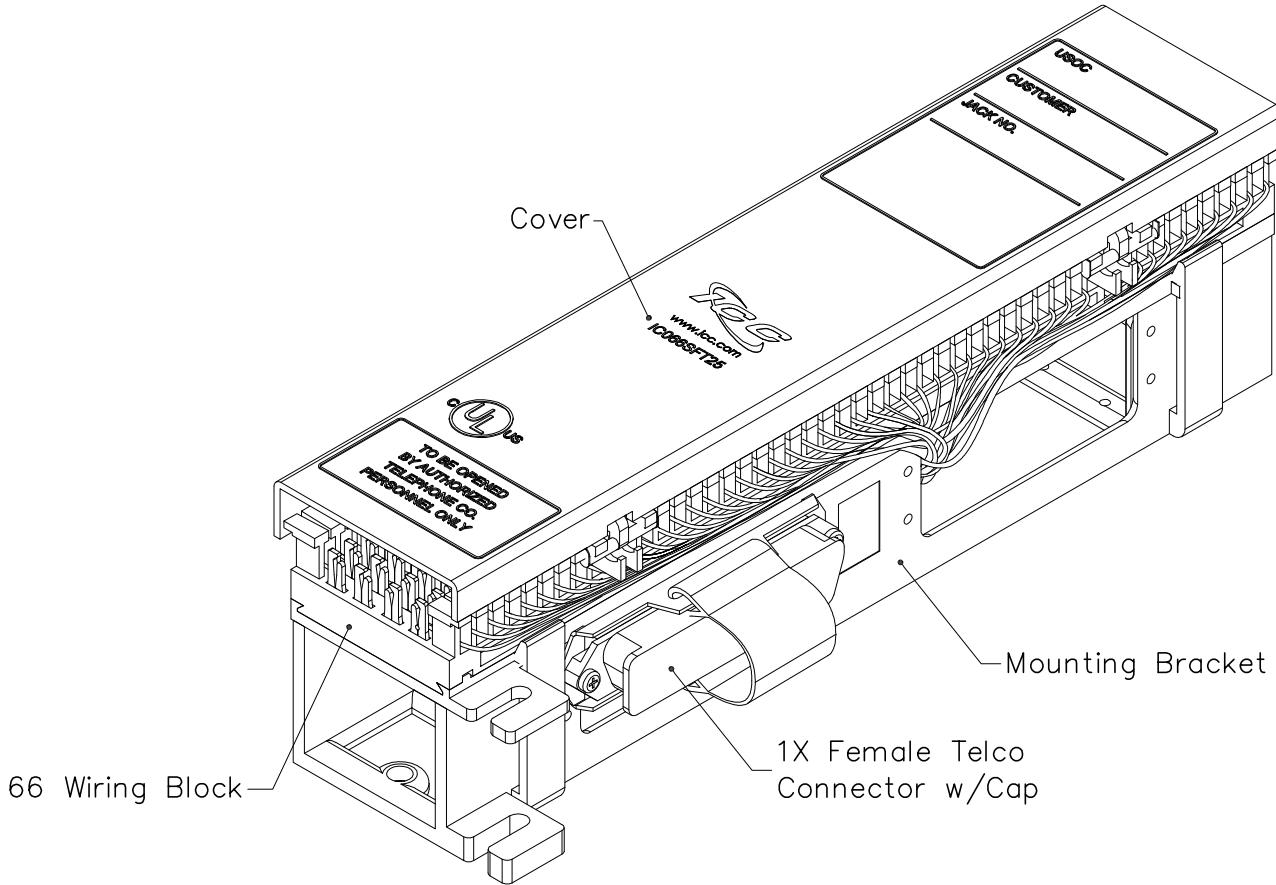

Features and Benefits:

Single prewired female amphenol connector facilitates installation and saves time.

Designed for data, voice, PBX systems, and low voltage telecom equipment.

Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-B.2

Durable and strong high impact flame retardant material.

Includes removable 89D mounting bracket for wall mounting.

Accommodates IC066BC025 66 wiring block bridging clips.

Includes velcro security straps to maintain integrity of connection with telco assembly.

Removable hinged cover provided.


Accepts 22~26 AWG.

66 WIRING BLOCK, SINGLE FEM TELCO, 25 PR

ITEM NO.	IC066SFT25	REV.	A
DWG NO.	PS066SFT25	PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638* www.icc.com

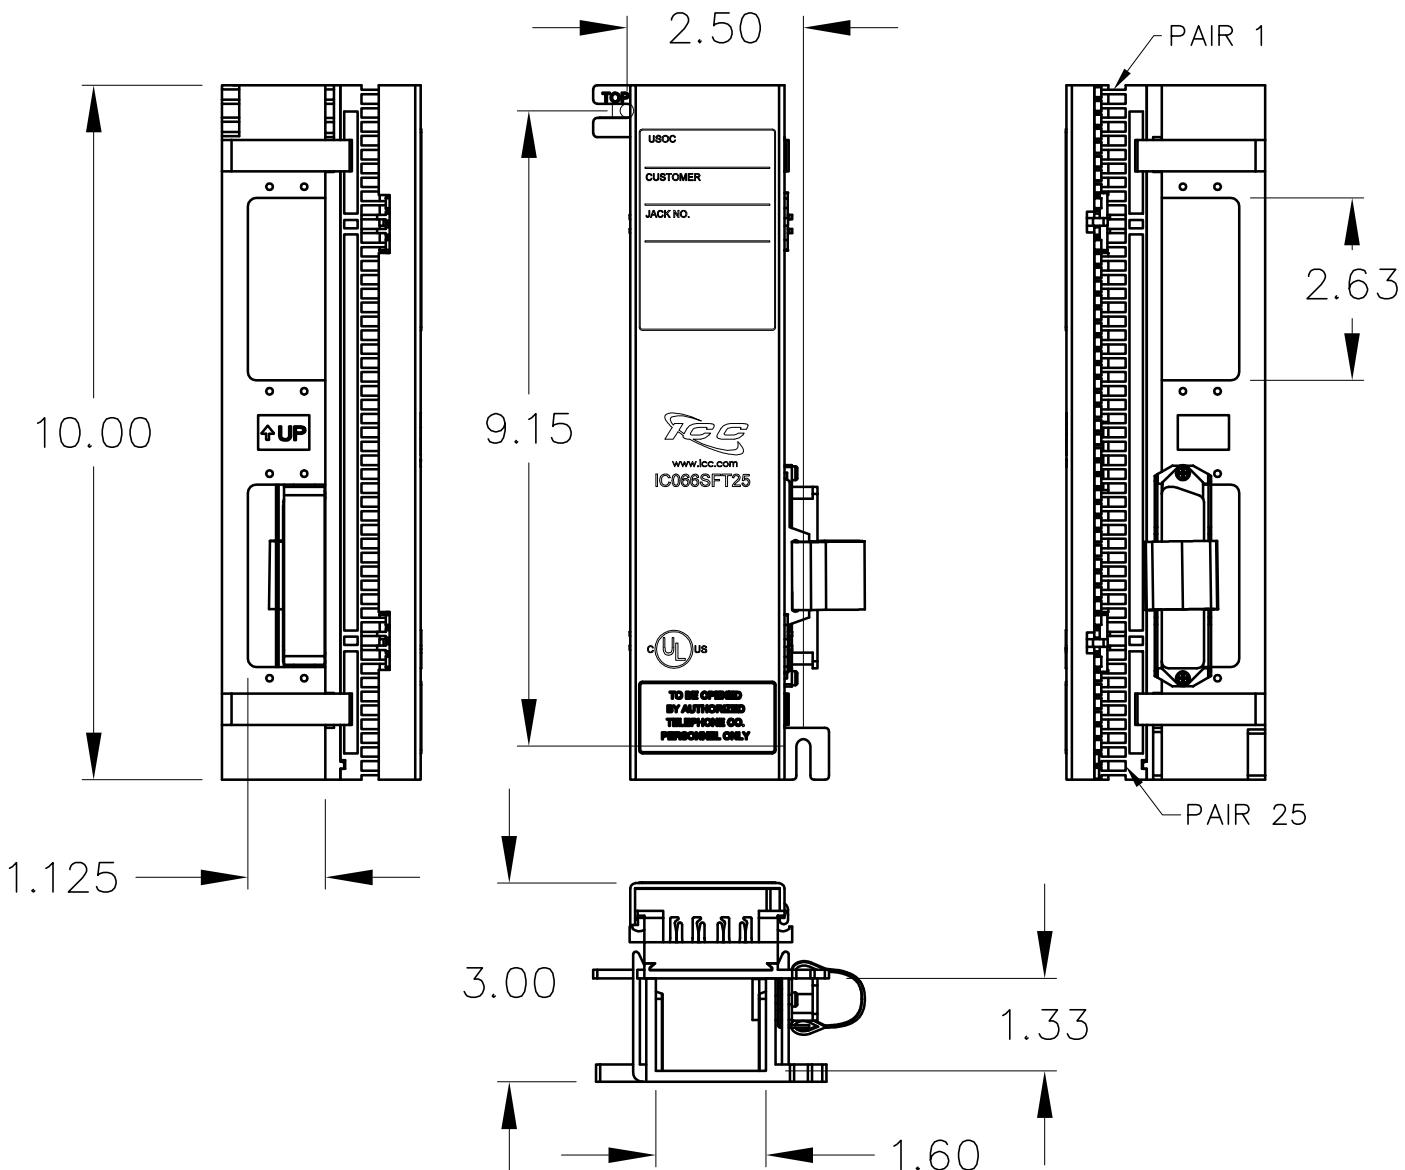

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. TERMINALS: GOLD OVER NICKEL PLATED COPPER ALLOY

2. TEMPERATURE RANGE:

- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. NONCONDENSING: 93%

3. ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

4. MECHANICAL:

- A. EXTRACTION FORCE: MINIMUM 5N FOR 24 AWG
MINIMUM 3N FOR 26 AWG
- B. INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22~26 AWG

25	VIOLET/GRAY	GRAY/VIOLET
24	VIOLET/BROWN	BROWN/VIOLET
23	VIOLET/GREEN	GREEN/VIOLET
22	VIOLET/ORANGE	ORANGE/VIOLET
21	VIOLET/BLUE	BLUE/VIOLET
20	YELLOW/GRAY	GRAY/YELLOW
19	YELLOW/BROWN	BROWN/YELLOW
18	YELLOW/GREEN	GREEN/YELLOW
17	YELLOW/ORANGE	ORANGE/YELLOW
16	YELLOW/BLUE	BLUE/YELLOW
15	BLACK/GRAY	GRAY/BLACK
14	BLACK/BROWN	BROWN/BLACK
13	BLACK/GREEN	GREEN/BLACK
12	BLACK/ORANGE	ORANGE/BLACK
11	BLACK/BLUE	BLUE/BLACK
10	RED/GRAY	GRAY/RED
9	RED/BROWN	BROWN/RED
8	RED/GREEN	GREEN/RED
7	RED/ORANGE	ORANGE/RED
6	RED/BLUE	BLUE/RED
5	WHITE/GRAY	GRAY/WHITE
4	WHITE/BROWN	BROWN/WHITE
3	WHITE/GREEN	GREEN/WHITE
2	WHITE/ORANGE	ORANGE/WHITE
1	WHITE/BLUE	BLUE/WHITE
PAIR NO.	TIP	RING
		WIRE COLOR

66 WIRING BLOCK, SINGLE FEM TELCO, 25 PR

ITEM NO.	IC066SFT25	REV.	A
DWG NO.	PS066SFT25	PAGE NO.	2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638* www.icc.com

ICC
Premium Products
Proven Performance
Competitive Prices