
24-Port 6P6C USOC Patch Panel

PRODUCT SPECIFICATION

Package includes:

- A. 24-Port 6P6C USOC Patch Panel, 1 pc
- B. 6" Cable Tie, 5 pcs
- C. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, 4 pcs
- D. Installation Instructions, 1 sheet

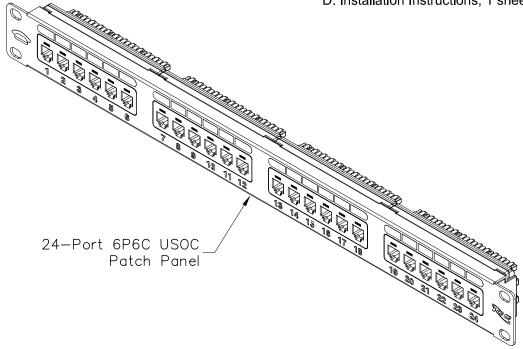


Features and Benefits:

- Rack mounted 6-position 6-conductor USOC patch panel provides voice connectivity applications
- Engineered to provide 110 IDC termination reducing installation time
- Includes USOC and UTP wiring label
- Designed to fit all standard 19" racks and cabinets
- 1 rack mount space (RMS)
- Terminate with ICACSPDT00 110 punch down tool
- Installation instructions
- UL listed

PATCH PANEL, USOC, 6P6C, 24-PORT, 1 RMS			
ITEM NO.	ICMPP024U6	REV. C	Premium Pi
DWG NO.	PSMPP024U6	PAGE NO. 1	



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

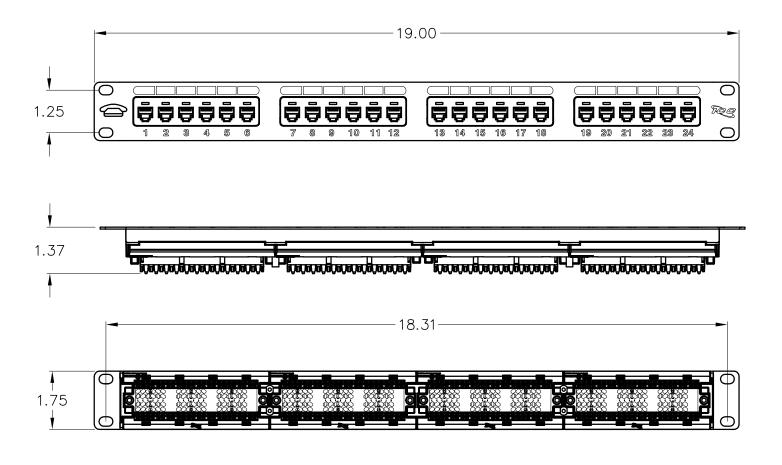

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. 24-PORT 6P6C USOC PATCH PANEL:
 - A. MATERIAL:
 - -24-PORT PATCH PANEL: 16 GA CRS
 - -JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
 - -SPRING WIRE: PHOSPHOR BRONZE
 - -110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
 - -GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL
 - B. SURFACE FINISH: BLACK POWDER COAT
 - C MECHANICAL:
 - -MATING FORCE: 100 GRAMS MIN/CONTACT

TEMPERATURE RANGE: -40°~70°C

- -PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- -IDC WIRE GAUGE: 22~24 AWG
- D. ELECTRICAL:
 - -CURRENT RATING: 1.5 AMP DC
 - -CONTACT RESISTANCE: 2.5 MILOHMS MAX

WIRING DIAGRAM:

6 POS. 6 COND.	110 CONNECTOR	COLOR
4	1	WHITE/BLUE
3	7	BLUE
2 5	3 4	WHITE/ORANGE ORANGE
1	5	WHITE/GREEN
<u> </u>	6	GREEN

UL) US FILE NO. 125268

PATCH PANEL, USOC, 6P6C, 24-PORT, 1 RMS				
ITEM NO.	ICMPP024U6	REV. C		
DWG NO.	PSMPP024U6	PAGE NO. 2 _		



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvðý, La Mirada, CA 90638 * www.icc.com