

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/06/2023	SREITER	GUTTADAURO

D

D

C

C

B

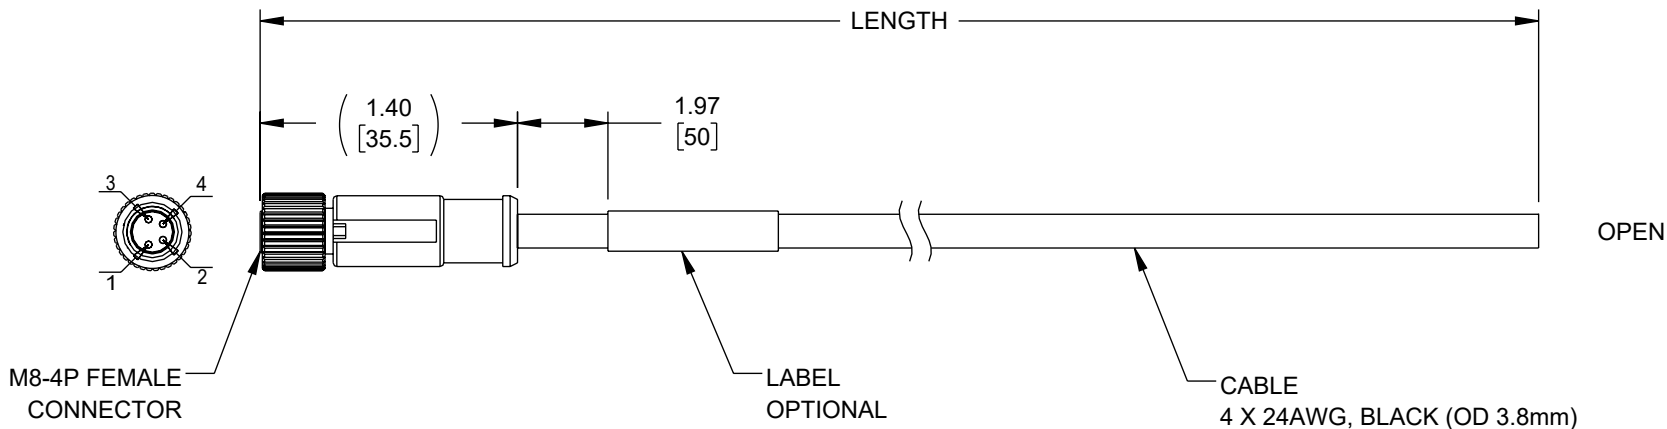
B

B

B

A

A





WIRING DIAGRAM		
FEMALE CONNECTOR		OPEN
1	BROWN	
2	BLACK	
3	WHITE	
4	BLUE	

PART NUMBER	LENGTH	
	FEET	METERS
M84PVC-FO-1M	3.3	1
M84PVC-FO-3M	9.8	3
M84PVC-FO-5M	16.4	5

NOTES:

- 100% OPEN, SHORT, MISWIRE TEST
- INSULATION RESISTANCE: 10MΩ MIN, 300VDC;
CONDUCTOR RESISTANCE: 3Ω MAX
- WATERPROOF IP67
- LEAD-FREE SOLDER TIN
- OPERATING TEMPERATURE RANGE: -20°C~80°C
- CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		Show Me CABLES an INFINITI® brand		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		DRAWN BY SREITER		04/06/2023						CATEGORY	
		CHECKED BY DGUST		04/06/2023							
		APPROVED BY GUTTADAURO		04/06/2023							
THIRD-ANGLE PROJECTION 		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CABLE ASSEMBLY							
				PRODUCT DESCRIPTION							
				SHOWMECABLES M8 4 POSITION CABLE, PVC JACKET, FEMALE/OPEN - 5M							
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE		CAGE CODE		ITEM NO.		REV.	
				A		3SVT8		M84PVC-FO-5M		A	
				SCALE: NONE		CAD FILE: M84PVC-FO-5M.SLDDRW				SHEET 1 OF 1	