


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/06/2023	SREITER	GUTTADAURO

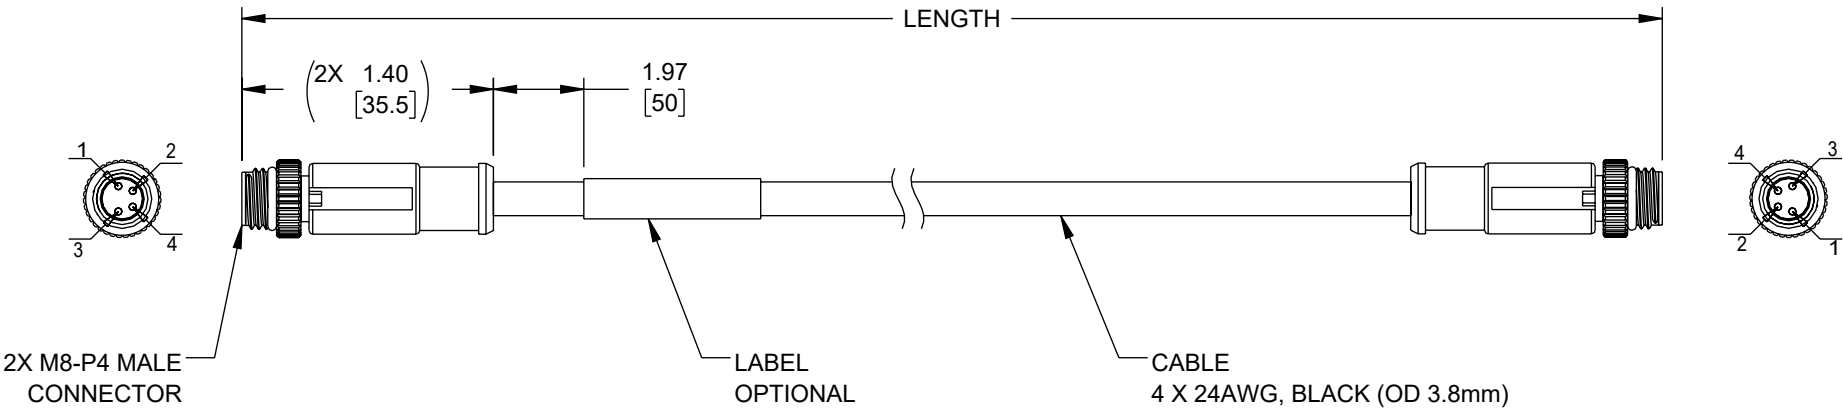


WIRING DIAGRAM

MALE CONNECTOR 1				MALE CONNECTOR 2
1	BROWN	1		
2	BLACK	2		
3	WHITE	3		
4	BLUE	4		

PART NUMBER	LENGTH	
	FEET	METERS
M84PVC-MM-1M	3.3	1
M84PVC-MM-3M	9.8	3
M84PVC-MM-5M	16.4	5

NOTES:

- 100% OPEN, SHORT, MISWIRE TEST
- INSULATION RESISTANCE: 10MΩ MIN, 300VDC;
CONDUCTOR RESISTANCE: 3Ω MAX
- WATERPROOF IP67
- LEAD-FREE SOLDER TIN
- OPERATING TEMPERATURE RANGE: -20°C~80°C
- CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515 Show Me CABLES an INFINITI® brand	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY SREITER		04/06/2023			
		CHECKED BY DGUST		04/06/2023			
		APPROVED BY GUTTADAURO		04/06/2023			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY			
				PRODUCT DESCRIPTION SHOWMECABLES M8 4 POSITION CABLE, PVC JACKET, MALE/MALE - 5M			
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 3SVT8	ITEM NO. M84PVC-MM-5M	REV. A
				SCALE: NONE CAD FILE: M84PVC-mm-5M.SLDDRW			SHEET 1 OF 1