


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/04/2023	SREITER	GUTTADAURO

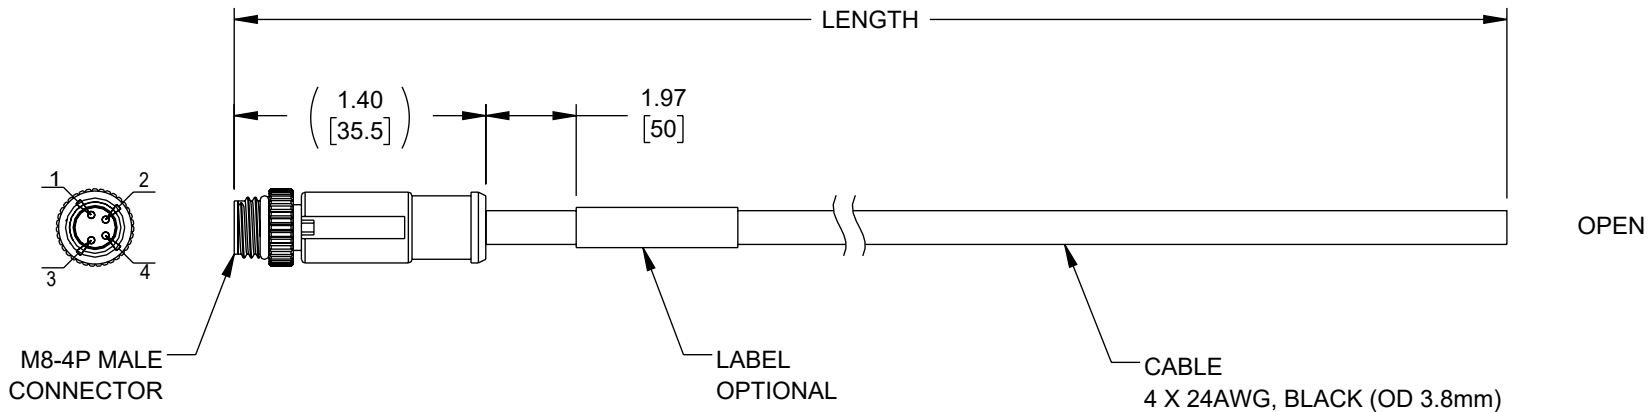


WIRING DIAGRAM		
MALE CONNECTOR		OPEN
1	BROWN	
2	BLACK	
3	WHITE	
4	BLUE	

PART NUMBER	LENGTH	
	FEET	METERS
M84PVC-MO-1M	3.3	1
M84PVC-MO-3M	9.8	3
M84PVC-MO-5M	16.4	5

NOTES:

- 100% OPEN, SHORT, MISWIRE TEST
- INSULATION RESISTANCE: 10MΩ MIN, 300VDC;
CONDUCTOR RESISTANCE: 3Ω MAX
- WATERPROOF IP67
- LEAD-FREE SOLDER TIN
- OPERATING TEMPERATURE RANGE: -20°C~80°C
- CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		Show Me CABLES an INFINITI® brand		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY SREITER		04/04/2023		CATEGORY		CABLE ASSEMBLY	
		CHECKED BY DGUST		04/05/2023					
		APPROVED BY GUTTADAURO		04/05/2023					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION SHOWMECABLES M8 4 POSITION CABLE, PVC JACKET, MALE/OPEN - 1M					
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 3SVT8	ITEM NO. M84PVC-MO-1M	REV. A		
				SCALE: NONE		CAD FILE: M84PVC-MO-1M.SLDDRW		SHEET 1 OF 1	