


Show Me CABLES

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

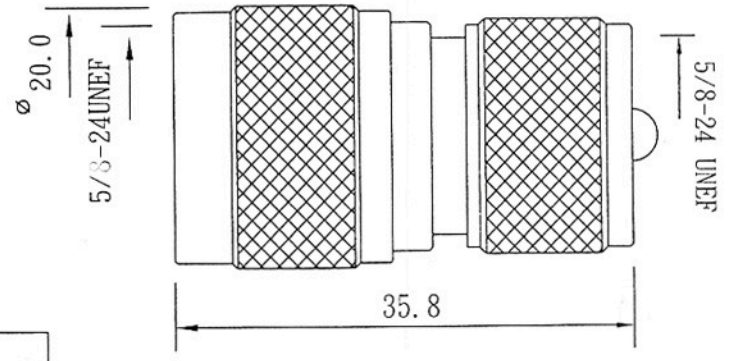

Impedence	50 ohms
Frequency Range	0-3GHz
Amissible Power	600W-1.0GHz 400W-2.0GHz
Insertion Loss (max)	0.1dB (≤ 2.0GHZ)
Reflection coefficient	VSWR < 1.1:1
Intermodulation product	160 dbc 2x46dBm f ≤ 2.0GHz

N PLUG-UHF PLUG

3	Insulator	Delrin	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
NO	Description	Material	Finish

BY	DATE		
DRAWN TN	00/00/00		
CHK'D		PART NO	
APPRV			
MATERIAL	SEE NOTES		
FINISH	SEE NOTES	UNITS mm	SHEET 1 OF 1
		SCALE NONE	