


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/16/2020	PHOSPODAR

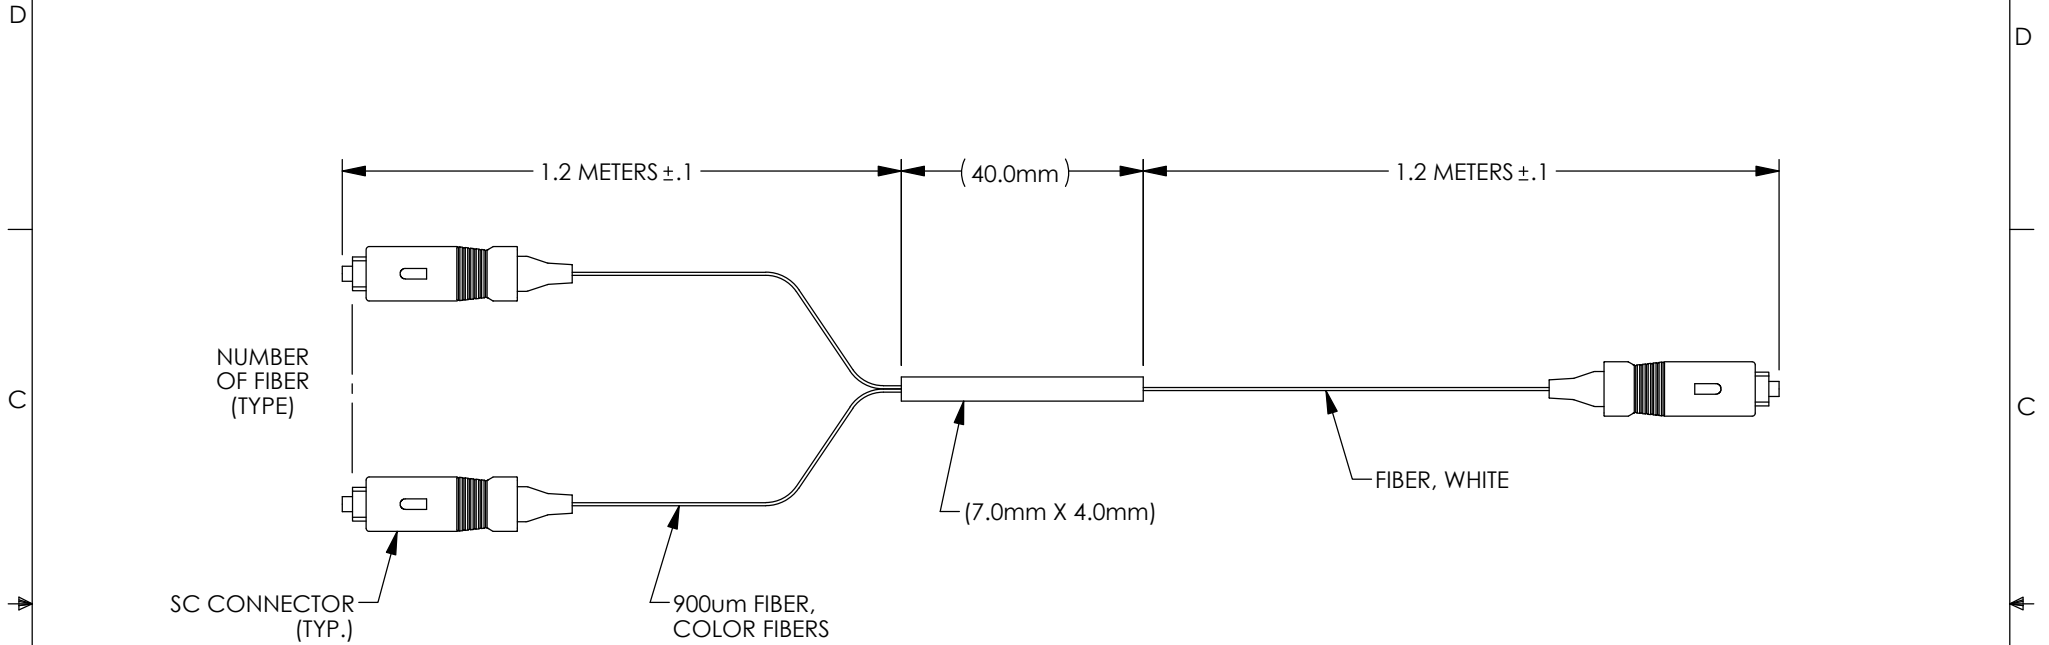

MODEL NUMBER	TYPE	OPERATING WAVELENGTH	INSERTION LOSS (dB) MAX (P/S)	RETURN LOSS MIN (P/S)
PP5P-04BSS-155N	1 X 4	1260nm-1650nm	7.0/7.7	50/55
PP5P-08BSS-155N	1 X 8		10.5/11	
PP5P-16BSS-155N	1 X 16		13.5/14	
PP5P-32BSS-155N	1 X 32		16.5/17	

NOTES:

- STANDARD SPLIT: 50/50
- SC CONNECTOR ASSEMBLY POLISH TYPE: APC
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- OPERATING TEMPERATURE RANGE: -40° C ~ +85° C
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ± 1° .XXX = ±.005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936			
	DRAWN BY DFRISIELLO	11/16/2020		CATEGORY FIBER OPTICS		
	CHECKED BY PHOSPODAR	11/16/2020				
	APPROVED BY PHOSPODAR	11/16/2020				
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION Passive PLC, Field Unit PLC Splitter, Standard (Even) Split 900um colored fiber SC/APC	SIZE A	CAGE CODE 43321	ITEM NO. PP5P-xxxxx-155N	REV. A
SCALE: NONE		CAD FILE: PP5P-xxxxx-155N.SLDDRW		SHEET 1 OF 1		