


PLENUM (6) 26AWG COAX WITH (2) 22AWG SHIELDED TWISTED PAIRS

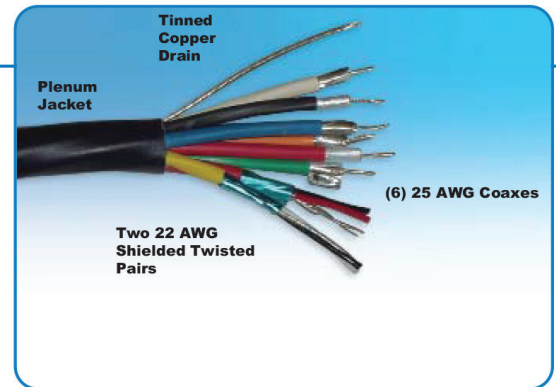

TECHNICAL SPECIFICATIONS

ELEMENT 1

Coaxes	26 AWG (7/34), Tinned Copper, Foam Fluorinated Ethylene Propylene
Dielectric	0.075" Diameter
Outer Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Inner Shield	38 AWG Tinned Copper, 95% Coverage
Jacket	Polyvinyl Chloride, 0.008" Wall Thickness
Final Diameter	0.102"
Number of Coaxes	6
Color Code	1. Red, 2. Green, 3. Blue, 4. Black, 5. White, 6. Yellow

ELEMENT 2

Twisted Pairs	22 AWG (7/30) Tinned Copper, Stranded Individually Shielded Twisted Pairs
Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Drain Wire	22 AWG (7/30) Tinned Copper
Jacket	Polyvinyl Chloride .008" Wall Thickness
Final Diameter	0.108"
Number of Pairs	2
Color Code	1. Red & Black 2. Black & Yellow


CONSTRUCTION

Conductors	Elements 1 & 2
Drain Wire	22 AWG (7/30) Tinned Copper, Over Tape
Jacket	Polyvinyl Chloride, 0.020" Wall Thickness
Final Diameter	0.383"
Color	Blue

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code



Technical Information

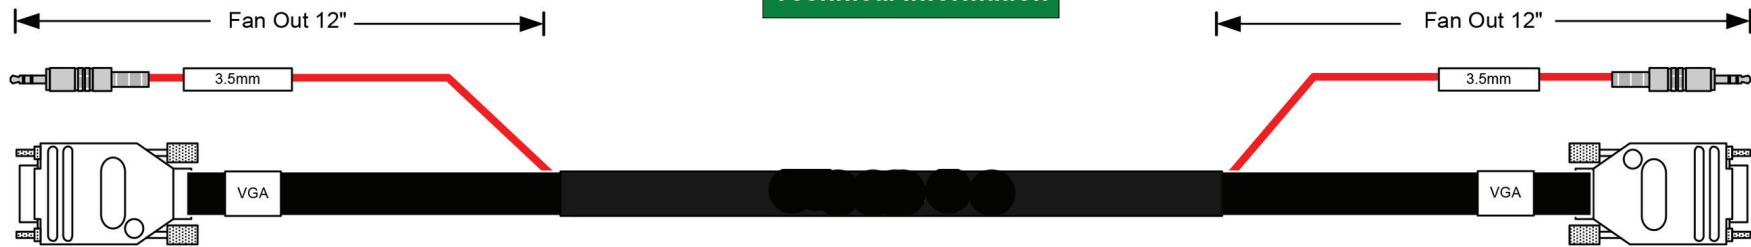


Plenum 10 Conductors Cable



Front (mating) view

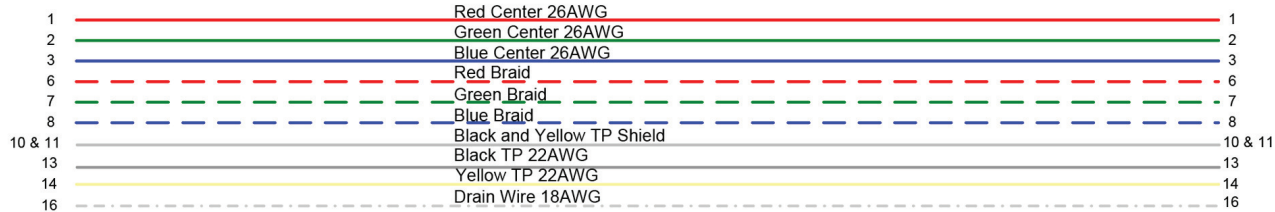



Front (mating) view



Notes:
Labeled one end of the cable and covered with clear heat shrink.
All fan outs to be covered in black heat shrink tubing.

VGA WITH 3.5MM M/M

Show Me
CABLES

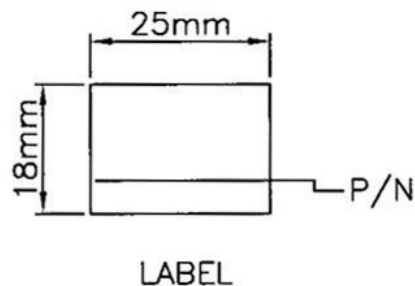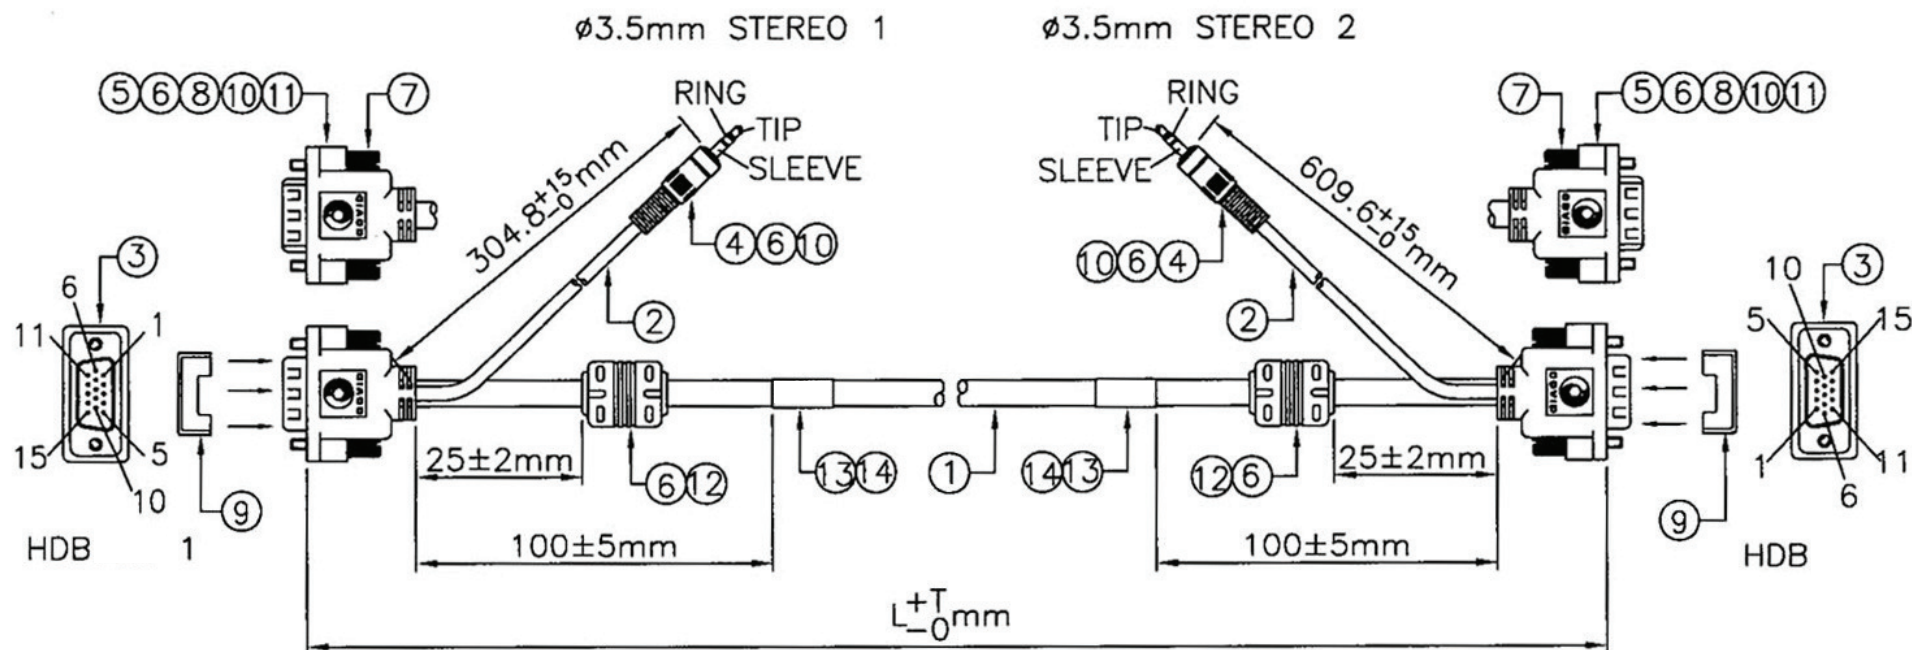

MC-VGAA-25	7620	75
MC-VGAA-15	4572	50
MC-VGAA-10	3048	35
MC-VGAA-06	1830	30
MC-VGAA-03	915	20
P/N.	L(mm)	T(mm)

UNIT: mm	TITLE	HDB	+AUDIO/
SCALE	NONE	HDB	+AUDIO CABLE ASS'Y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	DR.
x ± x xx ± xx			CH.
xxx ± xxx ANGLE ±			AP.
SHEET		DWG.NO.	