


Show Me CABLES

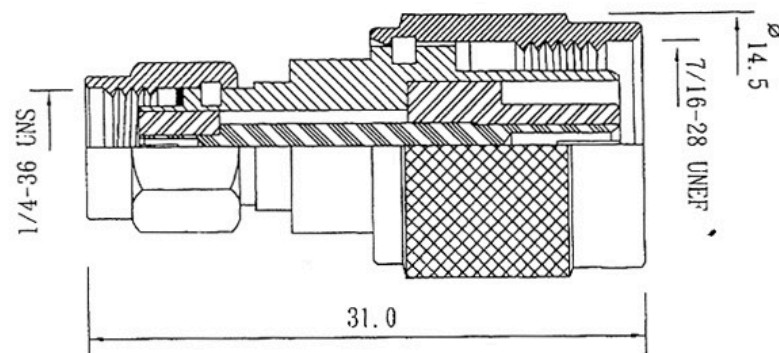

Impedance	50 Ω
Frequency range	0 to 18 GHz
Voltage rating	RG-55, 58, 141, 142, 223, 303: 500 volts peak RG-122, 174, 188, 316, 375: 375 volts peak
VSWR (straight connectors)	RG-55 group: 1.15 $\pm$ 0.011 (GHz) RG-178 group: 1.20 $\pm$ 0.251 (GHz)
Contact resistance	Center: 2.0 milliohms Body: 2.0 milliohms Braid to body: 0.5 milliohms
Insulation resistance	5000 M Ω
Insertion loss	0.03 $\sqrt{f}$ (GHz) dB max

Insulator	Teflon	White
Contact	PH/Bronze	Gold
Body	Brass	Nickel
Description	Material	Finish

BY	DATE		
DRAWN			
CHK'D			
APPRV			
MATERIAL SEE NOTES		PART NO	
FINISH SEE NOTES		UNITS	SHEET 1 OF 1
		mm	
		SCALE	NONE