

6

5


4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	12/12/2024	TUOFRENE	DGUST


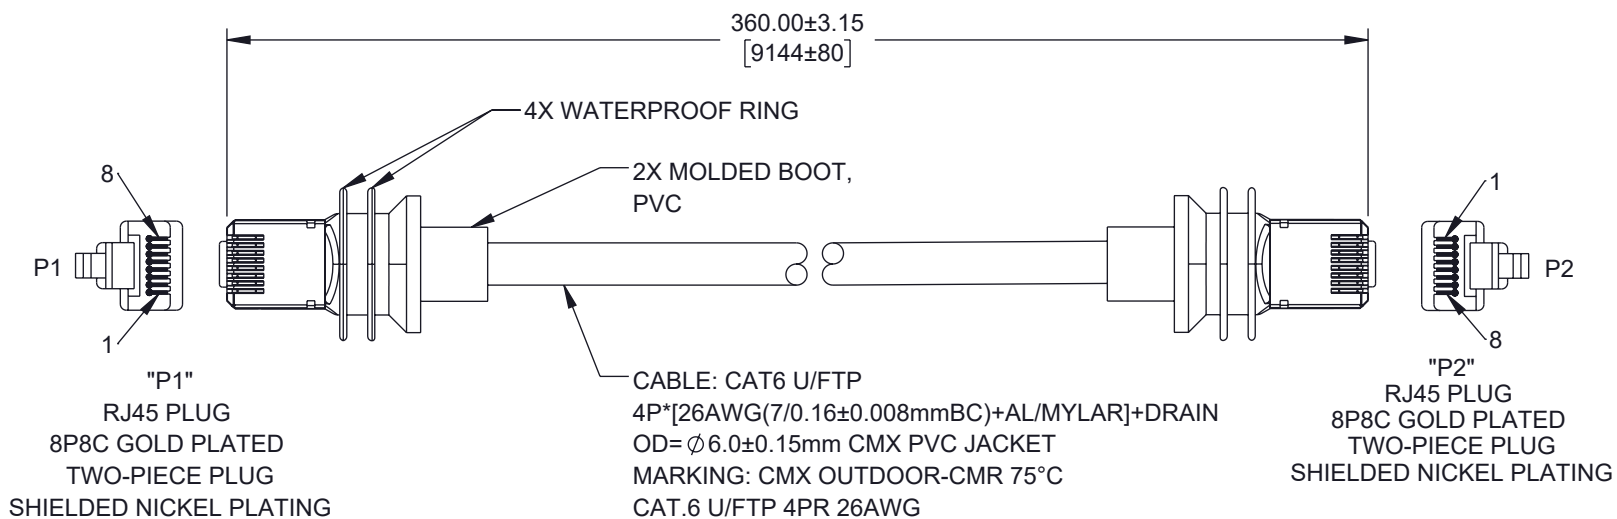


## NOTES:

- OVERVIEW:  
BANDWIDTH: 250MHZ  
WIRING SCHEME – T568B  
TEMPERATURE RATING  
INSTALLATION: 0°C~50°C  
OPERATION: -40°C~75°C  
VOLTAGE RATING – 30V  
UV RESISTANT  
INSULATION – FMPE  
DIAMETER – 1.04±0.05mm.
- ELECTRICAL CHARACTERISTICS  
CONDUCTOR DC RESISTANCE – 15.2Ω/100m (MAXIMUM)  
IMPEDANCE – 100Ω  
CAPACITANCE – 5600PF/100m  
PROPAGATION DELAY – 545NS/100m (MAXIMUM)  
DELAY SKEW – 45NS/100m (MAXIMUM)  
PASS FLUKE DSX 8000 CHANNEL TEST

## REGULATORY COMPLIANCE:

EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION).

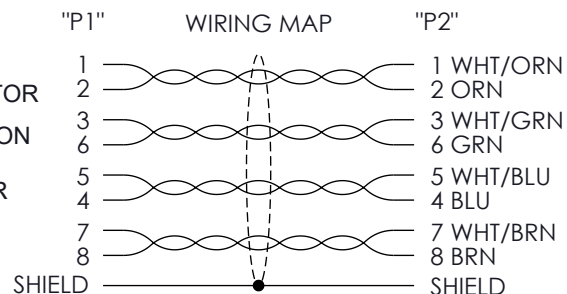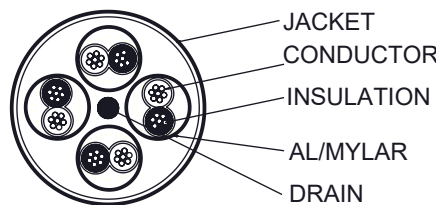

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS		<b>Show Me</b> CABLES an INFINIT® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: X = ±.2 [5] .XX = ±.02 [0.5] .XXX = ±.005 [0.13]		FRACTIONS ± 1/32 ANGLES ± 1°		SCALE NONE	SHEET 1 OF 1
CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		Website: <a href="http://www.ShowMeCables.com">www.ShowMeCables.com</a> Phone: 1.888.519.9505		DESCRIPTION STARLINK G3 REPLACEMENT CABLE, M-M, 30F	
SIZE A	CAGE CODE 3SVT8	DRAWN BY TUOFRENE	ITEM NO. SLG3-RCMM-30F	REV A	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1