

6

5

4

3

2

1

F

E

D

C

B

A

F

E


D

C

B

A


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	02/21/2025	KGLEBOVA	THOUGHTON

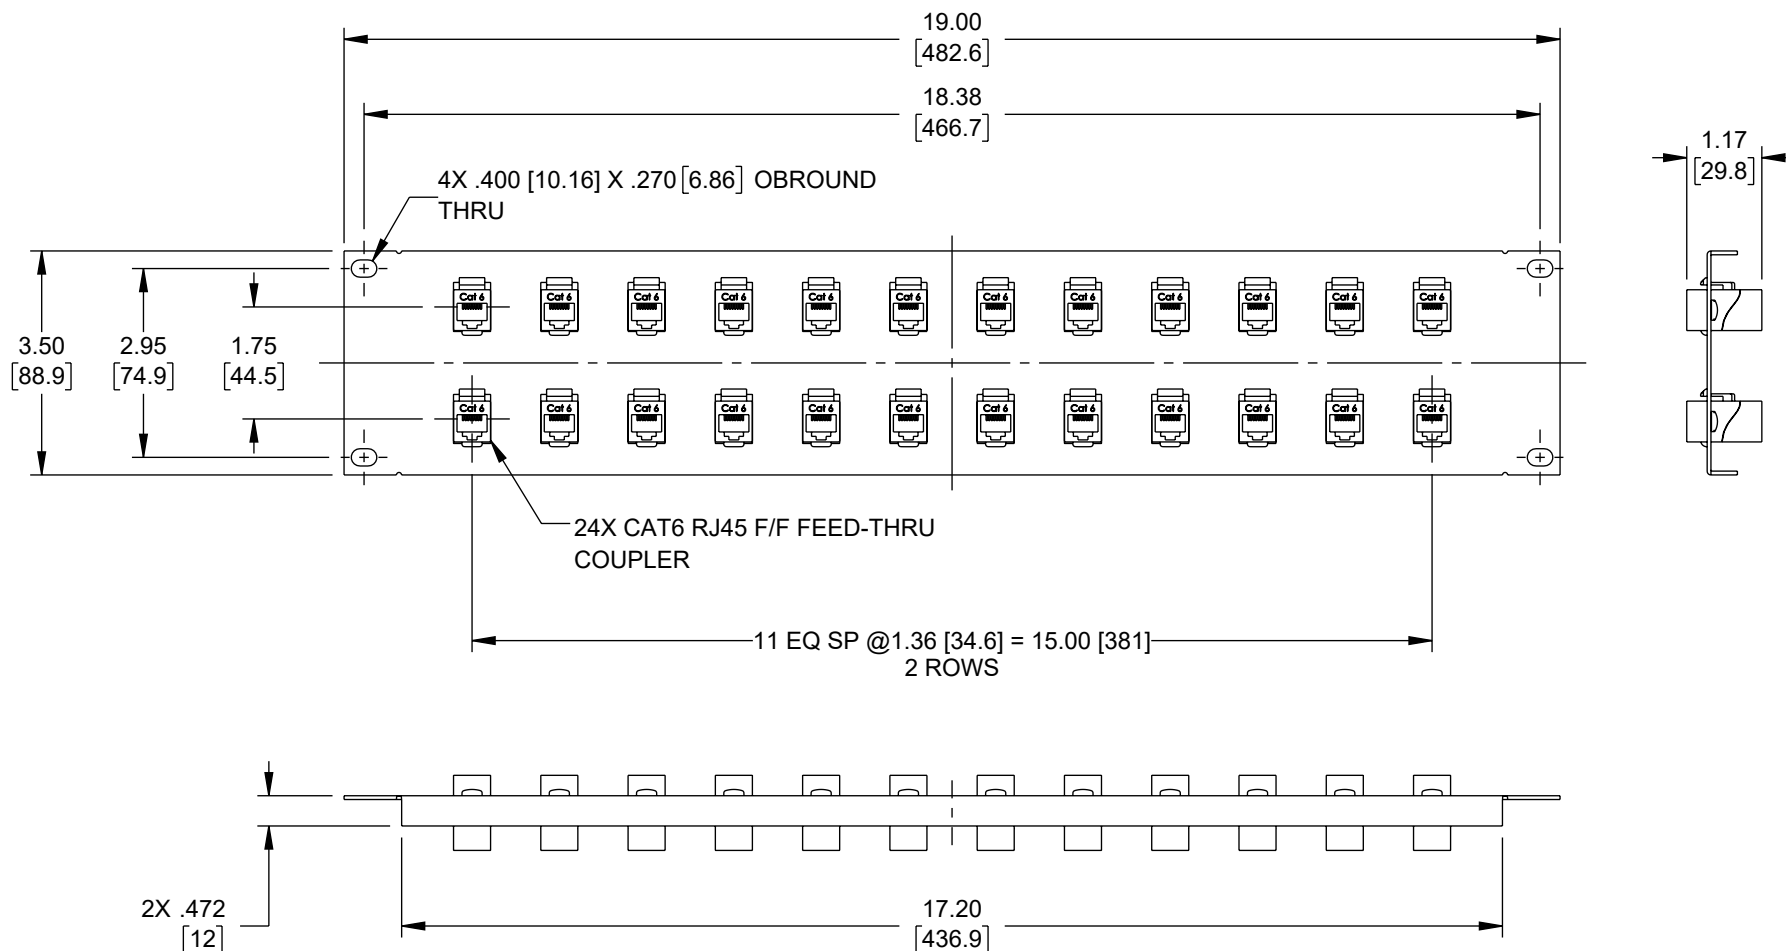

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. MATERIAL: .06 [1.5] THICK COLD ROLLED STEEL.
3. PANEL FINISH: FLAT BLACK POWDER COAT.
4. HARDWARE PACK IS INCLUDED.
5. SLOTS TO INCLUDE SILK SCREEN NUMBERING.
6. PANEL COMPONENT SHALL BE INDIVIDUALLY PACKAGED AND LABELED IN ACCORDANCE WITH SPECIFICATION PS-0014.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		Show Me™ CABLES an INFINIT® brand Website: www.ShowMeCables.com Phone: 1.888.519.9505			
TOLERANCES:				INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
X = ±.2 [5] XX = ±.02 [0.5] XXX = ±.005 [0.13] FRACTIONS ± 1/32 ANGLES ± 1°				SCALE	
				NONE	
				SHEET	
				1 OF 1	
CABLE LENGTH TOLERANCES:		DESCRIPTION 2U (3.5") 19 INCH PANEL WITH 24 CAT6 COUPLERS			
≤12 [305] = +1 [25] / -0					
>12 [305] ≤ 60 [1524] = +2 [51] / -0					
>60 [1524] ≤ 120 [3048] = +4 [102] / -0					
>120 [3048] ≤ 300 [7620] = +6 [152] / -0					
>300 [7620] = +5% / -0					
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY					
SIZE	CAGE CODE	DRAWN BY	ITEM NO.		REV
A	3SVT8	KGLEBOVA	SM35-C6-24		A

6

5

4

3

2

1