
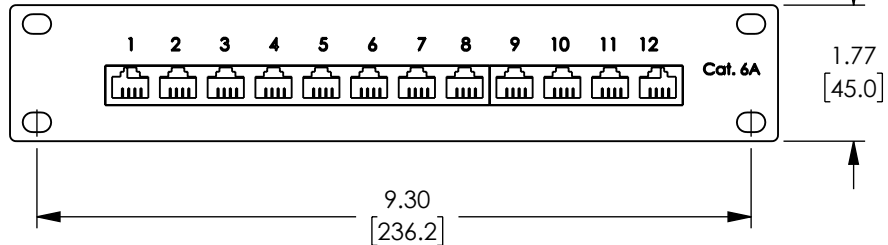
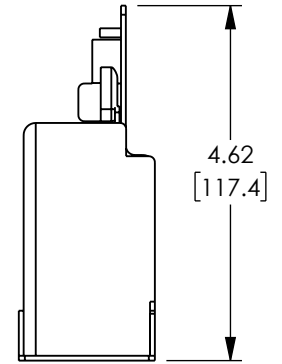
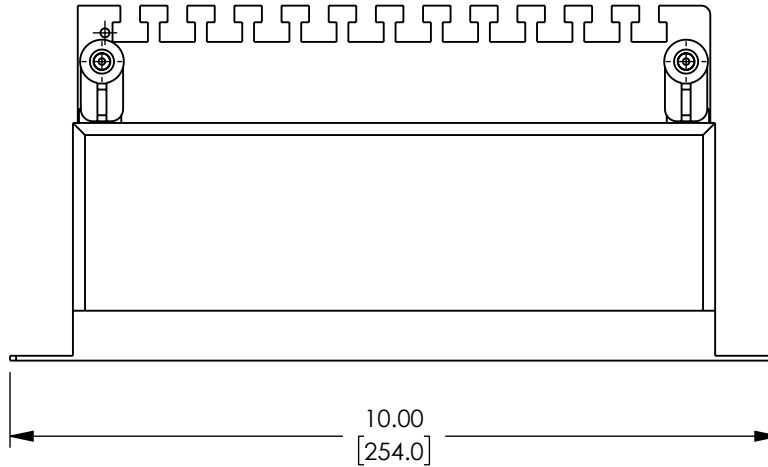


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	06/16/2023	THOUGHTON

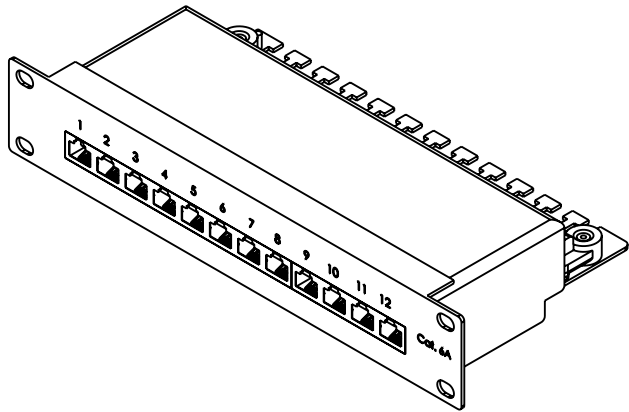

#### TYPE:

- 10" CAT6A 1U 12PORT SHIELDED PATCH PANEL
- COLOUR: BLACK
- KRONE IDC

#### ELECTRICAL:


- CONTACT RESISTANCE: 20m OHM
- INSULATION RESISTANCE:  $\leq 250M$  OHM @100 V DC
- WITHSTAND VOLTAGE: DC1000V AC700V RMS 60HZ, 1MIN
- CAT6A PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

#### ENVIRONMENTAL:

- STORAGE:  $-40^{\circ}$  /  $+70^{\circ}$ .
- OPERATION:  $-10^{\circ}$  /  $+60^{\circ}$ .

#### MECHANICAL:

- METAL MATERIAL: COLD ROLLED PLATE
- PLASTIC MATERIAL: NEW PC
- GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
- TERMINAL PINS: PHOSPHOR BRONZE, ZIN PLATING
- RJ45 CONTACT LIFE: 750 TIMES MIN
- IDC TERMINAL LIFE: 250 TIMES MIN

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0  ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]             FRACTIONS      ± 1/32 .XX = ± .02 [.5]           ANGLES      ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	<div><div>Show Me</div><div>CABLES</div><div>an INFINITI brand</div></div> <div>115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515</div>		
	DRAWN BY PSRINIVAS	06/16/2023			CATEGORY
	CHECKED BY DFRISIELLO	06/16/2023			
	APPROVED BY THOUGHTON	06/16/2023			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION		
			CAT6A STP 10" Patch Panel, 1 pack, Black		
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE	CAGE CODE	ITEM NO.	REV.
		A	3SVT8	SMC-10PP12C6A	A
			SCALE: NONE    CAD FILE: SMC-10PP12C6A.SLDDRW		