
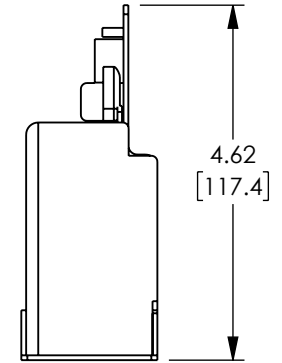
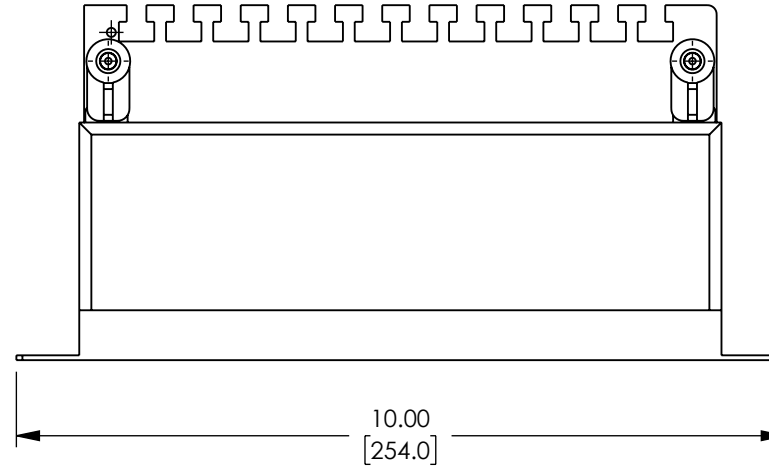


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	INITIAL RELEASE	06/16/2023	THOUGHTON

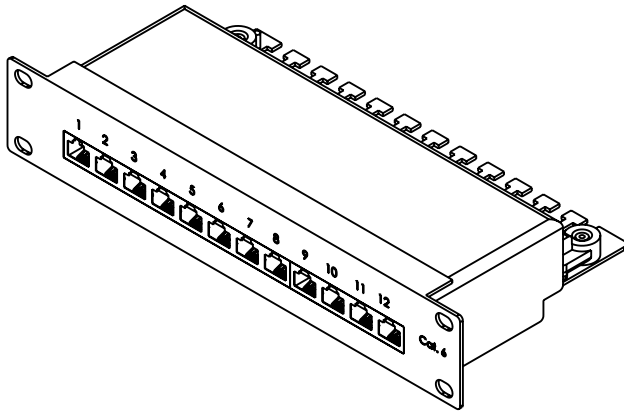

TYPE:

- 10" CAT6 1U 12PORT SHIELDED PATCH PANEL
- COLOUR: BLACK
- KRONE IDC

ELECTRICAL:


- CONTACT RESISTANCE: 20m OHM
- INSULATION RESISTANCE: $\leq 250\text{M OHM @100 V DC}$
- WITHSTAND VOLTAGE: DC1000V AC700V RMS 60HZ, IMIN
- CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10


ENVIRONMENTAL:

- STORAGE: $-40^{\circ} / +70^{\circ}$.
- OPERATION: $-10^{\circ} / +60^{\circ}$.

MECHANICAL:

- METAL MATERIAL: COLD ROLLED PLATE
- PLASTIC MATERIAL: NEW PC
- GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
- TERMINAL PINS: PHOSPHOR BRONZE, ZIN PLATING
- RJ45 CONTACT LIFE: 750 TIMES MIN
- IDC TERMINAL LIFE: 250 TIMES MIN

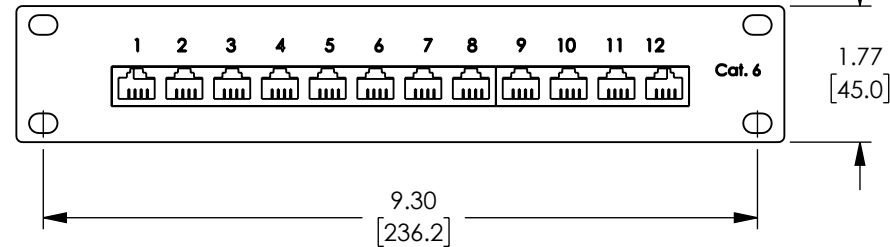

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	<div>Show Me</div> <div>CABLES</div> <div>an INFINITI brand</div>		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
	DRAWN BY PSRINIVAS	06/16/2023				
	CHECKED BY DFRISIELLO	06/16/2023				
	APPROVED BY THOUGHTON	06/16/2023				
	CATEGORY		Patch Panels			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION CAT6 STP 10" Patch Panel, 1 pack, Black			
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 3SVT8	ITEM NO. SMC-10PP12C6	REV. A	
		SCALE: NONE	CAD FILE: SMC-10PP12C6.SLDDRW		SHEET 1 OF 1	