

6

5

4


3

2


1

REVISION


ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-13993	11/26/2024	HBAKKE	DGUST



"P1"
XLR FEMALE, 3-PIN
SHIELDED CONNECTOR
NICKEL PLATING

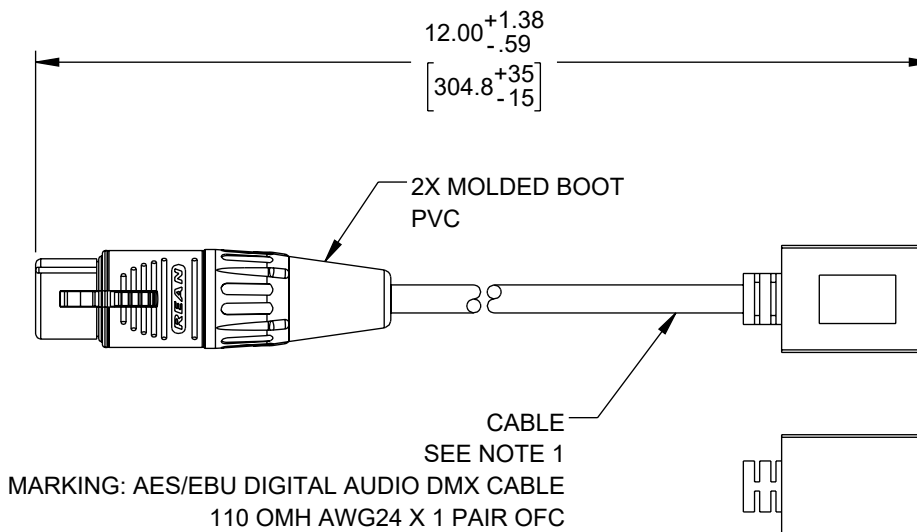

1.....8





"P2"
RJ45 (8P8C) FEMALE
SHIELDED CONNECTOR
GOLD PLATING

NOTES:

1. CABLE: 2C*24AWG(7/0.20±0.008 mm)TOFC+FILLER+PP+AL/MYLAR +DRAIN(7/0.20TPFC)+ BRAID(16*8/0.12TOFC)
JACKET: HIGH-FLEX PVC, OD: .264±.008 [6.7±0.20].
2. CONTACT MATERIAL: P1: COOPER ALLOY, SILVER PLATING,
3. P2: COOPER ALLOY, GOLD PLATING.
4. IMPEDENCE: 110 OHMS.
5. INSULATION TEMPERATURE RANGE: 0°C TO +~50°C.
6. OPERATION TEMPERATURE RANGE: -20°C TO +~60°C.
7. VOLTAGE RATING: 30V.
8. ELECTRICAL TEST: 100% OPEN AND SHORT TEST.
9. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
10. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION).

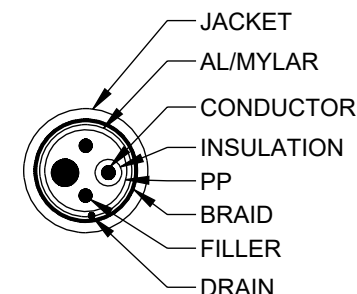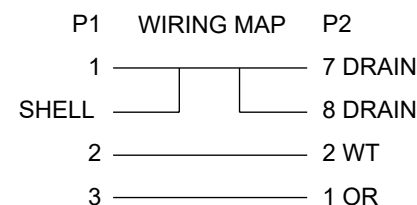

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5] FRACTIONS
.XX = ±.02 [0.5] ± 1/32
.XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

Show Me
CABLES
an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
DMX CA, 3P XLR F TO RJ45 F, BLK, 1FT				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	KGLEBOVA	SMDMXRJ02-ADP	B

6

5

4

3

2

1