
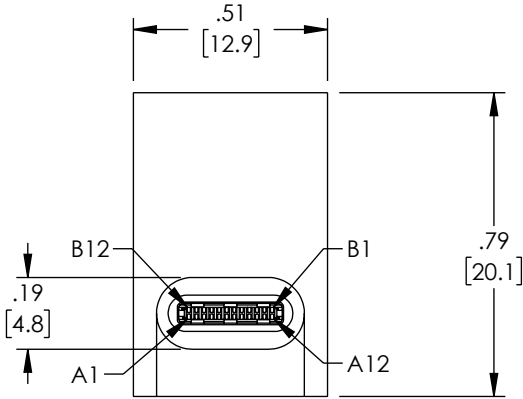



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

WIRING MAP	
"J1"	"P1"
A1	A1
A2	A2
A3	A3
A4	A4
A5	A5
A6	A6
A7	A7
A8	A8
A9	A9
A10	A10
A11	AA11
A12	A12
B1	B1
B2	B2
B3	B3
B4	B4
B5	B5
B6	B6
B7	B7
B8	B8
B9	B9
B10	B10
B11	B11
B12	B12
SHELL	SHELL

"J1"
USB TYPE C FEMALE
CONNECTOR

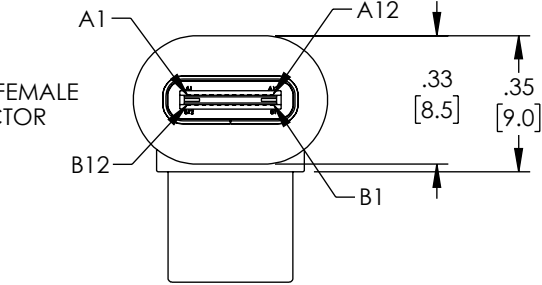

"P1"
USB TYPE C MALE
CONNECTOR

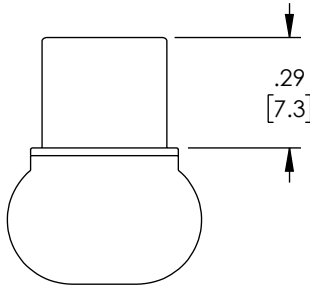

NOTES:

CONDUCTOR RESISTNCE: $\leq 10\Omega$
INSULATION RESISTANCE: $\geq 5M\Omega$
WITHSTAND VOLTAGE: DC 300V / 10mS

1. ADAPTER SHALL BE TESTED FOR CONTINUITY.
2. ADAPTER SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/10/2023	GUTTADAURO

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [.5] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1° THIRD-ANGLE PROJECTION 	APPROVALS	DATE	 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515
	DRAWN BY DFRISIELLO	01/06/2023	
	CHECKED BY RCARLESCO	01/06/2023	
	APPROVED BY GUTTADAURO	01/06/2023	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY USB 4.0		PRODUCT DESCRIPTION USB 4.0 Adapter, 40 GBPS, U/D Connector, M-F
	SIZE A	CAGE CODE 3SVT8	ITEM NO. CAU4C-UDADP-MF
	SCALE: NONE	CAD FILE: SU4C-UDADP-MF.SLDDRW	SHEET 1 OF 1