


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISION				
ZONE	REV	DESCRIPTION	DATE	CHANGED BY
	A	INITIAL RELEASE	01/17/2024	BZHANG
				GUTTADAURO



P1
RJ45 SHIELDED MODULAR PLUG
GOLD PLATED CONTACTS
(8P8C)

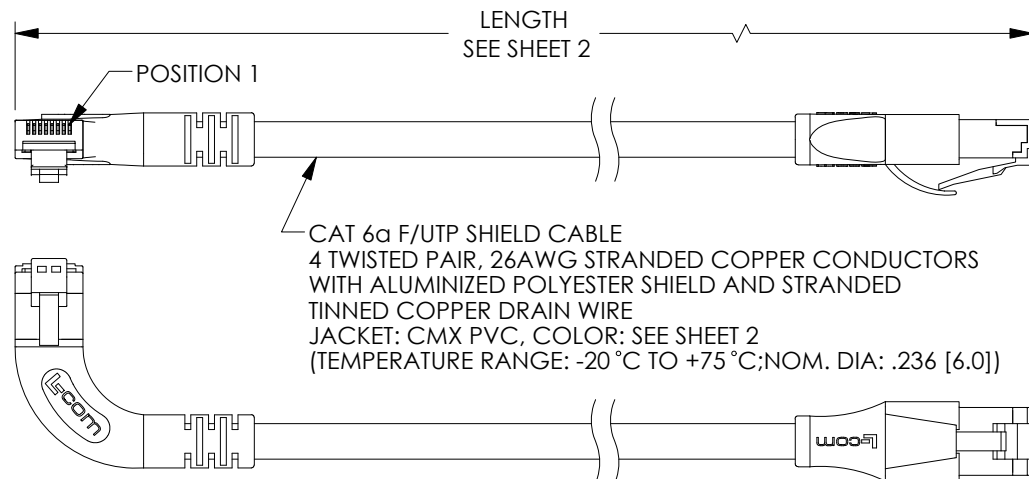

P2
RJ45 SHIELDED MODULAR PLUG
GOLD PLATED CONTACTS
(8P8C)

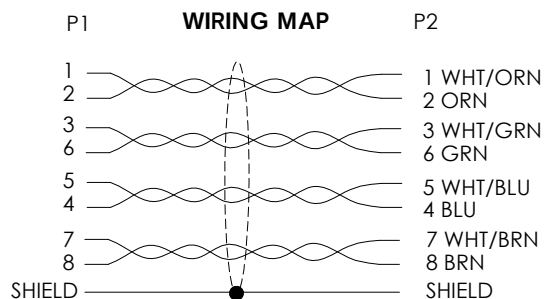

NOTES:

1. PLUG CONFORMS TO TIA-1096.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY BZHANG		10/05/2023	
≤12 [305] = +1 [25] / -0		CHECKED BY GUTTADAURO		10/05/2023	
>12 [305] ≤60 [1524] = +2 [51] / -0		APPROVED BY GUTTADAURO		10/05/2023	
>60 [1524] ≤120 [3048] = +4 [102] / -0		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
>120 [3048] ≤300 [7620] = +6 [152] / -0		COLOR VARIATIONS MAY OCCUR		C6A PVC F/UTP STR-LFT	
>300 [7620] = +5% / -0		SIZE A		CAGE CODE 43321	
ALL OTHER DIMENSIONAL TOLERANCES:		ITEM NO. TRD695ASRA6		REV. A	
.X = ± .2 [5] FRACTIONS ± 1/32		SCALE: NONE		CAD FILE: TRD695ASRA6.SLDDRW	
.XX = ± .02 [.5] ANGLES ± 1°		SHEET 1 OF 2			
.XXX = ± .005 [.13]					
THIRD-ANGLE PROJECTION					

