
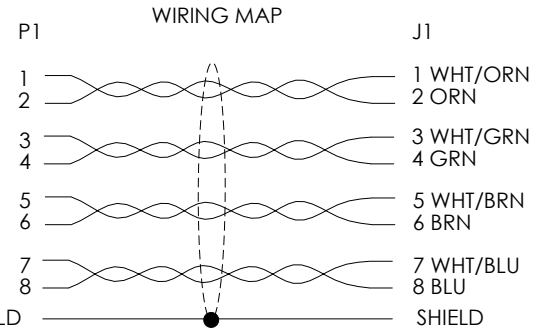
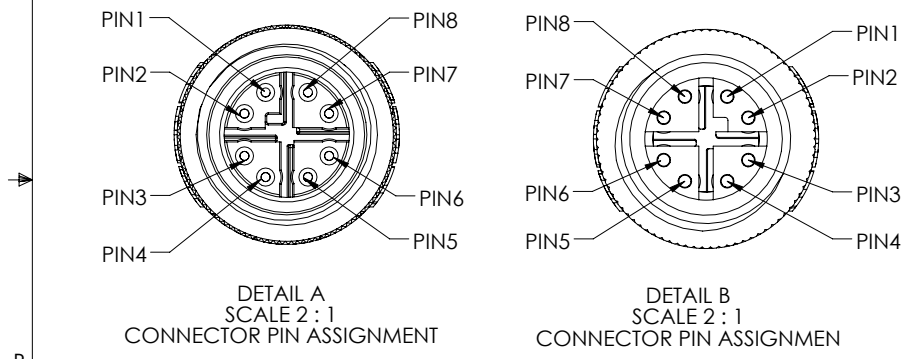


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/23/16	D.GRIFFIN
B	ECN 8810:CHANGED IP RATING TO IP67 . MOLDED HOOD ADD FOUR LOCATION HOLES	06/08/17	D.CUI

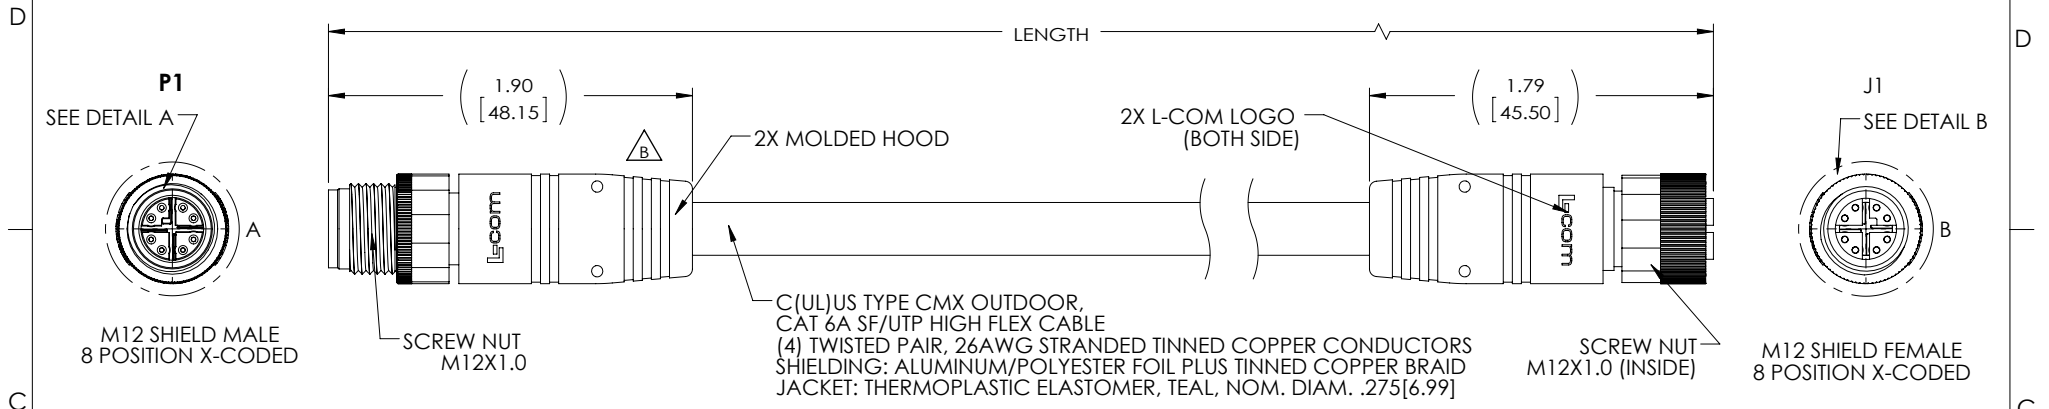

PARTNUMBER	LENGTH	
	FEET	METERS
TRG608-T6T-1M	3.28	1.0
TRG608-T6T-2M	6.56	2.0
TRG608-T6T-3M	9.84	3.0
TRG608-T6T-5M	16.41	5.0
TRG608-T6T-10M	32.82	10.0

NOTES

MATERIAL:
MOLDED HOOD: THERMOPLASTIC POLYURETHANE, BLACK
INSULATOR: NYLON, BLACK
SHELL/SCREW NUT: BRASS, NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE, 15" MIN. GOLD PLATE

ELECTRICAL:
NOMINAL VOLTAGE RATING: 48 VAC/VDC
MAX CURRENT: 0.5A

APPLICATION:
INGRESS PROTECTION RATING IS IP67 (MATED).

ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -40°C TO +75°C

MISCELLANEOUS
CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY WIRED TO IEC 61076-2-109 STANDARDS
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	APPROVALS DRAWN BY D.CUI CHECKED BY D. DESJARDIN APPROVED BY D. GUTSDAURO	DATE 02/24/16 03/10/16 03/10/16	L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR		
	PRODUCT DESCRIPTION C6A M12X M/F TPE 26 TEL		SIZE A	FSCM NO. 43321	DWG. NO. TRG608-T6T
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: TRG608-T6T.SLDDRW	REV. B