

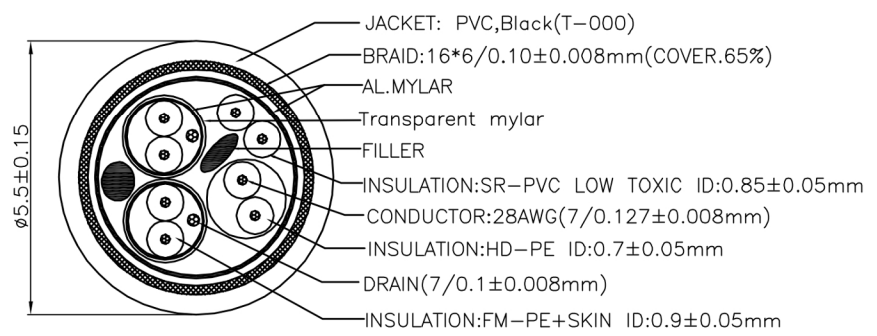


REV.	REVISION HISTORY	DATE

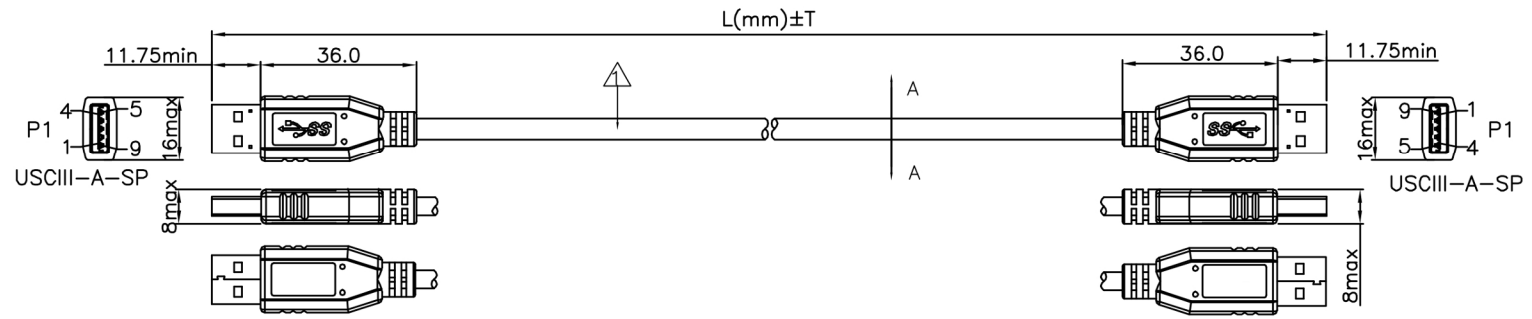

SEC A-A SCALE:NTS

- NOTES:
1. USB 3.0 CABLE, SEE SEC A-A.  
 [UL20276(Rev 3.0)(1P#28+D+AL+Mylar)\*2C+1P#28+2C#28-R0+AL+B OD5.5 Black(T-000)]
  2. CABLE MARKING: USB 3.0 Cable E318727 A AWM 20276 80°C 30V VW-1 DAEC.
  3. CONNECTOR: P1 & P2: USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE PA46 INSULATION, GOLD PLATED 30 " CONTACTS, NICKEL PLATED SHELL.
  4. ALL HOOD: MOLDED Black(T-000) PVC.
  5. ALL MATERIALS ARE RoHS COMPLIANT.
  6. TESTING: 100% ELECTRICAL TEST AT 2M OHM INSULATION RESISTANCE.
  7. PACKAGE: EACH CABLE IN A CTG US ZIP LOCK.

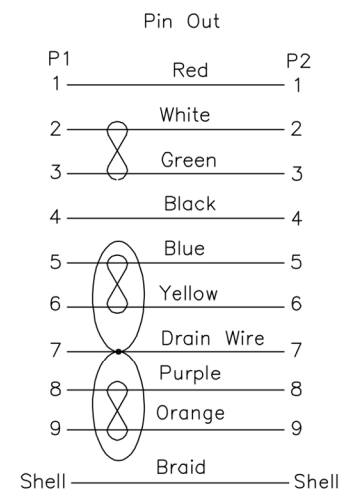

MANUFACTURED IN CHINA



P/N	CHART	FT	M	L	T
54170	3.28	1	1000	+50/-20	
54171	6.56	2	2000	+70/-20	
54172	9.84	3	3000	+100/-30	

DRAWING APPROVED _____		DATE _____	
SAMPLE APPROVED PER _____		DRAWING SPECIFICATIONS _____	
PROPRIETARY & CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CABLES TO GO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CABLES TO GO IS PROHIBITED.			
<input type="checkbox"/> DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED X160±3 XX16 XXX16 ANGLES 16	TITLE <b>USB3.0 CABLE A TO A</b>	CUS. NAME	ENG. DATE
<input type="checkbox"/> REV. X0 CUS. REV.	CUS. P/N	DWG. NO.	CHECKED DATE
			APPROVED DATE

