
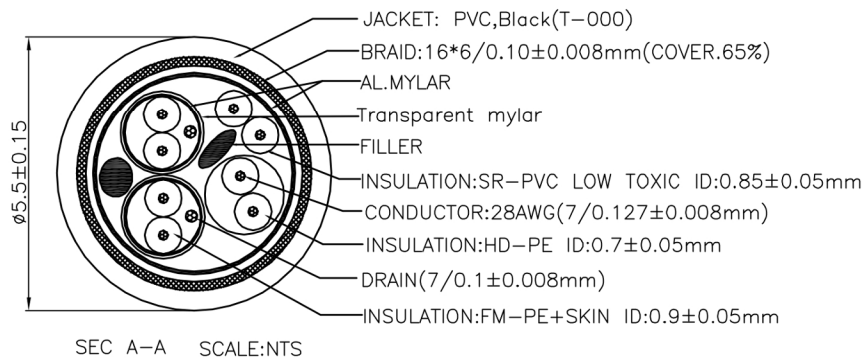


REV.	REVISION HISTORY	DATE

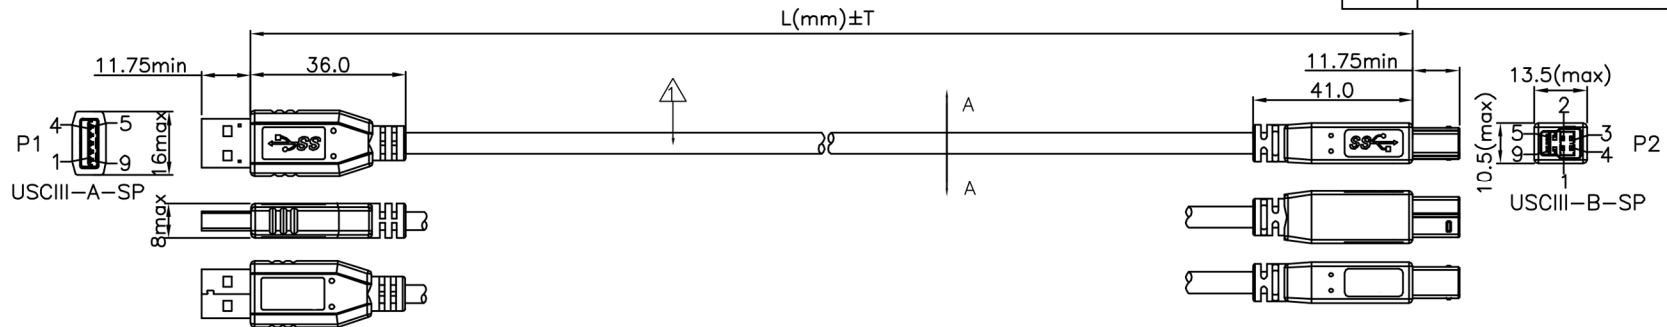

P1	Pin Out	P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
5	Blue	5
6	Yellow	6
7	Drain Wire	7
8	Purple	8
9	Orange	9
Shell	Braid	Shell

NOTES:

1. USB 3.0 CABLE, SEE SEC A-A.
[UL20276(Rev 3.0)](1P#28+D+AL+Mylar)*2C+1P#28+2C#28-R0+AL+B OD5.5 Black(T-000)]
2. CABLE MARKING: USB 3.0 Cable E318727  AWM 20276 80°C 30V VW-1 DAEC.
3. CONNECTOR: P1: USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE PA46
INSULATION, GOLD PLATED 30 " CONTACTS, NICKEL PLATED SHELL.
P2: USB 3.0 B TYPE MALE, SOLDER TYPE, BLUE PBT INSULATION,
GOLD PLATED 30 " CONTACTS, NICKEL PLATED SHELL.
4. ALL HOOD: MOLDED Black(T-000) PVC.
5. ALL MATERIALS ARE RoHS COMPLIANT.
6. TESTING: 100% ELECTRICAL TEST AT 2M OHM INSULATION RESISTANCE.
7. PACKAGE: EACH CABLE IN A CTG US ZIP LOCK.

MANUFACTURED IN CHINA



P/N	CHART			
54173	3.28	1	1000	+50/-20
54174	6.56	2	2000	+70/-20
54175	9.84	3	3000	+100/-30
P/N	FT	M	I	T

DRAWING APPROVED _____		DATE _____	
SAMPLE APPROVED PER _____		DATE _____	
DRAWING SPECIFICATIONS _____		DATE _____	
PROPRIETARY & CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CABLES TO GO. ANY REPRODUCTION IN WHOLE OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CABLES TO GO IS PROHIBITED.			
	mm	USB3.0 CABLE A TO B CUS. NAME _____	
SCALE	NONE		
SHEET	1/2	ENG.	DATE _____
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		CUS. P/N _____	
X/60-3	XX 15	CHECKED	DATE _____
XXX 16	ANGLES 16	DWG. NO.	
REV. X0	CUS. DEV.	APPROVED	DATE _____