

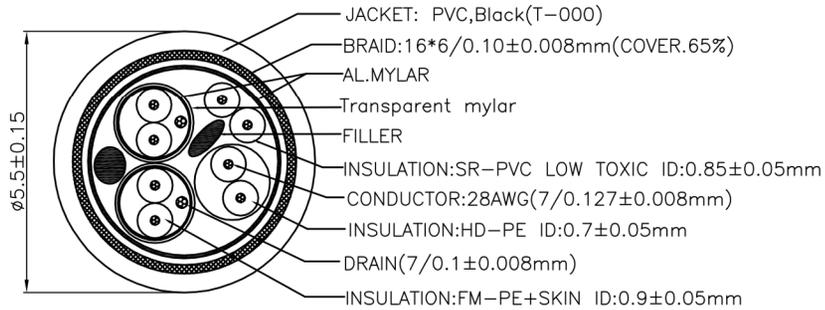


REV.	REVISION HISTORY	DATE

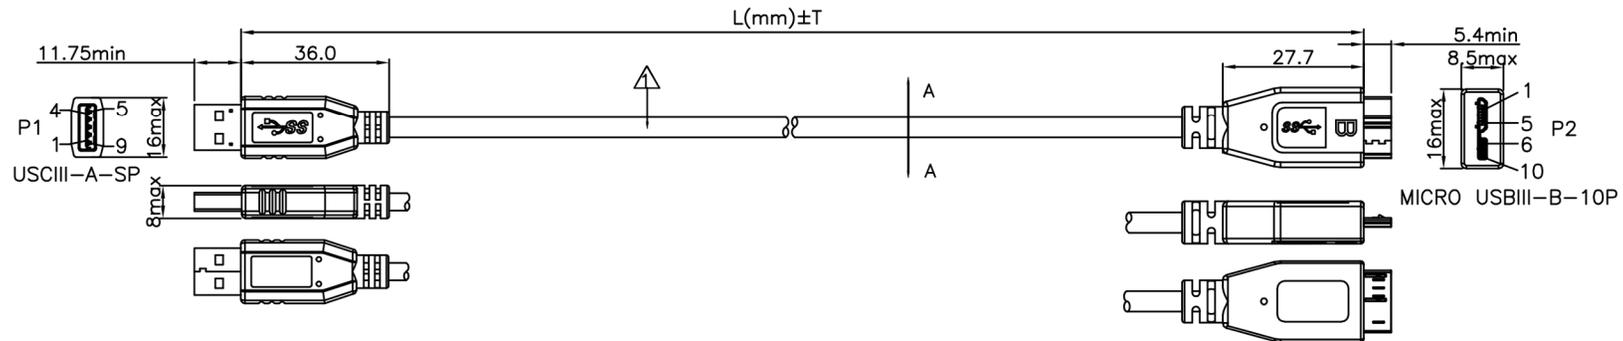

SEC A-A SCALE:NTS

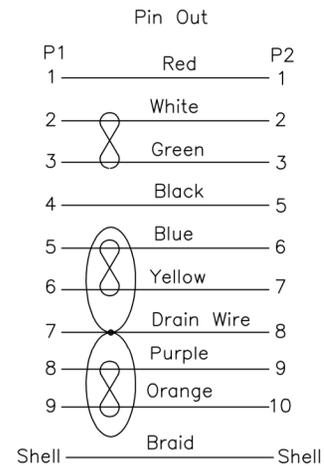

NOTES:

1. USB 3.0 CABLE, SEE SEC A-A.  
[UL20276(Rev 3.0)(1P#28+D+AL+Mylar)\*2C+1P#28+2C#28-RO+AL+B OD5.5 Black(T-000)]
2. CABLE MARKING: USB 3.0 Cable E318727 A AWM 20276 80°C 30V VW-1 DAEC.
3. CONNECTOR: P1: USB 3.0 A TYPE MALE, SOLDER TYPE, BLUE PA46 INSULATION, GOLD PLATED 30# CONTACTS, NICKEL PLATED SHELL.  
P2: USB 3.0 MICRO B TYPE MALE, SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED 30# CONTACTS, NICKEL PLATED SHELL.
4. ALL HOOD: MOLDED Black(T-000) PVC.
5. ALL MATERIALS ARE RoHS COMPLIANT.
6. TESTING: 100% ELECTRICAL TEST AT 2M OHM INSULATION RESISTANCE.
7. PACKAGE: EACH CABLE IN A CTG US ZIP LOCK.

MANUFACTURED IN CHINA



P/N	FT	M	L	T
54176	3.28	1	1000	+50/-20
54177	6.56	2	2000	+70/-20
54178	9.84	3	3000	+100/-30
P/N	FT	M	L	T

DRAWING APPROVED _____		DATE _____	
SAMPLE APPROVED PER DRAWING SPECIFICATIONS _____		DATE _____	
PROPRIETARY & CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CABLES TO GO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CABLES TO GO IS PROHIBITED.			
TITLE USB3.0 CABLE A TO Micro B		Show Me CABLES	
SCALE NONE	CUS. NAME	ENG.	DATE
SHEET 1/2	CUS. P/N	CHECKED	DATE
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		APPROVED	
<input type="checkbox"/> X160:3	XX 16	DATE	
<input type="checkbox"/> XXX 16	ANGLES 16	DATE	
REV. X0	CUS. REV.	DATE	