

6

5

4


3

2

1

## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-15142	01/29/2026	TDUFRENE	DGUST

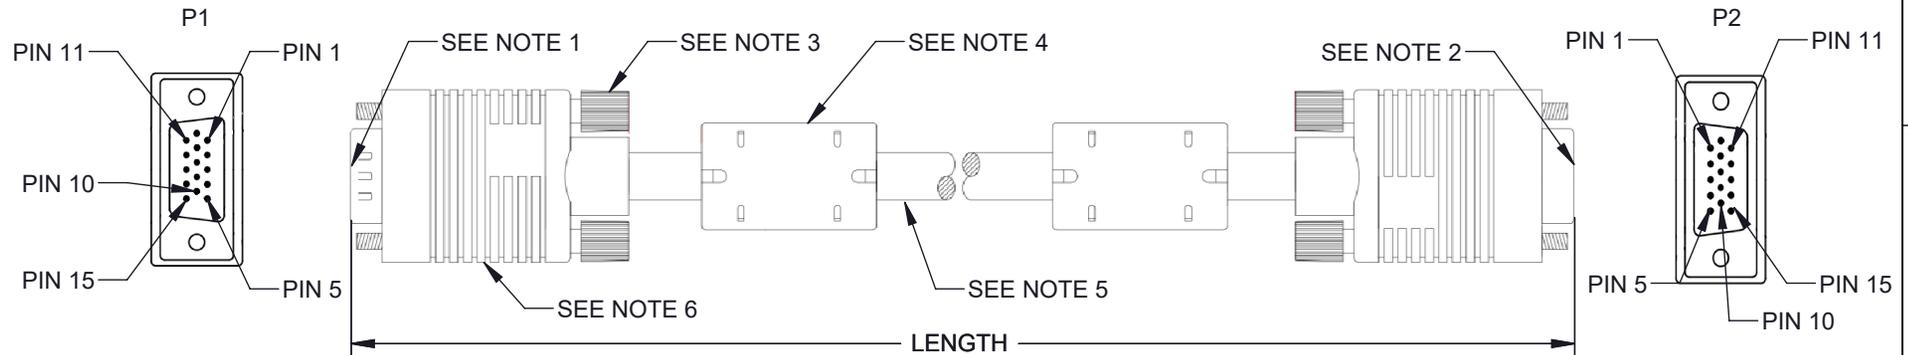

## WIRING MAP

P1		P2	
1	—	1	RED CONDUCTOR
6	—	6	RED SHIELD
2	—	2	GREEN CONDUCTOR
7	—	7	GREEN SHIELD
3	—	3	BLUE CONDUCTOR
8	—	8	BLUE SHIELD
4	—	4	BROWN
14	—	14	BROWN/WHITE
5	—	5	RED
12	—	12	RED/WHITE
9	—	9	YELLOW
10	—	10	ORANGE
13	—	13	ORANGE/WHITE
11	—	11	BLACK
15	—	15	BLACK/WHITE
SHIELD	—	SHIELD	SHIELD

1. HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
2. HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
3. MOLDED THUMBSCREW #4-40, LENGTH 49mm, BLACK
4. MOLDED PVC BLACK  
FERRITE CORE 17.5\*10.5\*28.5mm
5. UL2919[[28AWG+AL+S(29/0.10mmTS)]\*3COAXIAL+(28AWG\*4.5P)], AL+D  
28#+AMA, BRAID(47%), OD:8.8mm, JACKET BLACK GROOVE
6. MOLDED PVC BLACK  
MOLDED PE COLOR TRANSPARENT  
ALUMINUM FOIL 33\*65mm  
BLACK HEAT SHRINK TUBE Ø1.5\*10mm  
BLACK HEAT SHRINK TUBE Ø3.0\*10mm  
BLACK PVC TUBE Ø3.0\*22mm
7. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
8. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]  
 .XX = ±.02 [0.5]  
 .XXX = ±.005 [0.13]  
 FRACTIONS  
 ± 1/32  
 ANGLES ± 1°


CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**Show Me™**  
**CABLES**

an INFINIT® brand

Website: [www.ShowMeCables.com](http://www.ShowMeCables.com)  
Phone: 1.888.519.9505



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

## DESCRIPTION

PREMIUM VGA MONITOR EXTENSION CABLE - MALE/FEMALE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	TDUFRENE	43-347-XXX	B

6

5

4

3

2

1